MACHINERY & PRODUCTION LINES · JÁSZBERÉNY, HUNGARY

Refrigerator Manufacturing Plant

Every machine of the plant grouped into halls, equipment categories and complete process lines. Each station shows the machine placed from the listing with its original photograph, or NOT AVAILABLE where the listing has nothing.







Refrigerator Manufacturing Plant
Jászberény, Hungary · Domestic refrigerators · ~440,000 a year
5 halls · 14 lines · 40 stations · 31 lots · 90 photographs · 6 not available

CONTENTS

What is in this brochure

1	Refrigerator Manufacturing Plant	Plant overview and site plan, 5 halls with 14 production lines and areas, one page per line with its 3D view, machines and photographs
2	Equipment catalogue by category	Category-wise machinery summary and every lot with its catalogue sheet or photographs
3	Not available	Stations with no machine in the listings, to be sourced separately

Station key

- Machine placed
- Alternate machine
- With press / line
- Suggested reuse
- Shared
- NOT AVAILABLE

JÁSZBERÉNY, HUNGARY · DOMESTIC REFRIGERATORS · ~440,000 A YEAR

Refrigerator Manufacturing Plant

Contents of a domestic refrigerator factory with an annual output of about 440,000 units, offered as a complete plant. The 31 listings are grouped into 5 halls that follow the refrigerator process: coil cutting and panel forming, sheet extrusion and liner thermoforming, evaporators and insulation panels, powder coating, and cabinet and door foaming with packing.

5	14	40	33	31	31	90	6
Halls	Lines & areas	Stations	Machines placed	Catalogue lots	Units	Photographs	Not available








Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · SITE PLAN

Plant layout

Every hall as a plan view from its 3D model, with the number of lines and the approximate footprint. Halls are arranged for overview and are not to scale between each other.

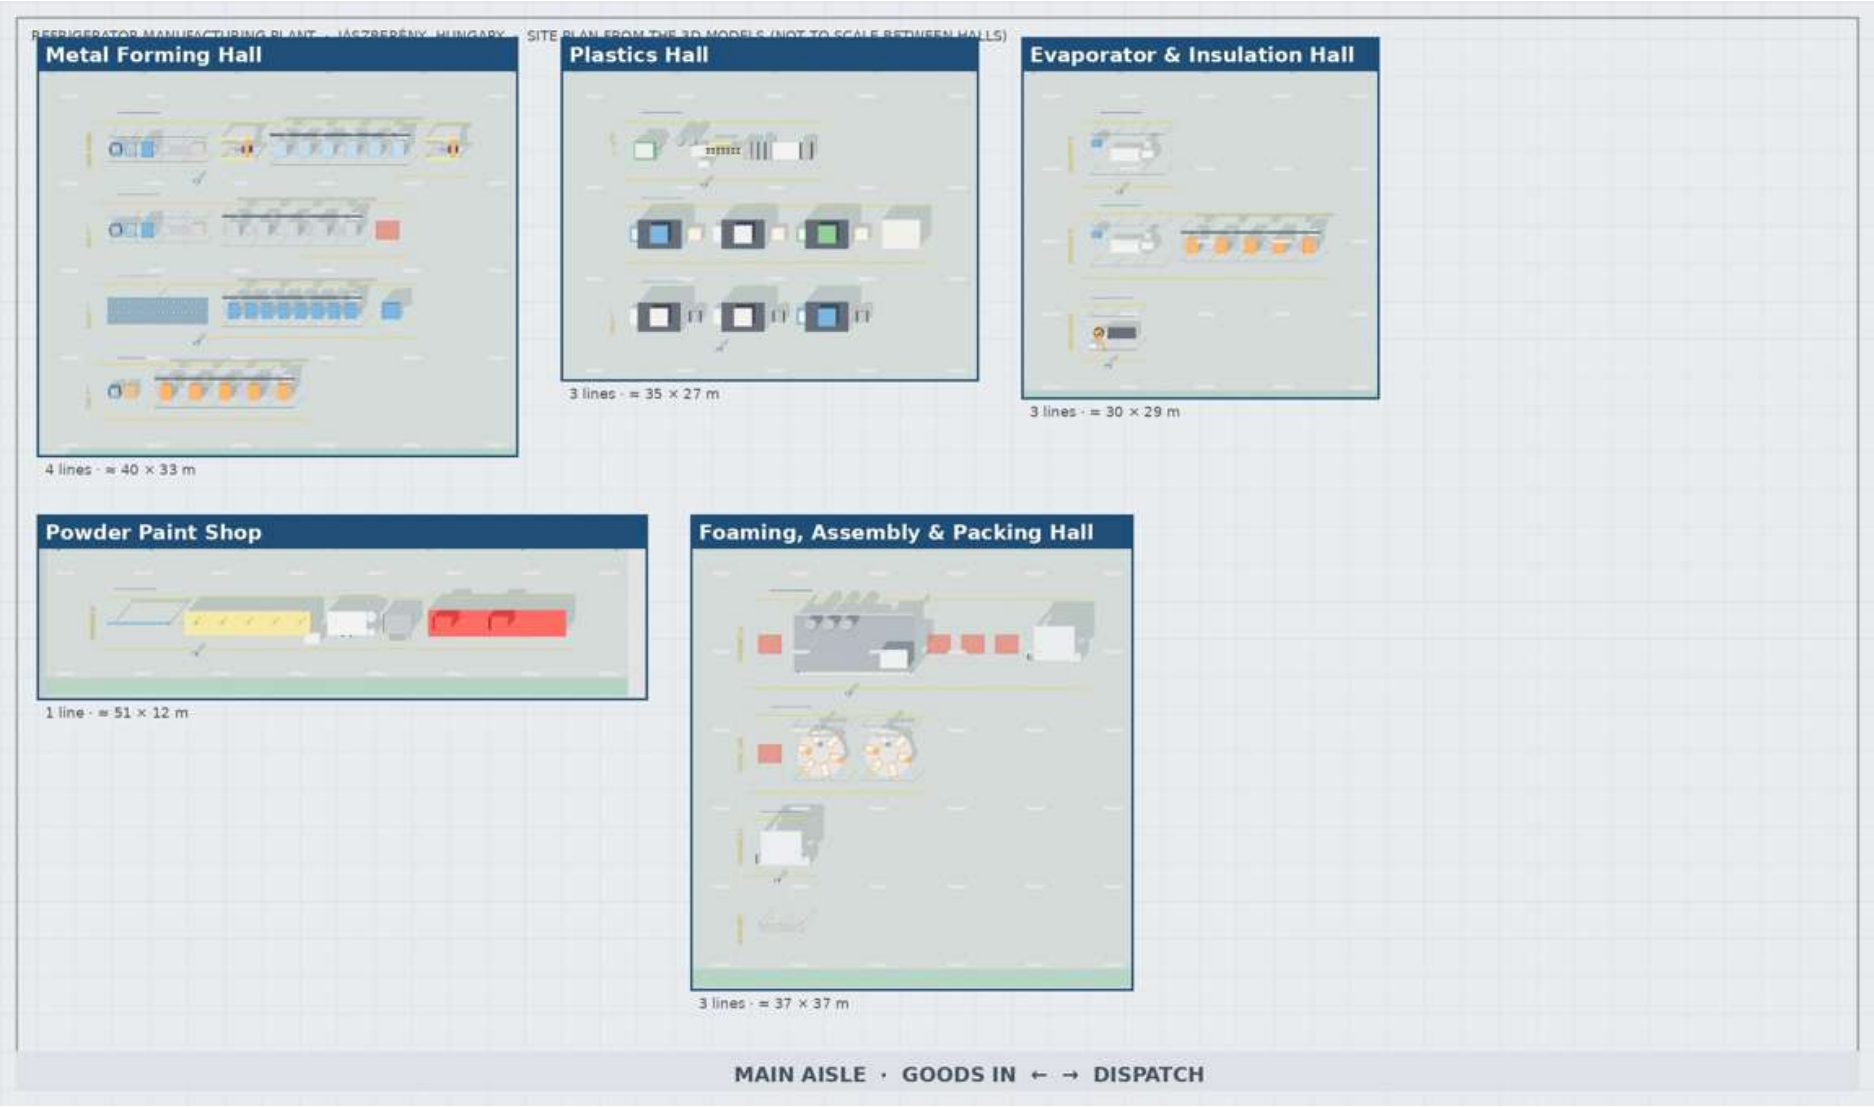

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALLS

Halls and departments

Hall / department	Lines / areas	Stations	Not available	What it covers
Metal Forming Hall	4	12	1	Coil cutting and sheet-metal forming of side, door and top panels
Plastics Hall	3	9	0	Sheet co-extrusion, liner thermoforming, laser punching and regrind
Evaporator & Insulation Hall	3	4	0	Freezer and wrapped evaporators, vacuum insulation panels
Powder Paint Shop	1	5	0	Washing, powder coating and curing on a 388 m overhead conveyor
Foaming, Assembly & Packing Hall	3	10	5	Cabinet and door foaming, final assembly, test and shrink-hood packing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALL


Metal Forming Hall

Pre-painted steel coils are cut to length, then formed into cabinet side panels (wrap-around), door panels and top panels on four automatic punching and bending lines.



Plan view from the 3D model

Line	Process	Stations	Not available
Side Panel Line	COSMA line fed by the QS cut-to-length press	4	0
Door Panel Line A	MAS line, sheets from the Sacma slitting line	3	1
Door Panel Line B	TEAS 12-station line	3	0
Top Panel Line	QS coil-fed shearing, bending and punching	2	0

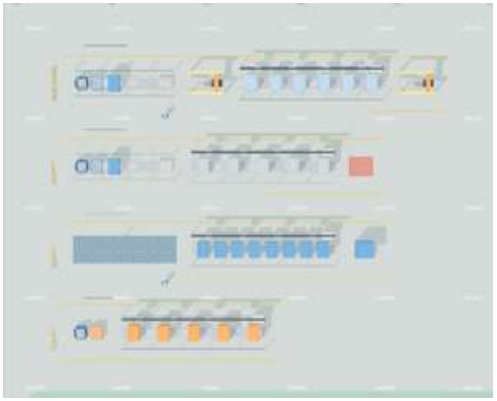


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 01

Side Panel Line

COSMA line fed by the QS cut-to-length press · 4 stations · 4 machines placed

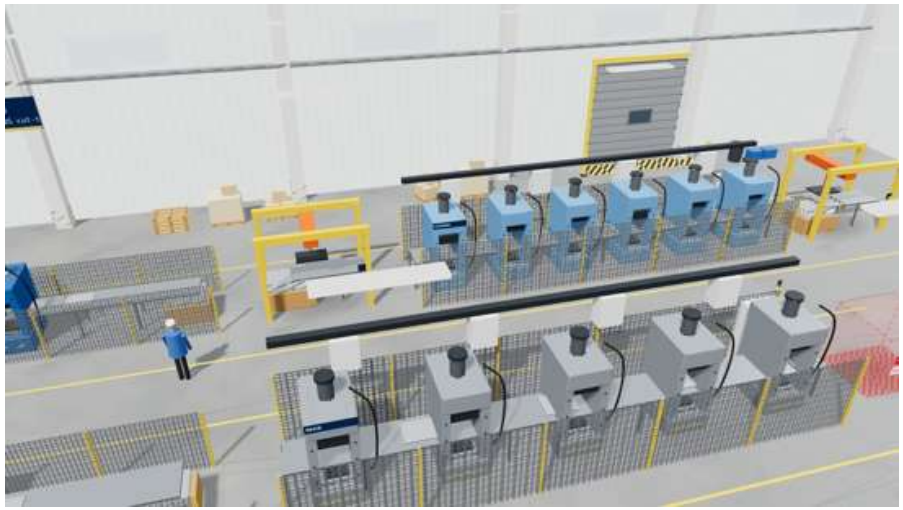

#	Station	Status	Machine / lot
01	**Coil decoiling & cut-to-length**	Machine placed	6022006 QS metal sheet cutting press (cut-to-length line) · 2004 · 400 V 50 Hz · 20 m/min (max 30) Coil 500–900 mm wide, sheet up to 2100 mm, 0.4–0.6 mm. Changeover about 15 min.
02	**Sheet check & loading**	Machine placed	6022004 COSMA sheet checking and automatic loading (part of line) · 2018 · 400 V 50 Hz · 10 s per panel Sheet size and weight check, automatic loading. Part of the COSMA line.
03	**Punching, bending & cutting (6 stations)**	Machine placed	6022004 COSMA metal sheet forming line (side panels) · 2018 · 400 V 50 Hz · 10 s per panel Sheet checking for size and weight, 6 bending/punching/cutting stations, automatic loading/unloading, 2 KUKA pick-and-place robots, fenced 67 m area.
04	**Robot unloading & stacking**	Machine placed	6022004 2 × KUKA pick-and-place robots (part of COSMA line) · 2018 · 400 V 50 Hz · 10 s per panel Two KUKA robots with controllers unload the formed side panels.



Coil decoiling & cut-to-length




Sheet check & loading

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 02

Door Panel Line A

MAS line, sheets from the Sacma slitting line · 3 stations · 2 machines placed · 1 not available

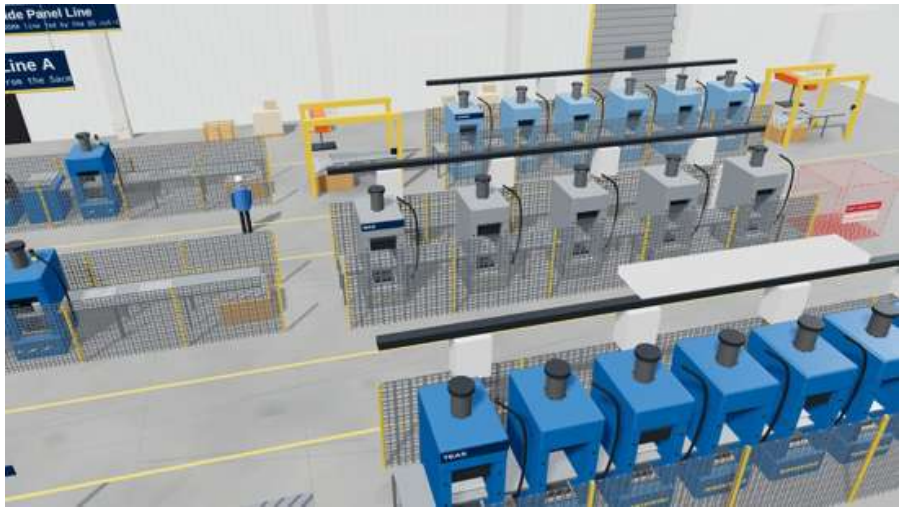

#	Station	Status	Machine / lot
01	**Coil slitting & cut-to-length**	Machine placed	6022003 Sacma cutting and slitting line · 1975 · 400 V 50 Hz · decoiling up to 12 m/min Coil 300–1280 mm wide, max 12 t; sheet 450–3000 mm; 0.4–1.0 mm thick.
02	**Punching & bending**	Machine placed	6022001 MAS metal sheet forming line (fridge door panels) · 2023 · 400 V 50 Hz · air 4.5–6 bar · 10 s cycle Laser-measured sheet loading, punching/bending station with 2 blade sets, 2 spare forming slots, 2nd punching station, 2 scrap conveyors, Siemens S7. 89,963 pieces made.
03	**Door panel stacking robot**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing



Coil slitting & cut-to-length



Punching & bending

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 03

Door Panel Line B

TEAS 12-station line · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Coil slitting & cut-to-length**	Shared	6022003 Sacma cutting and slitting line · 1975 · 400 V 50 Hz · decoiling up to 12 m/min Uses the Sacma slitting line placed on Door Panel Line A.
02	**Punching, bending & fixing insertion (12 stations)**	Machine placed	6022005 TEAS metal sheet forming line (fridge door panels) · 2010 · 400 V 50 Hz · 27 s cycle 12 stations for punching, long-side and short-side bending and mechanical insertion of fixings.
03	**Extra punching**	Machine placed	6022015 Konkoly punching machine · 2020 · 400 V · 40 A · 6 bar About 30 s cycle; 10–30 min changeover depending on tooling. 5,500 kg.



Coil slitting & cut-to-length



Punching, bending & fixing insertion (12 stations)



Extra punching

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 04

Top Panel Line

QS coil-fed shearing, bending and punching · 2 stations · 2 machines placed





Coil decoiling

#	Station	Status	Machine / lot
01	**Coil decoiling**	Machine placed	6022002 QS coil uncoiler and feeder (part of line) · 2004 · 400 V 50 Hz · 25 s cycle · coil 632 × 0.5 mm Coil 632 mm × 0.5 mm feeds the line directly.
02	**Shearing, bending & punching (R89–R189)**	Machine placed	6022002 QS metal sheet forming line (top panels) · 2004 · 400 V 50 Hz · 25 s cycle · coil 632 × 0.5 mm Coil-fed shearing, bending and punching stations R89, R109, R125, R145, R157, R189. Automatic changeover.

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALL


Plastics Hall

Plastic sheet is co-extruded on the Battenfeld line, wound into rolls or cut into sheets, and vacuum-formed into cabinet inner liners and door liners. Scrap is ground back into the extruder.



Plan view from the 3D model

Line	Process	Stations	Not available
Sheet Extrusion Line	Battenfeld co-extrusion with regrind	2	0
Inner Liner Line	3 COMI sheet-fed thermoformers + laser punching	4	0
Door Liner Line	3 roll-fed thermoformers	3	0

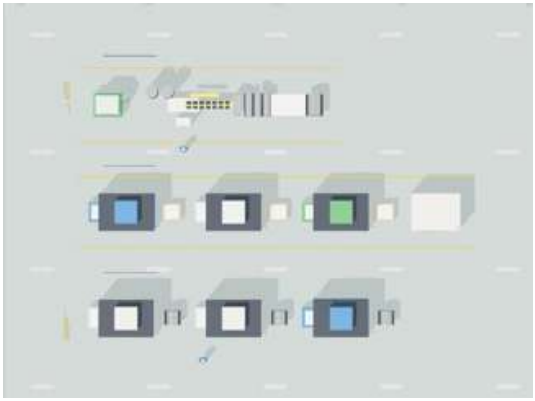

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · PLASTICS HALL · LINE 01

Sheet Extrusion Line

Battenfeld co-extrusion with regrind · 2 stations · 2 machines placed





Granulate feeding & regrind



Co-extrusion, calendering & winding

#	Station	Status	Machine / lot
01	**Granulate feeding & regrind**	Machine placed	6022009 Rapid 500-120 granulator (1200 kg/h) · 2003 · 37 kW · rotor Ø450 mm Up to 1,200 kg/h (≈450–500 kg/h on liner scrap). 3-blade open rotor, 8 mm screen, 3,600 kg.
02	**Co-extrusion, calendering & winding**	Machine placed	6022008 Battenfeld BEX-1-150-32-D-V / BEX 45-25E co-extrusion sheet line · 1999 · 50 Hz · 6 bar · 1000–1200 kg/h 2 feed silos, metal separators, main extruder 7 heating zones + vacuum zone, co-extruder 3 zones, 3 calenders, thickness gauge, corona treatment, automatic coil changing, edge slitting. Sheet 1–5 mm, up to ~1480 mm wide.

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · PLASTICS HALL · LINE 02

Inner Liner Line

3 COMI sheet-fed thermoformers + laser punching · 4 stations · 4 machines placed



#	Station	Status	Machine / lot
01	**Thermoforming 1**	Machine placed	6022010 COMI BL 2200x900x600 thermoforming machine (inner liners) · 2013 · 380 V 50 Hz · 269 kW Forming 2200 × 900 mm, depth 600 mm, 3 loading stations, heating station, pressure + vacuum forming, 4 trimming presses (guillotine). 400 kN platen. 30 t.
02	**Thermoforming 2**	Machine placed	6022011 COMI thermoforming machine (inner liners) · 2007 · 375 kW Forming 2005 × 905 mm, depth 550 mm, 3 loading stations, 750 m³/h vacuum, 4 trimming presses. 35 t.
03	**Thermoforming 3**	Machine placed	6022013 COMI SL200x90 NG DX thermoforming machine (inner liners) · 1993 · 399 kW Mould base 2000 × 900 mm, part height 550 mm, 570 m³/h vacuum, 4,000 L tanks. 25 t.
04	**Laser punching of liners**	Machine placed	6022016 ELEN Blade RF 333 laser cutting cell on ABB robot (inner-liner punching) · 2013 · 400 V 50 Hz · 600 W laser ABB robot with IRC5 controller (36,000 h), enclosure, turning table and air extraction. About 60 s cycle.



Thermoforming 1



Thermoforming 2



Thermoforming 3



Laser punching of liners

REFRIGERATOR MANUFACTURING PLANT · PLASTICS HALL · LINE 03

Door Liner Line

3 roll-fed thermoformers · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Roll-fed thermoforming 1**	Machine placed	6022007 QS VF-20-08-02 roll-feed thermoforming machine (door liners) · 2003 · 400 V 50 Hz · 280 kW · 465 A Roll unwind (max Ø1200, 570–850 mm wide), upper/lower heating 2 × 67.2 kW, forming, clamping ring, pre-stretch/cooling dome, 2 × 240 m³/h vacuum pumps. Workshop manuals.
02	**Roll-fed thermoforming 2**	Machine placed	6022012 Illig UA 200/1g thermoforming machine (door liners) · 1999 · 3 × 380–400 V · ~105 kW Forming 1960 × 960 mm, draw depth 600 mm, roll-fed (QS unwind Ø1200), ±0.2 mm indexing.
03	**Roll-fed thermoforming 3**	Machine placed	6022014 COMI HEDL 2000x800x200 thermoforming machine (door liners) · 2014 · 264 kW Coil-fed 580–900 mm, frame 2004 × 804 mm, part height 150/200 mm, upper heating 168 kW, trimming press. 20 t.



Roll-fed thermoforming 1



Roll-fed thermoforming 2




Roll-fed thermoforming 3

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALL


Evaporator & Insulation Hall

Aluminium tube and tape are made into freezer-compartment and wrapped evaporators, and vacuum insulation panels are pressed for the cabinets.

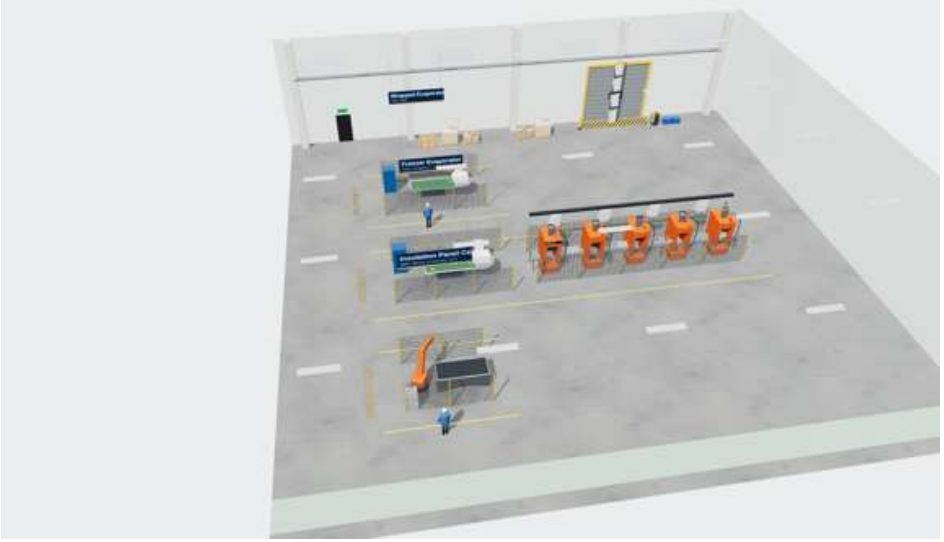

Plan view from the 3D model


Line	Process	Stations	Not available
Wrapped Evaporator Line	TEAS 2013	1	0
Freezer Evaporator Line	TEAS automatic + manual line	2	0
Insulation Panel Cell	KUKA KR210 pressing cell	1	0

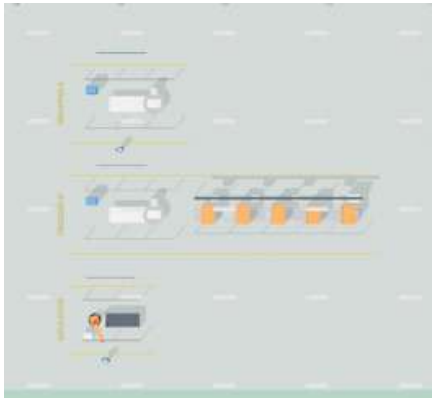

REFRIGERATOR MANUFACTURING PLANT · EVAPORATOR & INSULATION HALL · LINE 01

Wrapped Evaporator Line

TEAS 2013 · 1 stations · 1 machines placed

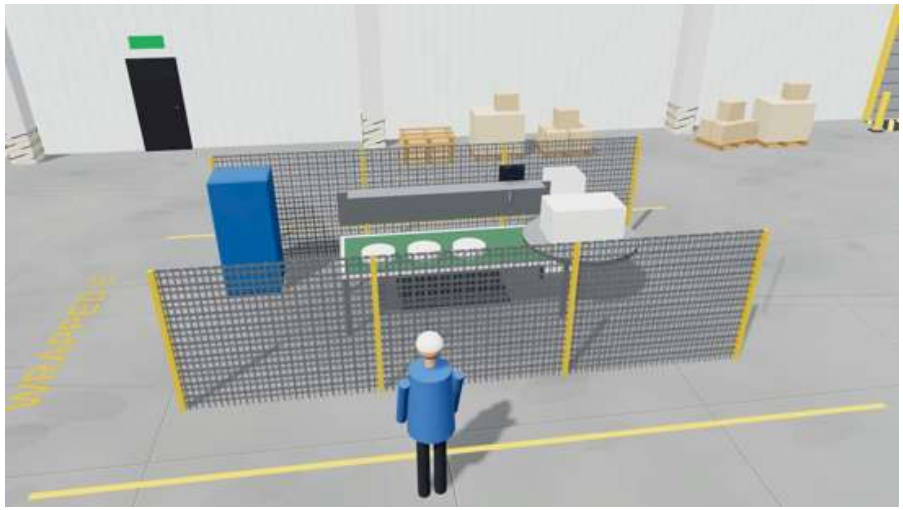



Freezer tape & tube wrapping

#	Station	Status	Machine / lot
01	**Freezer tape & tube wrapping**	Machine placed	6022029 TEAS wrapped evaporator line · 2013 · 80 kW · 400 V · 5.5–6 bar 396 pcs per shift. Freezer tape application, tube wrapping with aluminium tape and conductive paste. Al tube Ø7.5 × 0.75 mm.

REFRIGERATOR MANUFACTURING PLANT · EVAPORATOR & INSULATION HALL · LINE 02

Freezer Evaporator Line

TEAS automatic + manual line · 2 stations · 2 machines placed



#	Station	Status	Machine / lot
01	**Compartment forming & tube taping (automatic)**	Machine placed	6022030 TEAS freezer compartment evaporator line · 1999 · 5.5–6 bar About 400 pcs per shift, 67.5 s cycle. Al sheet 0.35 mm, Al tube Ø7.5 mm.
02	**Compartment forming, tube bending & reduction (manual)**	Machine placed	6022031 Manual freezer compartment evaporator line (combi fridges) Station 1 compartment forming, station 2 tube bending and taping, station 3 tube diameter reduction.



Compartment forming & tube taping (automatic)




Compartment forming, tube bending & reduction (manual)

REFRIGERATOR MANUFACTURING PLANT · EVAPORATOR & INSULATION HALL · LINE 03

Insulation Panel Cell

KUKA KR210 pressing cell · 1 stations · 1 machines placed

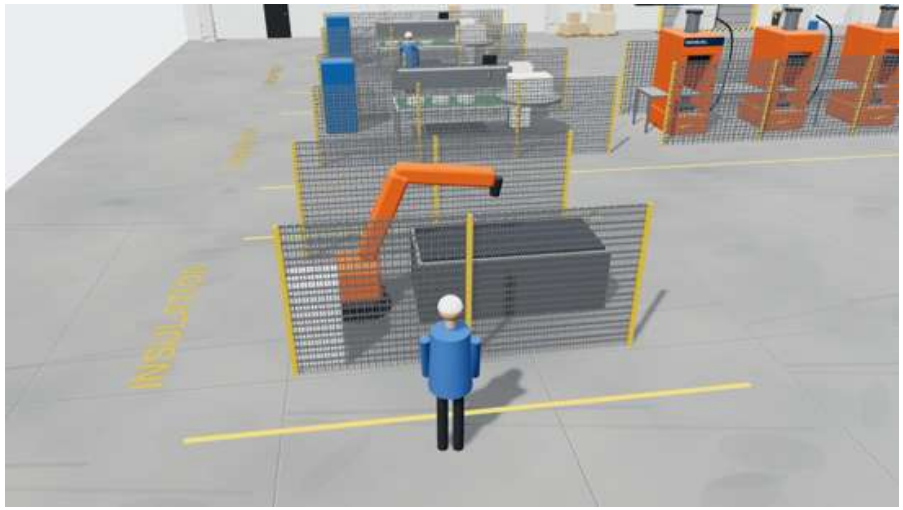




Vacuum insulation panel pressing

#	Station	Status	Machine / lot
01	**Vacuum insulation panel pressing**	Machine placed	6022021 KUKA KR210 L180-2 vacuum insulation panel pressing workstation · 2005 Renewed and installed 2019, about 1 million cycles, table 2500 × 1000 mm, manual load/unload.

REFRIGERATOR MANUFACTURING PLANT · HALL


Powder Paint Shop

Parts hang on the 388 m overhead conveyor and run through the washing tunnel and dryer, the automatic and manual Wagner powder booths, and the 120 m curing oven.

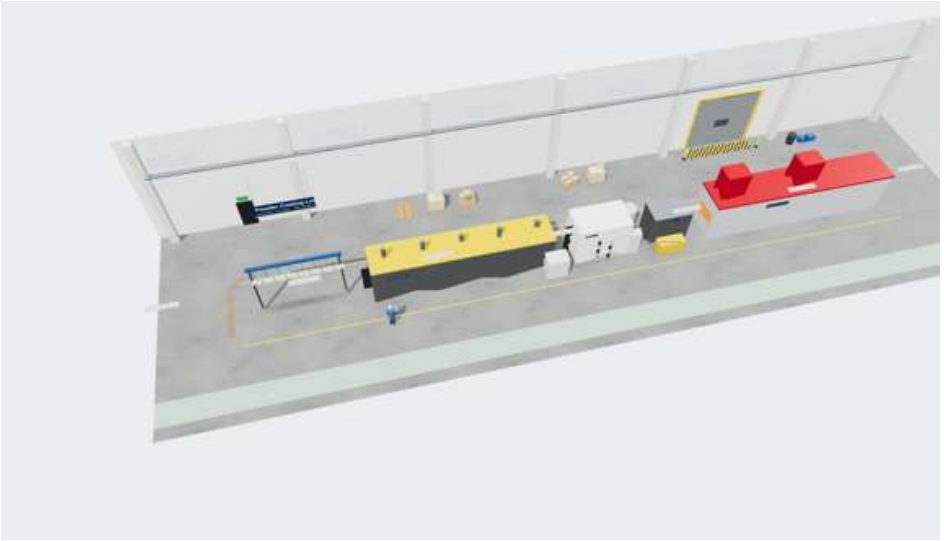

Line	Process	Stations	Not available
Powder Coating Line	Overhead conveyor, 385 hangers	5	0

Plan view from the 3D model

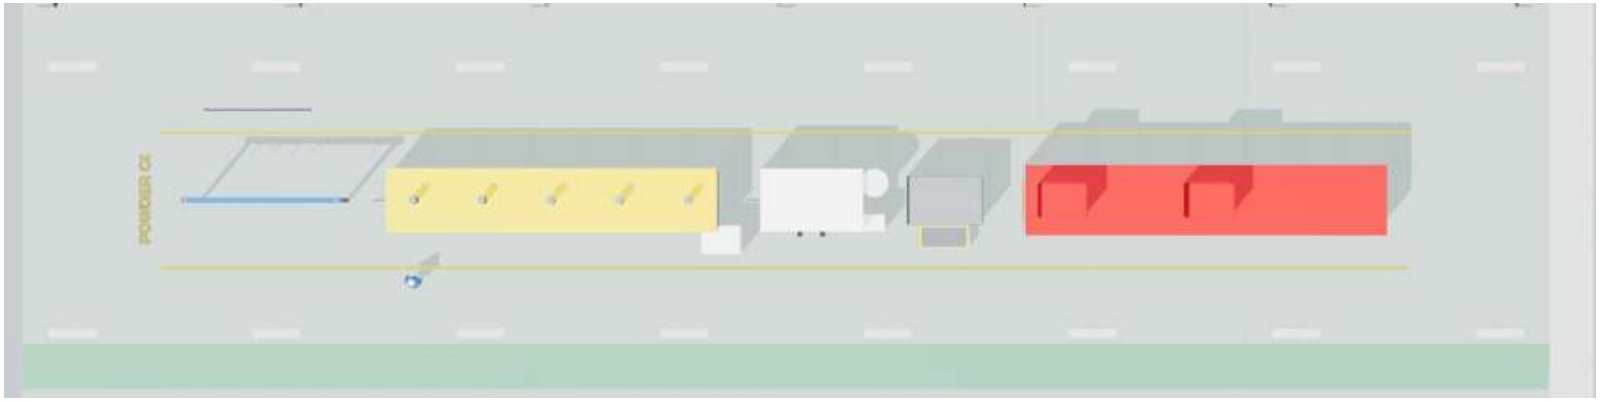


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · POWDER PAINT SHOP · LINE 01

Powder Coating Line

Overhead conveyor, 385 hangers · 5 stations · 5 machines placed

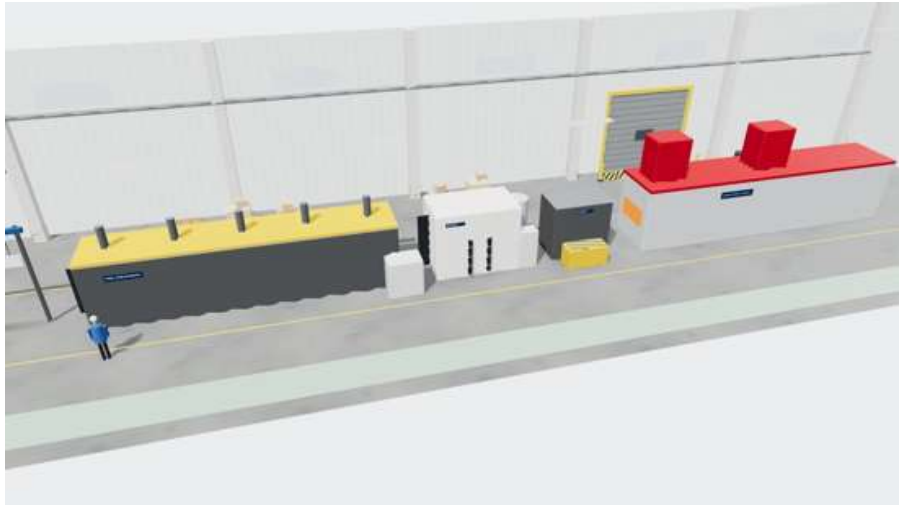

#	Station	Status	Machine / lot
01	**Hanging & overhead conveyor**	Machine placed	6022026 Flex coop powder painting overhead conveyor (388 m) · 2001 · 400 V 50 Hz · 4 m/min 385 hanging points at 800 mm. Chain renewed 2019.
02	**Washing & drying (pre-treatment)**	Machine placed	6022022 Conveyor-fed industrial washing machine (pre-treatment) · 1,200 kW hot-water burner · pumps 8 × 11 kW + 6 × 7 kW Ion-exchange washing tunnel and skid hot-air dryer in snake layout, 60 m each.
03	**Automatic powder coating**	Machine placed	6022024 Wagner automatic powder painting line · 2001 · Wagner Itep control (2019) 2 × 10-nozzle and 2 × 2-nozzle guns, 2 dedusters, paint recovery unit, Parker Hiross oil remover (2019).
04	**Manual touch-up booth**	Machine placed	6022023 Wagner manual powder painting booth · 2001 Twin operator platforms, doors both sides, stainless steel, 2 dedusting units. Not in use.
05	**Curing oven & cooling**	Machine placed	6022025 Paint line drying oven (2 × 630 kW burners) · 2 × 630 kW gas burners Curing oven with cooling zone, total length 120 m.



Hanging & overhead conveyor



Washing & drying (pre-treatment)



Automatic powder coating



Manual touch-up booth



Curing oven & cooling

REFRIGERATOR MANUFACTURING PLANT · HALL


Foaming, Assembly & Packing Hall

Outer cabinets and liners are foamed with polyurethane, doors are foamed on two carousel machines, then units are assembled, charged, tested and shrink-hood packed.



Plan view from the 3D model

Line	Process	Stations	Not available
Cabinet Line	KraussMaffei 8-fixture foaming	6	4
Door Line	2 carousel door foaming machines	3	1
Packing Line 2	Second Thimon shrink-hood	1	0
Support	Workshop, logistics and IT equipment (partner online auctions) (60200000)	1	

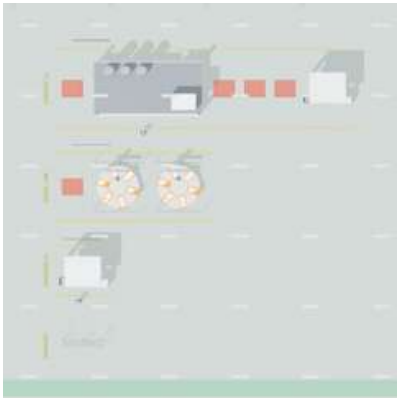


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · FOAMING, ASSEMBLY & PACKING HALL · LINE 01

Cabinet Line

KraussMaffei 8-fixture foaming · 6 stations · 2 machines placed · 4 not available

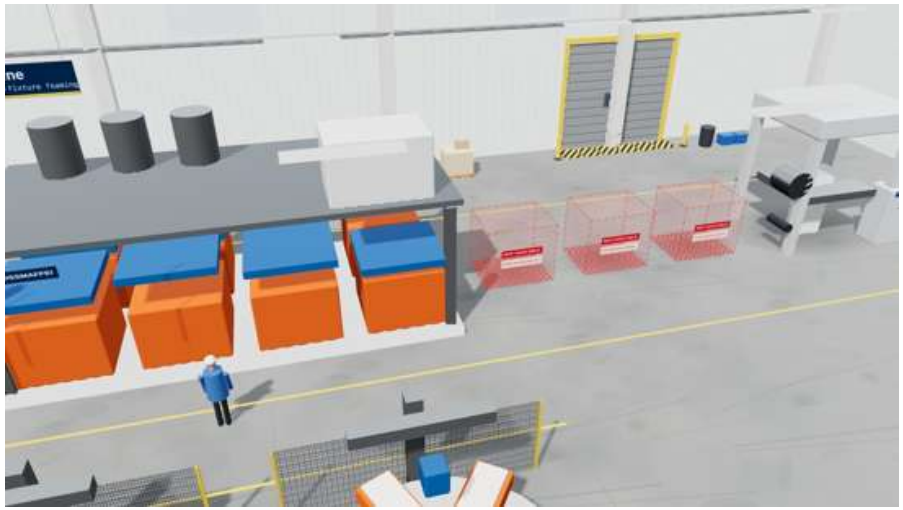

#	Station	Status	Machine / lot
01	**Cabinet pre-assembly (liner into outer cabinet)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
02	**Cabinet foaming**	Machine placed	6022017 KraussMaffei cabinet foaming plant (8 fixtures) · 2008 · Polyol/cyclopentane + isocyanate Dry system: 8 (2 × 4) fixtures, face-up foaming, cabinets on pallets. Wet system on mezzanine: 500 L tanks, pre-mixer, mixing heads 2,000 and 1,300 g/s, ATEX enclosure, mould storage for 54 moulds. Over 5 million cycles.
03	**Final assembly (compressor, piping)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
04	**Refrigerant charging & leak test**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Functional & electrical test**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
06	**Shrink-hood packing**	Machine placed	6022027 Thimon Coverpal 1250 shrink-hood packaging machine · 1999 · Natural-gas shrink hood Over 7 million cycles; product up to 600 × 600 × 2000 mm.



Cabinet foaming




Shrink-hood packing

REFRIGERATOR MANUFACTURING PLANT · FOAMING, ASSEMBLY & PACKING HALL · LINE 02

Door Line

2 carousel door foaming machines · 3 stations · 2 machines placed · 1 not available

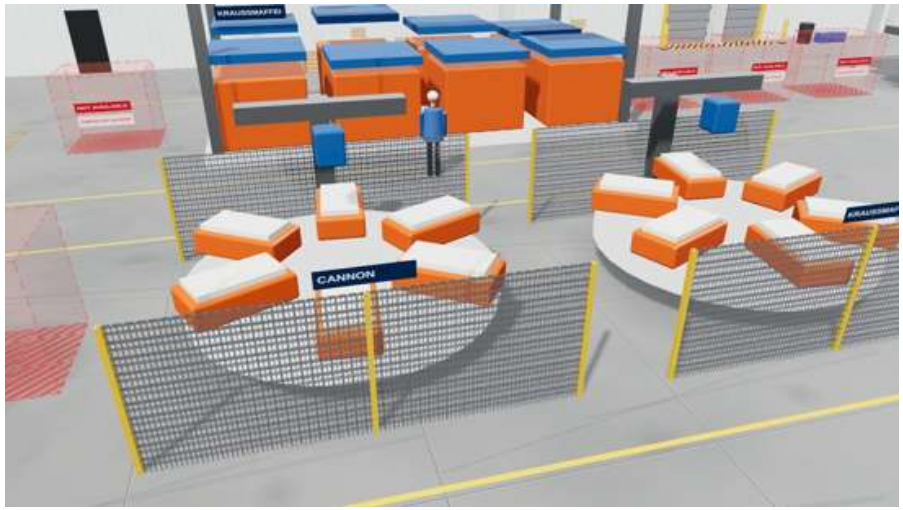

#	Station	Status	Machine / lot
01	**Door pre-assembly**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
02	**Door foaming (twin carousel)**	Machine placed	6022018 Cannon twin side-by-side door foaming machine (6-mould carousel) · 1999 · 400 V 50 Hz · Puromat 30 Fixture 2300 × 800 mm, closing height 160 mm, about 60 s cycle.
03	**Door foaming (carousel)**	Machine placed	6022020 KraussMaffei door foaming machine (6-mould carousel) · 2012 · 400 V 50 Hz Foaming pallet 2500 × 800 × 200 mm, about 60 s cycle, tooling racks (tooling not included).



Door foaming (twin carousel)



Door foaming (carousel)

REFRIGERATOR MANUFACTURING PLANT · FOAMING, ASSEMBLY & PACKING HALL · LINE 03

Packing Line 2

Second Thimon shrink-hood · 1 stations · 1 machines placed



#	Station	Status	Machine / lot
01	**Shrink-hood packing**	Machine placed	6022028 Thimon Coverpal 1250 shrink-hood packaging machine · 1999 · Natural-gas shrink hood Over 7 million cycles; product up to 600 × 600 × 2000 mm.



Shrink-hood packing

REFRIGERATOR MANUFACTURING PLANT · EQUIPMENT CATALOGUE

Category-wise machinery summary

Units follow the quantities stated in the plant catalogue. Each lot is listed with its catalogue sheet or photographs on the following pages.

Equipment category	Group	Lots	Units
Sheet-Metal Forming Lines	Plant equipment	4	4
Coil Cutting, Slitting & Punching	Plant equipment	3	3
Plastics Extrusion & Regrind	Plant equipment	2	2
Thermoforming Machines	Plant equipment	6	6
Laser Cutting Cell	Plant equipment	1	1
Foaming Plants	Plant equipment	3	3
Robot Workstation	Plant equipment	1	1
Powder Paint Shop	Plant equipment	5	5
Packaging Machines	Plant equipment	2	2
Evaporator Lines	Plant equipment	3	3
Workshop, Logistics & IT	Plant equipment	1	1
TOTAL		31	31

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Sheet-Metal Forming Lines — 4 lots · 4 units



MAS metal sheet forming line (fridge door panels)
Lot 6022001 · 2023
MAS Automazioni · 400 V 50 Hz · air 4.5–6 bar · 10 s cycle · 38.1 × 9.6 × 4.4 m · Laser-measured sheet loading, punching/bending station with 2 blade sets, 2 spare forming slots, 2nd punching station, 2 scrap conveyors, Siemens S7. 89,963 pieces made.
Used in: Door Panel Line A · Punching & bending



QS metal sheet forming line (top panels)
Lot 6022002 · 2004
QS Group · 400 V 50 Hz · 25 s cycle · coil 632 × 0.5 mm · 34.6 × 5.2 m · Coil-fed shearing, bending and punching stations R89, R109, R125, R145, R157, R189. Automatic changeover.
Used in: Top Panel Line · Coil decoiling; Top Panel Line · Shearing, bending & punching (R89–R189)



COSMA metal sheet forming line (side panels)
Lot 6022004 · 2018
Cosma, Vigevano · 400 V 50 Hz · 10 s per panel · 67.5 × 11.8 × 3.9 m · Sheet checking for size and weight, 6 bending/punching/cutting stations, automatic loading/unloading, 2 KUKA pick-and-place robots, fenced 67 m area.
Used in: Side Panel Line · Sheet check & loading; Side Panel Line · Punching, bending & cutting (6 stations); Side Panel Line · Robot unloading & stacking



TEAS metal sheet forming line (fridge door panels)
Lot 6022005 · 2010
TEAS · 400 V 50 Hz · 27 s cycle · 58.0 × 5.0 m · 12 stations for punching, long-side and short-side bending and mechanical insertion of fixings.
Used in: Door Panel Line B · Punching, bending & fixing insertion (12 stations)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Coil Cutting, Slitting & Punching — 3 lots · 3 units



Sacma cutting and slitting line
Lot 6022003 · 1975
Sacma, Vigevano · 400 V 50 Hz · decoiling up to 12 m/min · 23.5 × 4.8 m · Coil 300–1280 mm wide, max 12 t; sheet 450–3000 mm; 0.4–1.0 mm thick.
Used in: Door Panel Line A · Coil slitting & cut-to-length; Door Panel Line B · Coil slitting & cut-to-length



QS metal sheet cutting press (cut-to-length line)
Lot 6022006 · 2004
QS Group · 400 V 50 Hz · 20 m/min (max 30) · 16.5 × 8.0 m · Coil 500–900 mm wide, sheet up to 2100 mm, 0.4–0.6 mm. Changeover about 15 min.
Used in: Side Panel Line · Coil decoiling & cut-to-length



Konkoly punching machine
Lot 6022015 · 2020
Konkoly Electro · 400 V · 40 A · 6 bar · About 30 s cycle; 10–30 min changeover depending on tooling. 5,500 kg.
Used in: Door Panel Line B · Extra punching

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Plastics Extrusion & Regrind — 2 lots · 2 units



Battenfeld BEX-1-150-32-D-V / BEX 45-25E co-extrusion sheet line

Lot 6022008 · 1999

Battenfeld-cincinnati · 50 Hz · 6 bar · 1000–1200 kg/h · 2 feed silos, metal separators, main extruder 7 heating zones + vacuum zone, co-extruder 3 zones, 3 calenders, thickness gauge, corona treatment, automatic coil changing, edge slitting. Sheet 1–5 mm, up ...

Used in: Sheet Extrusion Line · Co-extrusion, calendering & winding



Rapid 500-120 granulator (1200 kg/h)

Lot 6022009 · 2003

Rapid Granulator · 37 kW · rotor Ø450 mm · Up to 1,200 kg/h (≈450–500 kg/h on liner scrap). 3-blade open rotor, 8 mm screen, 3,600 kg.

Used in: Sheet Extrusion Line · Granulate feeding & regrind

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Thermoforming Machines — 6 lots · 6 units



QS VF-20-08-02 roll-feed thermoforming machine (door liners)
Lot 6022007 · 2003
QS · 400 V 50 Hz · 280 kW · 465 A · 10 × 3 × 5 m · Roll unwind (max Ø1200, 570–850 mm wide), upper/lower heating 2 × 67.2 kW, forming, clamping ring, pre-stretch/cooling dome, 2 × 240 m³/h vacuum pumps. Workshop manuals.
Used in: Door Liner Line · Roll-fed thermoforming 1



COMI BL 2200x900x600 thermoforming machine (inner liners)
Lot 6022010 · 2013
COMI · 380 V 50 Hz · 269 kW · Forming 2200 × 900 mm, depth 600 mm, 3 loading stations, heating station, pressure + vacuum forming, 4 trimming presses (guillotine). 400 kN platen. 30 t.
Used in: Inner Liner Line · Thermoforming 1



COMI thermoforming machine (inner liners)
Lot 6022011 · 2007
COMI · 375 kW · Forming 2005 × 905 mm, depth 550 mm, 3 loading stations, 750 m³/h vacuum, 4 trimming presses. 35 t.
Used in: Inner Liner Line · Thermoforming 2



Illig UA 200/1g thermoforming machine (door liners)
Lot 6022012 · 1999
Adolf Illig · 3 × 380–400 V · ~105 kW · Forming 1960 × 960 mm, draw depth 600 mm, roll-fed (QS unwind Ø1200), ±0.2 mm indexing.
Used in: Door Liner Line · Roll-fed thermoforming 2



COMI SL200x90 NG DX thermoforming machine (inner liners)
Lot 6022013 · 1993
COMI / Rigo · 399 kW · Mould base 2000 × 900 mm, part height 550 mm, 570 m³/h vacuum, 4,000 L tanks. 25 t.
Used in: Inner Liner Line · Thermoforming 3



COMI HEDL 2000x800x200 thermoforming machine (door liners)
Lot 6022014 · 2014
COMI · 264 kW · Coil-fed 580–900 mm, frame 2004 × 804 mm, part height 150/200 mm, upper heating 168 kW, trimming press. 20 t.
Used in: Door Liner Line · Roll-fed thermoforming 3

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Laser Cutting Cell — 1 lots · 1 units



ELEN Blade RF 333 laser cutting cell on ABB robot (inner-liner punching)

Lot 6022016 · 2013

TEAS / ELEN / ABB · 400 V 50 Hz · 600 W laser · ABB robot with IRC5 controller (36,000 h), enclosure, turning table and air extraction. About 60 s cycle.

Used in: Inner Liner Line · Laser punching of liners

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Foaming Plants — 3 lots · 3 units



KraussMaffei cabinet foaming plant (8 fixtures)
Lot 6022017 · 2008
KraussMaffei Italia · Polyol/cyclopentane + isocyanate · 30.5 × 16 × 8 m · Dry system: 8 (2 × 4) fixtures, face-up foaming, cabinets on pallets. Wet system on mezzanine: 500 L tanks, pre-mixer, mixing heads 2,000 and 1,300 g/s, ATEX enclosure, mould storage fo...
Used in: Cabinet Line · Cabinet foaming



Cannon twin side-by-side door foaming machine (6-mould carousel)
Lot 6022018 · 1999
Cannon (renovated by TEAS) · 400 V 50 Hz · Puromat 30 · 5.2 × 4.2 m · Fixture 2300 × 800 mm, closing height 160 mm, about 60 s cycle.
Used in: Door Line · Door foaming (twin carousel)



KraussMaffei door foaming machine (6-mould carousel)
Lot 6022020 · 2012
KraussMaffei Italy · 400 V 50 Hz · 5.5 × 5.5 m · Foaming pallet 2500 × 800 × 200 mm, about 60 s cycle, tooling racks (tooling not included).
Used in: Door Line · Door foaming (carousel)

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Robot Workstation — 1 lots · 1 units



KUKA KR210 L180-2 vacuum insulation panel pressing workstation

Lot 6022021 · 2005

KUKA · Renewed and installed 2019, about 1 million cycles, table 2500 × 1000 mm, manual load/unload.

Used in: Insulation Panel Cell · Vacuum insulation panel pressing

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Powder Paint Shop — 5 lots · 5 units



Conveyor-fed industrial washing machine (pre-treatment)
Lot 6022022
1,200 kW hot-water burner · pumps 8 × 11 kW + 6 × 7 kW · 60 m + 60 m dryer · Ion-exchange washing tunnel and skid hot-air dryer in snake layout, 60 m each.
Used in: Powder Coating Line · Washing & drying (pre-treatment)



Wagner manual powder painting booth
Lot 6022023 · 2001
Wagner · 4 × 1.7 m · Twin operator platforms, doors both sides, stainless steel, 2 dedusting units. Not in use.
Used in: Powder Coating Line · Manual touch-up booth



Wagner automatic powder painting line
Lot 6022024 · 2001
Wagner · Wagner Itep control (2019) · 2 × 10-nozzle and 2 × 2-nozzle guns, 2 dedusters, paint recovery unit, Parker Hiross oil remover (2019).
Used in: Powder Coating Line · Automatic powder coating



Paint line drying oven (2 × 630 kW burners)
Lot 6022025
2 × 630 kW gas burners · 120 m incl. cooling · Curing oven with cooling zone, total length 120 m.
Used in: Powder Coating Line · Curing oven & cooling



Flex coop powder painting overhead conveyor (388 m)
Lot 6022026 · 2001
Flex coop · 400 V 50 Hz · 4 m/min · 388 m · 385 hanging points at 800 mm. Chain renewed 2019.
Used in: Powder Coating Line · Hanging & overhead conveyor

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Packaging Machines — 2 lots · 2 units



Thimon Coverpal 1250 shrink-hood packaging machine
Lot 6022027 · 1999
Thimon · Natural-gas shrink hood · 7.2 × 4.2 × 4.3 m · Over 7 million cycles; product up to 600 × 600 × 2000 mm.
Used in: Cabinet Line · Shrink-hood packing



Thimon Coverpal 1250 shrink-hood packaging machine
Lot 6022028 · 1999
Thimon · Natural-gas shrink hood · 7.2 × 4.2 × 4.3 m · Over 7 million cycles; product up to 600 × 600 × 2000 mm.
Used in: Packing Line 2 · Shrink-hood packing

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Evaporator Lines — 3 lots · 3 units



TEAS wrapped evaporator line
Lot 6022029 · 2013
TEAS · 80 kW · 400 V · 5.5–6 bar · 22 × 11 m · 396 pcs per shift. Freezer tape application, tube wrapping with aluminium tape and conductive paste. Al tube Ø7.5 × 0.75 mm.
Used in: Wrapped Evaporator Line · Freezer tape & tube wrapping



TEAS freezer compartment evaporator line
Lot 6022030 · 1999
TEAS · 5.5–6 bar · 10 × 9.5 m · About 400 pcs per shift, 67.5 s cycle. Al sheet 0.35 mm, Al tube Ø7.5 mm.
Used in: Freezer Evaporator Line · Compartment forming & tube taping (automatic)



Manual freezer compartment evaporator line (combi fridges)
Lot 6022031
Station 1 compartment forming, station 2 tube bending and taping, station 3 tube diameter reduction.
Used in: Freezer Evaporator Line · Compartment forming, tube bending & reduction (manual)

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Workshop, Logistics & IT — 1 lots · 1 units

Workshop, logistics and IT equipment (partner online auctions)
Lot 60200000
Separate online auctions run by the partner auction house: measuring instruments, workshop, logistics, spare parts and IT.
Used in: Support · Workshop, logistics & IT

NOT AVAILABLE

Stations to source separately

Plant	Hall	Station	Qty	Lines
Refrigerator Plant	Metal Forming Hall	**Door panel stacking robot**	1	Door Panel Line A
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Cabinet pre-assembly (liner into outer cabinet)**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Final assembly (compressor, piping)**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Refrigerant charging & leak test**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Functional & electrical test**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Door pre-assembly**	1	Door Line

6 stations have no machine in the listings. In the refrigerator plant the listing has no cabinet pre-assembly, final assembly, refrigerant charging or end-of-line test equipment.