COMPLETE MACHINERY & PRODUCTION LINE BROCHURE

Three Production Plants

Every machine of the plant grouped into halls, equipment categories and complete process lines. Each station shows the machine placed from the listing with its original photograph, or NOT AVAILABLE where the listing has nothing.



Electronics & Display Plant
Slovakia · Display electronics · SMT · molding
12 halls · 40 lines · 272 stations · 527 lots · 1556 photographs · 42 not available



Refrigerator Manufacturing Plant
Jászberény, Hungary · Domestic refrigerators · ~440,000 a year
5 halls · 14 lines · 40 stations · 31 lots · 90 photographs · 6 not available



Automotive Press Hardening Plant
Luleå, Sweden · Hot stamping · body-in-white parts
1 hall · 4 lines · 28 stations · 31 lots · 93 photographs · 0 not available

CONTENTS

What is in this brochure

1	Electronics & Display Plant	Plant overview and site plan, 12 halls with 40 production lines and areas, one page per line with its 3D view, machines and photographs
2	Refrigerator Manufacturing Plant	Plant overview and site plan, 5 halls with 14 production lines and areas, one page per line with its 3D view, machines and photographs
3	Automotive Press Hardening Plant	Plant overview and site plan, 1 halls with 4 production lines and areas, one page per line with its 3D view, machines and photographs
4	Equipment catalogue by category	Category-wise machinery summary and every lot with its catalogue sheet or photographs
5	Not available	Stations with no machine in the listings, to be sourced separately

Station key

- Machine placed
- Alternate machine
- With press / line
- Suggested reuse
- Shared
- NOT AVAILABLE

SLOVAKIA · DISPLAY ELECTRONICS · SMT · MOLDING

Electronics & Display Plant

A complete consumer-display electronics plant. All 527 lots of the equipment catalogue are grouped into 12 halls and 40 production lines and areas. The SMT, PCB handling, inspection, reflow, programming, rework, depaneling and LED encapsulation equipment is also listed in the 10 equipment categories of the plant catalogue.

12	40	272	225	527	597	1556	42
Halls	Lines & areas	Stations	Machines placed	Catalogue lots	Units	Photographs	Not available








Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SITE PLAN

Plant layout

Every hall as a plan view from its 3D model, with the number of lines and the approximate footprint. Halls are arranged for overview and are not to scale between each other.

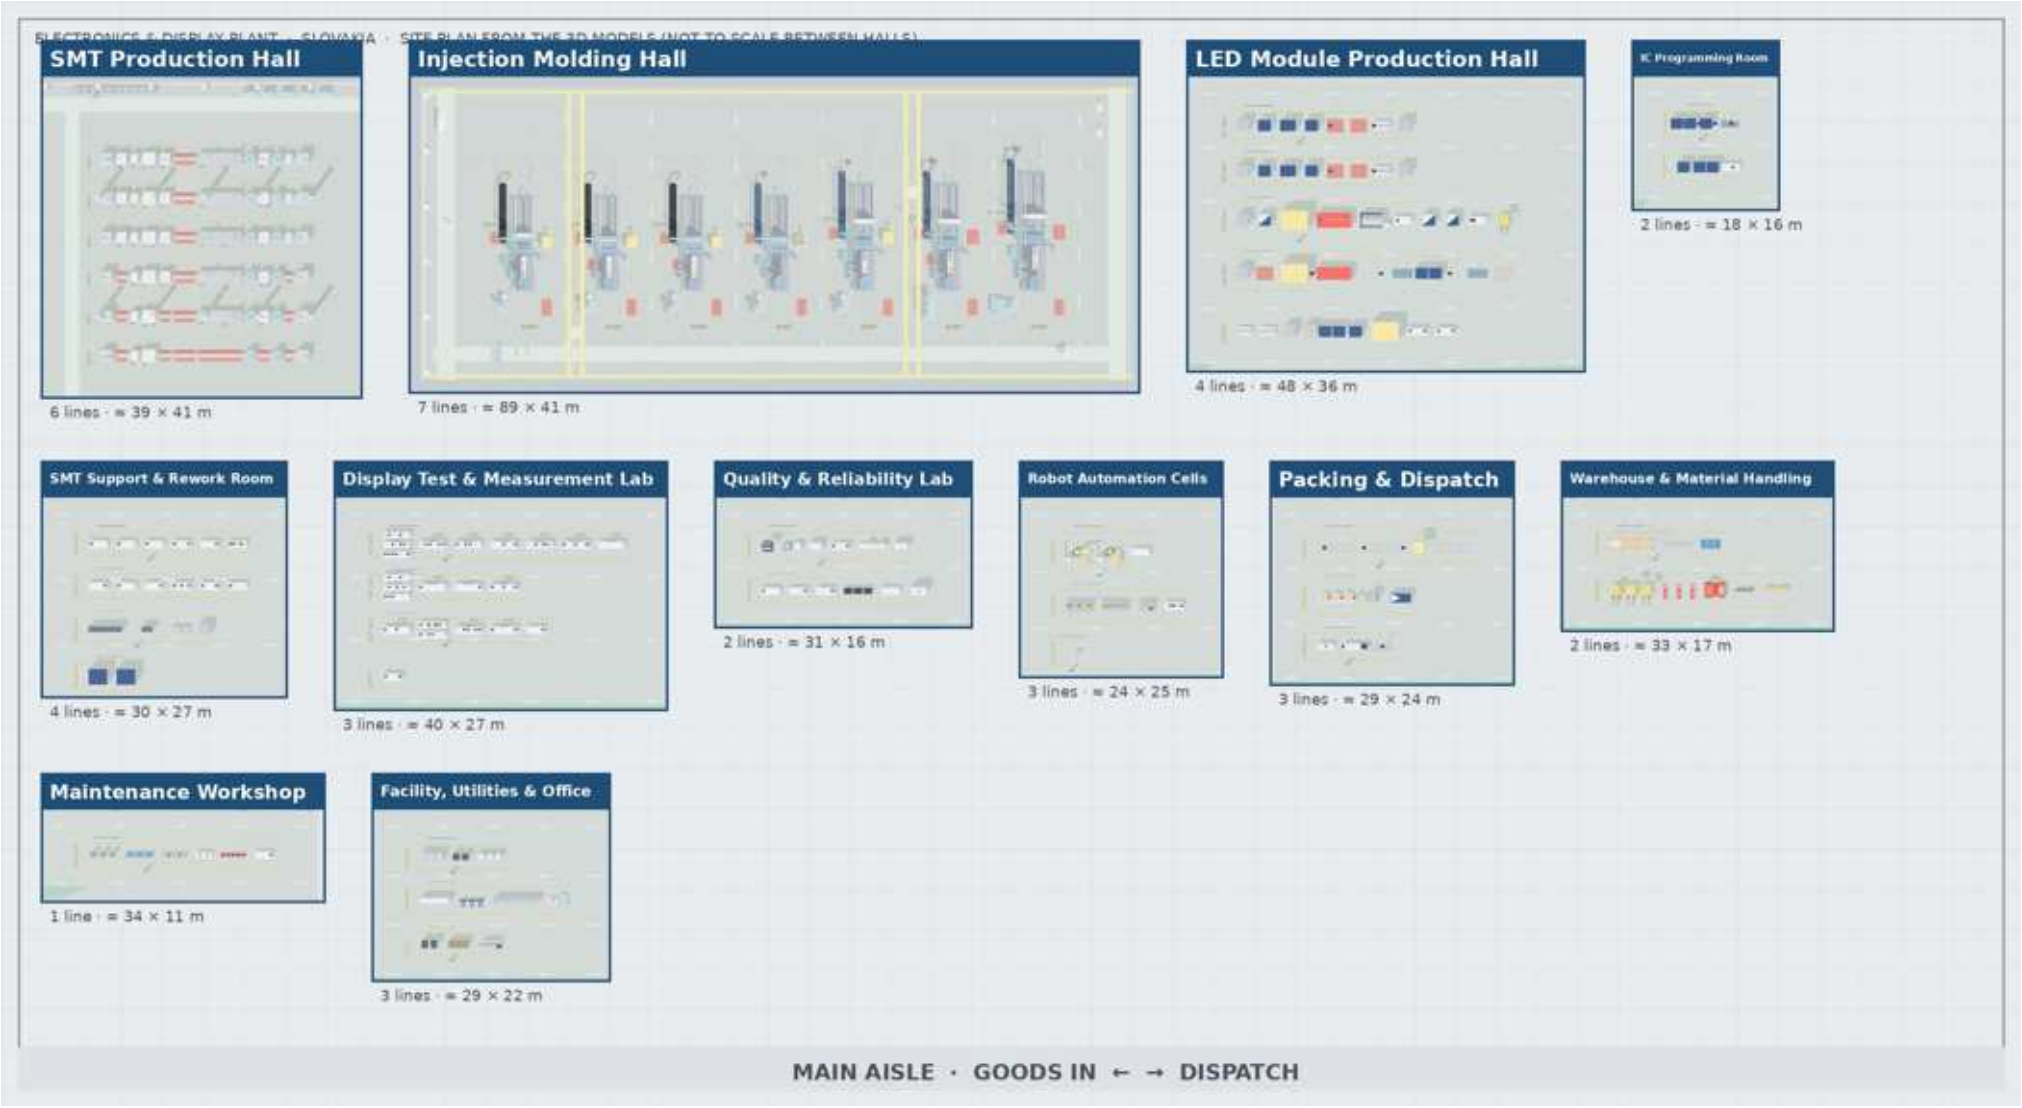

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · HALLS

Halls and departments

Hall / department	Lines / areas	Stations	Not available	What it covers
SMT Production Hall	6	72	16	Six surface-mount lines from loader to unloader
Injection Molding Hall	7	70	20	Seven injection molding cells with dryers, robots and conveyors
LED Module Production Hall	4	36	6	LED module ("The Wall") repair, molding and test lines
IC Programming Room	2	6	0	Automated device programming handlers and programmers
SMT Support & Rework Room	4	18	0	Rework stations, paste and stencil prep, MSD storage, depaneling
Display Test & Measurement Lab	3	16	0	Signal, color, safety and power test equipment for TV/display production
Quality & Reliability Lab	2	12	0	Reliability, materials analysis and metrology
Robot Automation Cells	3	8	0	Robots not used in the molding lines, set up as automation cells
Packing & Dispatch	3	10	0	Conveying, lifting, wrapping, strapping, labeling and weighing
Warehouse & Material Handling	2	8	0	Forklift fleet, pallet trucks, racking and yard equipment
Maintenance Workshop	1	6	0	Machining, sawing, welding and compressed air
Facility, Utilities & Office	3	10	0	Power, gases, cleanroom, lockers, IT and AV

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · HALL

SMT Production Hall

Six SMT lines: board loading, laser marking, cleaning, paste printing, SPI, mounting, reflow, AOI and unloading.



Plan view from the 3D model

Line	Process	Stations	Not available
SMT Line 1	12-step SMT line	12	1
SMT Line 2	12-step SMT line	12	1
SMT Line 3	12-step SMT line	12	1
SMT Line 4	12-step SMT line	12	3
SMT Line 5	12-step SMT line	12	4
SMT Line 6	12-step SMT line	12	6
Support	10 × KI HEUNG KCC-600SC connection conveyors (8060004, 8060019, 8060027, 8060028, 8060041, 8060042, 8060077, 8060088, 8060093, 8060096); 8 × KI HEUNG KGC gateway conveyors (8060006, 8060007, 8060008, 8060009, 8060010, 8060011, 8060045, 8060126); Shuttle conveyors (KSC-6000SC, KDSC-500SC, Samsung FSC-400AS) (8060022, 8060070, 8060079, 8060115, 8060130, 8060131); Dual connecting conveyors, 2 Morel d	6	



ELECTRONICS & DISPLAY PLANT · SMT PRODUCTION HALL


SMT Production Hall — 12 process steps

Step	Station	What happens
01	**PCB Loading**	Magazine or vacuum loader feeds bare boards onto the line conveyor one at a time.
02	**Laser Marking**	Laser engraves a serial number or 2D code on each board for traceability.
03	**PCB Cleaning**	Removes particles from the board (a plasma cleaner also activates the surface) before printing.
04	**Solder Paste Printing**	Stencil printer squeegees solder paste onto the pads.
05	**Solder Paste Inspection (SPI)**	3D inspection measures paste volume, height and position on every pad.
06	**Component Placement (Pick & Place)**	Pick-and-place mounters set components onto the paste.
07	**Reflow Soldering**	The oven melts the paste through a temperature profile to form solder joints.
08	**Post-Reflow Cooling**	Cooling buffer brings boards down to handling temperature before inspection.
09	**Automated Optical Inspection (AOI)**	Cameras check component presence, polarity and solder joints.
10	**Good / NG Sorting**	Buffer separates failed boards for rework.
11	**Board Flip (Double-Sided)**	Inverts the board so the second side can be printed and placed.
12	**PCB Unloading**	Stacks finished boards back into magazines.

ELECTRONICS & DISPLAY PLANT · SMT PRODUCTION HALL · LINE 01

SMT Line 1

12-step SMT line · 12 stations · 11 machines placed · 1 not available

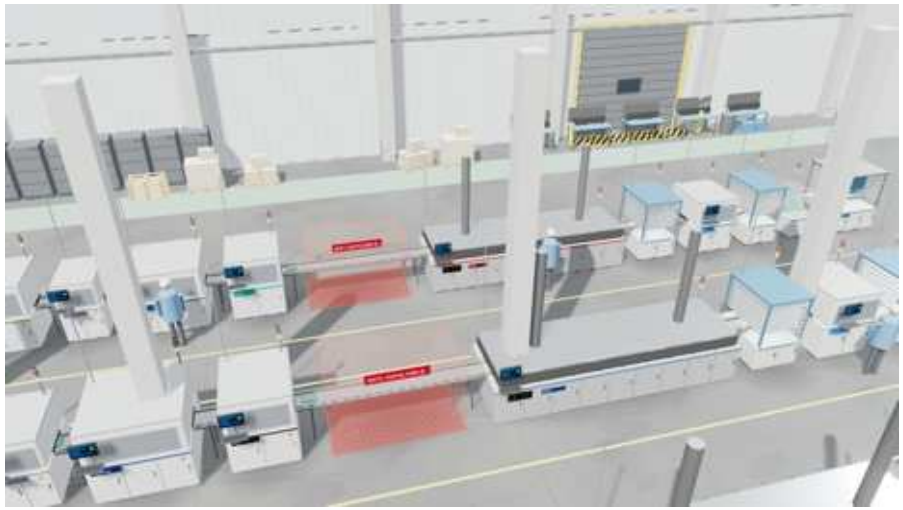

#	Station	Status	Machine / lot
01	**PCB Loading**	Machine placed	PH-10 KI HEUNG FA KVL-900SC · 2022 · 220 VAC
02	**Laser Marking**	Machine placed	MC-01 STS LM-1300G · 220 VAC
03	**PCB Cleaning**	Machine placed	MC-02 GSI F077-02 · 2022 · 208 VAC
04	**Solder Paste Printing**	Machine placed	SP-01 ITW EAE (MPM) MOMENTUM II BTB · 2022 · 200-240 V
05	**Solder Paste Inspection (SPI)**	Machine placed	IN-06 PARMI SPI HS60 · 2009 · 220 V
06	**Component Placement (Pick & Place)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Reflow Soldering**	Machine placed	RF-07 TSM I-E123S-R · 2021 · 380 V
08	**Post-Reflow Cooling**	Machine placed	PH-43 KI HEUNG FA KCBB-900SC · 2022 · 220 VAC
09	**Automated Optical Inspection (AOI)**	Machine placed	IN-04 MIRTEC MV-8VDH · 2010 · 208 V
10	**Good / NG Sorting**	Machine placed	PH-09 KI HEUNG FA KGNB-900SC · 2022 · 220 VAC
11	**Board Flip (Double-Sided)**	Machine placed	PH-50 KI HEUNG FA KIV-420C · 2025 · 220 VAC
12	**PCB Unloading**	Machine placed	PH-17 KI HEUNG FA KFU-900SC · 2022 · 220 VAC



PCB Loading



Laser Marking



PCB Cleaning



Solder Paste Printing



Solder Paste Inspection (SPI)




Reflow Soldering

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT PRODUCTION HALL · LINE 02

SMT Line 2

12-step SMT line · 12 stations · 11 machines placed · 1 not available

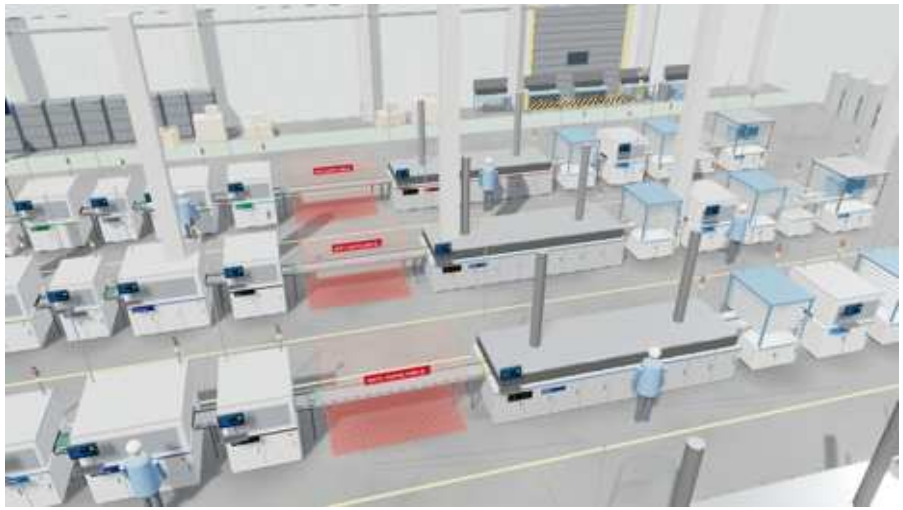

#	Station	Status	Machine / lot
01	**PCB Loading**	Machine placed	PH-16 KI HEUNG FA KFL-900SC · 2022 · 220 VAC
02	**Laser Marking**	Machine placed	MC-04 STS LM-1300G · 220 VAC
03	**PCB Cleaning**	Machine placed	MC-05 GSI F077-02 · 2022 · 208 VAC
04	**Solder Paste Printing**	Machine placed	SP-09 Samsung Techwin SPI-C · 2014 · 220/240 VAC
05	**Solder Paste Inspection (SPI)**	Machine placed	IN-01 Koh Young Meister-SV · 220 VAC
06	**Component Placement (Pick & Place)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Reflow Soldering**	Machine placed	RF-03 Heller 1910 DCO · 2012 · 400 V
08	**Post-Reflow Cooling**	Machine placed	PH-48 KI HEUNG FA KCBB-900SC · 2022 · 220 VAC
09	**Automated Optical Inspection (AOI)**	Machine placed	IN-07 MIRTEC MV-8VH · 2010 · 208 V
10	**Good / NG Sorting**	Machine placed	PH-12 KI HEUNG FA KGNB-900SC · 2022 · 220 VAC
11	**Board Flip (Double-Sided)**	Machine placed	PH-29 KI HEUNG FA KIV-420SA · 2022 · 220 VAC
12	**PCB Unloading**	Machine placed	PH-21 KI HEUNG FA KFU-900SC · 2022 · 220 VAC



PCB Loading



Laser Marking



PCB Cleaning



Solder Paste Printing



Solder Paste Inspection (SPI)




Reflow Soldering

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT PRODUCTION HALL · LINE 03

SMT Line 3

12-step SMT line · 12 stations · 11 machines placed · 1 not available

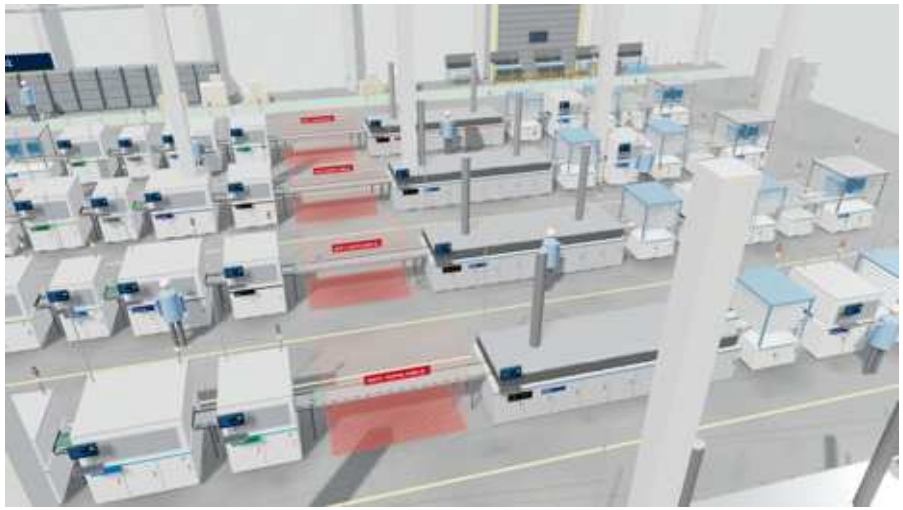

#	Station	Status	Machine / lot
01	**PCB Loading**	Machine placed	PH-20 KI HEUNG FA KVL-900SC · 2022 · 220 VAC
02	**Laser Marking**	Machine placed	MC-12 STS LM-1300G · 220 VAC
03	**PCB Cleaning**	Machine placed	MC-07 KI HEUNG FA KIPC-900SC · 2022 · 220 VAC
04	**Solder Paste Printing**	Machine placed	SP-12 Samsung Techwin SPI-C · 2014 · 220/240 VAC
05	**Solder Paste Inspection (SPI)**	Machine placed	IN-02 Koh Young Meister-SV · 220 VAC
06	**Component Placement (Pick & Place)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Reflow Soldering**	Machine placed	RF-04 Heller 1910 DCO · 2012 · 400 V
08	**Post-Reflow Cooling**	Machine placed	PH-49 KI HEUNG FA KCBB-900SC · 2022 · 220 VAC
09	**Automated Optical Inspection (AOI)**	Machine placed	IN-08 MIRTEC MV-8VDH · 2010 · 208 V
10	**Good / NG Sorting**	Machine placed	PH-76 KI HEUNG FA KGNB-900SC · 2022 · 220 VAC
11	**Board Flip (Double-Sided)**	Machine placed	PH-54 KI HEUNG FA KIV-420SA · 2022 · 220 VAC
12	**PCB Unloading**	Machine placed	PH-23 KI HEUNG FA KFU-900SC · 2022 · 220 VAC



PCB Loading



Laser Marking



PCB Cleaning



Solder Paste Printing



Solder Paste Inspection (SPI)




Reflow Soldering

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT PRODUCTION HALL · LINE 04

SMT Line 4

12-step SMT line · 12 stations · 9 machines placed · 3 not available

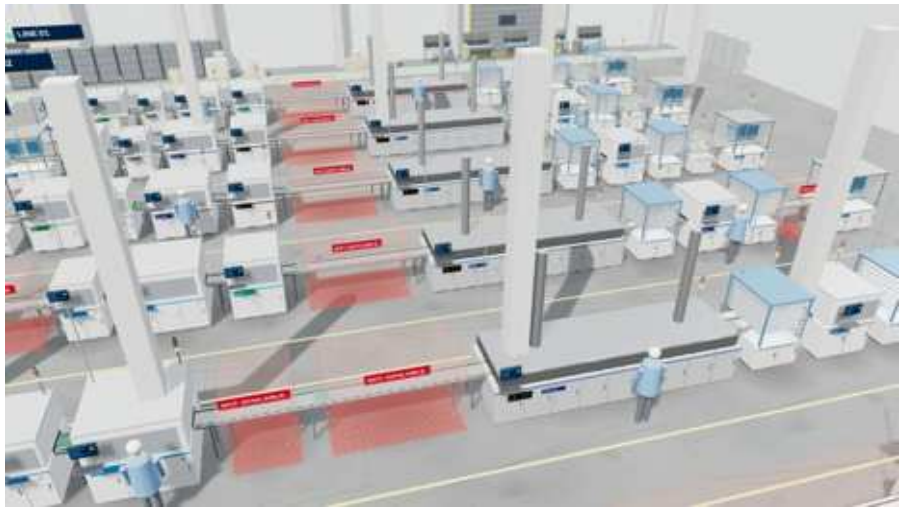

#	Station	Status	Machine / lot
01	**PCB Loading**	Machine placed	PH-26 KI HEUNG FA KFL-900SC · 2022 · 220 VAC
02	**Laser Marking**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
03	**PCB Cleaning**	Alternate machine	8060003 MAK MAK-SFNP-09 plasma cleaner · 2025 · 3~380 V Plasma cleaner placed in the cleaning bay instead of a particle cleaner. It cleans and activates the board surface before printing.
04	**Solder Paste Printing**	Machine placed	SP-10 EKRA X5-Prof · 2012 · 400 V
05	**Solder Paste Inspection (SPI)**	Machine placed	IN-03 PARMI SPI HS60 · 220 V
06	**Component Placement (Pick & Place)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Reflow Soldering**	Machine placed	RF-05 Heller 1910 MK III · 2010
08	**Post-Reflow Cooling**	Machine placed	PH-59 KI HEUNG FA KDCBB-900SC · 2022 · 220 VAC
09	**Automated Optical Inspection (AOI)**	Machine placed	IN-05 Samsung MV-8VH
10	**Good / NG Sorting**	Machine placed	PH-79 KI HEUNG FA KGNB-900SC · 2022 · 220 VAC
11	**Board Flip (Double-Sided)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
12	**PCB Unloading**	Machine placed	PH-24 KI HEUNG FA KFU-900SC · 2022 · 220 VAC



PCB Loading



PCB Cleaning



Solder Paste Printing



Solder Paste Inspection (SPI)



Reflow Soldering




Post-Reflow Cooling

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT PRODUCTION HALL · LINE 05

SMT Line 5

12-step SMT line · 12 stations · 8 machines placed · 4 not available

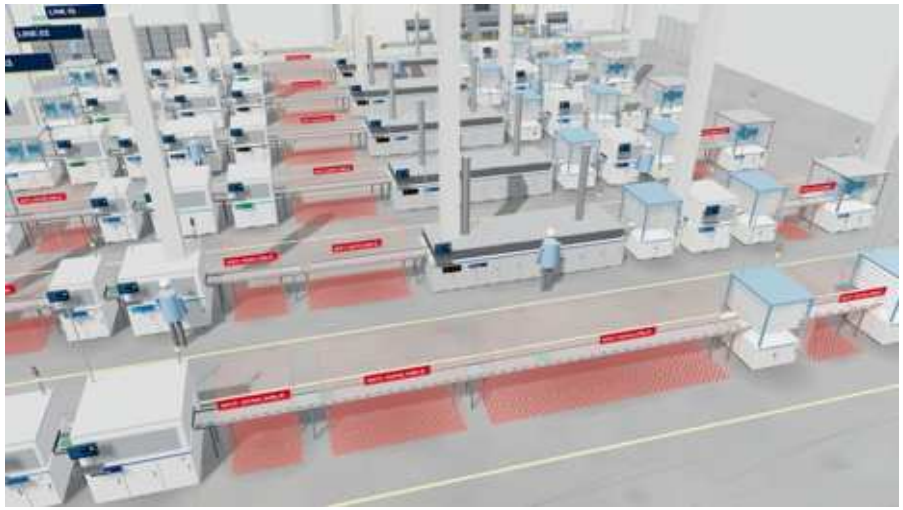

#	Station	Status	Machine / lot
01	**PCB Loading**	Machine placed	PH-27 KI HEUNG FA KFL-900SC · 2022 · 220 VAC
02	**Laser Marking**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
03	**PCB Cleaning**	Alternate machine	8060017 MAK MAK-SFNP-09 plasma machine · 2025 · 3~380 V Plasma cleaner placed in the cleaning bay instead of a particle cleaner. It cleans and activates the board surface before printing.
04	**Solder Paste Printing**	Machine placed	SP-11 EKRA X5-Prof · 2012 · 400 V
05	**Solder Paste Inspection (SPI)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
06	**Component Placement (Pick & Place)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Reflow Soldering**	Machine placed	RF-06 Samsung Techwin RF30103
08	**Post-Reflow Cooling**	Machine placed	PH-71 KI HEUNG FA KDHC-1800SC · 2022 · 220 VAC
09	**Automated Optical Inspection (AOI)**	Alternate machine	8060158 In-line inspection & test station In-line inspection and test station for electronic modules, placed in the AOI bay. Check that it can inspect solder joints before relying on it as an AOI.
10	**Good / NG Sorting**	Machine placed	PH-34 KI HEUNG FA KGNB-900S · 220 V
11	**Board Flip (Double-Sided)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
12	**PCB Unloading**	Machine placed	PH-25 KI HEUNG FA KFU-900SC · 2022 · 220 VAC



PCB Loading



PCB Cleaning



Solder Paste Printing



Reflow Soldering



Post-Reflow Cooling




Automated Optical Inspection (AOI)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT PRODUCTION HALL · LINE 06

SMT Line 6

12-step SMT line · 12 stations · 6 machines placed · 6 not available

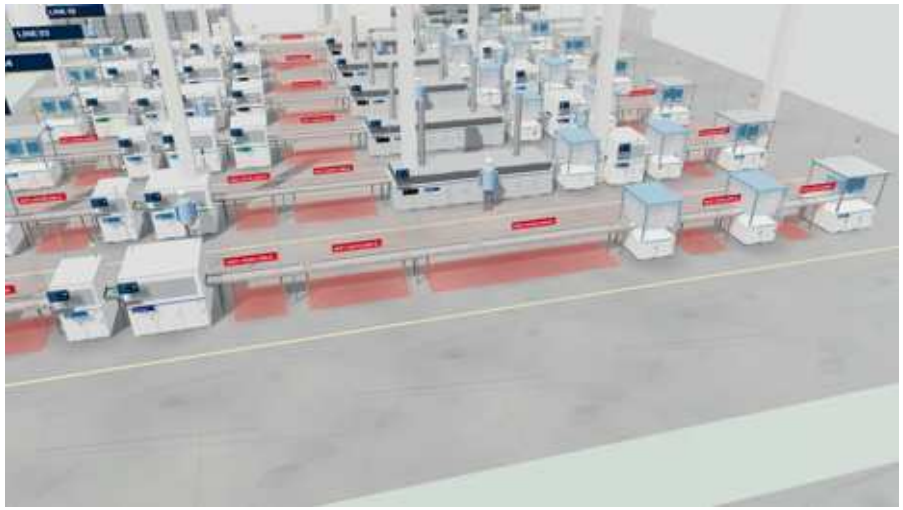

#	Station	Status	Machine / lot
01	**PCB Loading**	Machine placed	PH-28 KI HEUNG FA KFL-900SC · 2022 · 220 VAC
02	**Laser Marking**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
03	**PCB Cleaning**	Alternate machine	8060168 MAK MAK-SFNP-06 N2 plasma machine · 2022 Plasma cleaner placed in the cleaning bay instead of a particle cleaner. It cleans and activates the board surface before printing.
04	**Solder Paste Printing**	Machine placed	SP-08 Samsung Techwin SP1 · 220/240 VAC
05	**Solder Paste Inspection (SPI)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
06	**Component Placement (Pick & Place)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Reflow Soldering**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
08	**Post-Reflow Cooling**	Machine placed	PH-75 KI HEUNG FA KHC-1800SC · 2022 · 220 VAC
09	**Automated Optical Inspection (AOI)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
10	**Good / NG Sorting**	Machine placed	PH-72 Famecs FRNB-750SA-8E-SV · 220 VAC
11	**Board Flip (Double-Sided)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
12	**PCB Unloading**	Machine placed	PH-44 KI HEUNG FA KFU-900SC · 2022 · 220 VAC



PCB Loading



PCB Cleaning



Solder Paste Printing



Post-Reflow Cooling



Good / NG Sorting




PCB Unloading

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · HALL

Injection Molding Hall

Seven molding cells: resin drying and loading, mold temperature control, press, quick mold change, take-out robot, conveyor and stacking.

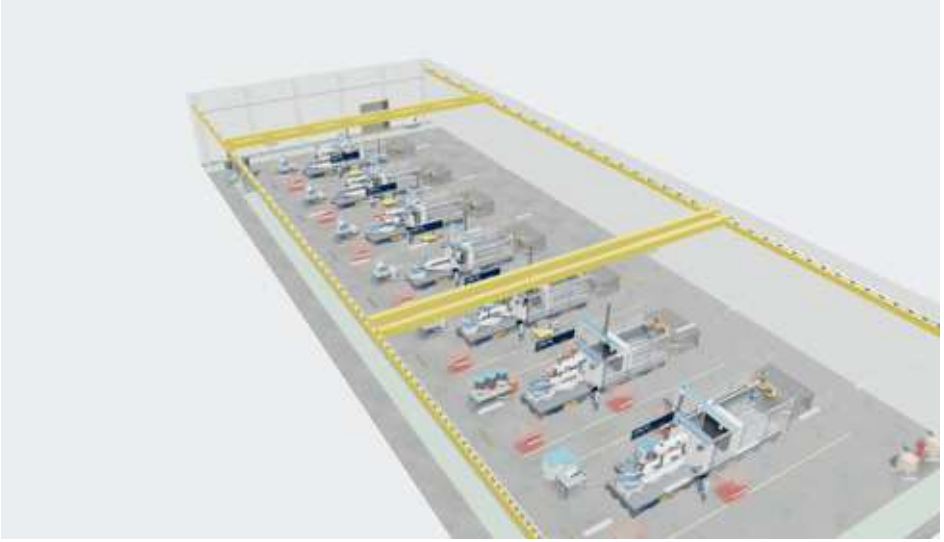

Plan view from the 3D model

Line	Process	Stations	Not available
IMM Line 1	ENGEL DUO 11050H/7050M/1700 Combi 1,700 t	10	2
IMM Line 2	ENGEL DUO 11050H/7050M/1700 Combi 1,700 t	10	3
IMM Line 3	ENGEL DUO 11050H/7050M/1700 Combi 1,700 t	10	4
IMM Line 4	ENGEL DUO 11050H/7050M/1700 1,700 t	10	2
IMM Line 5	ENGEL DUO 23050H/11050M/2300 Combi 2,300 t	10	2
IMM Line 6	ENGEL DUO 2300 2F CLS 2,300 t	10	4
IMM Line 7	ENGEL DUO 23050H/11050M/3200 3,200 t	10	3
Support	Storage hopper, 3 compartments (C1–C3) (8060257); Moretto FC40CPB filter unit (8060265); Moretto filter unit (8060266); Shini resin dryer (8060264); Mettler Toledo HB43-S moisture analyzer · Creaform HandySCAN 700 (8060291 · 8060276)	5	



ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL

Injection Molding Hall — 10 process steps

Step	Station	What happens
S01	**Resin drying**	Hot dry air pulls moisture out of the resin pellets in an insulated hopper, so hygroscopic grades (ABS, PC, PC/ABS) do not splay or go brittle in the part.
S02	**Material loading**	A vacuum hopper loader on the feed throat draws dried pellets through a hose from the dryer and keeps the barrel throat topped up.
S03	**Mold temperature control**	Mold temperature controllers circulate water through the mold halves at a set temperature, which sets gloss, shrinkage and cycle time.
S04	**Process cooling (chiller)**	A chiller or cooling tower supplies cold water to the hydraulic oil cooler, the feed throat and the controllers. A two-platen press of this size cannot run without it.
S05	**Injection molding**	The screw melts and injects the resin; the two-platen clamp holds the mold shut at full tonnage while the part cools. Combi machines add a second injection unit and a turning platen for two-shot parts.
S06	**Quick mold change**	Magnetic or hydraulic platen clamping plus a mold cart, so a mold can be swapped in minutes instead of hours with bolts and a crane.
S07	**Part take-out robot**	A Yudo servo gantry robot on the fixed platen reaches into the open mold, grips the part and sprue, and sets the part on the conveyor.
S08	**Part conveyor**	A belt conveyor carries parts out of the guarding, cooling them on the way to the next operation.
S09	**Stacking / palletizing robot**	A 6-axis robot at the end of the conveyor stacks finished parts on a pallet or dunnage tray for packing.
S10	**Sprue regrind (granulator)**	A beside-the-press granulator grinds sprues and rejects so the regrind can be fed back with virgin material.

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL · LINE 01

IMM Line 1

ENGEL DUO 11050H/7050M/1700 Combi 1,700 t · 10 stations · 8 machines placed · 2 not available



#	Station	Status	Machine / lot
01	**Resin drying**	Machine placed	8060258 Shini SHD-1500U-SL-CE hopper dryer · 2018 · 35 kW · 3~400 V Supplied with SHD-U control cabinet, blower on mobile frame, steel support frame with platform and ladder.
02	**Material loading**	With press / line	8060250 2 × hopper loaders Two loaders ship with the press, one per injection unit.
03	**Mold temperature control**	With press / line	8060250 Yudo mold temperature controllers Ship with the press lot; quantity not stated.
04	**Process cooling (chiller)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Injection molding**	Machine placed	8060250 ENGEL DUO 11050H/7050M/1700 Combi · 2009 · 3~400 V Two injection units, turning platen. Hydraulic oil 3,000 l ISO VG 46 HLP.
06	**Quick mold change**	With press / line	8060250 QMC quick mold change control box Ships with the press lot.
07	**Part take-out robot**	With press / line	8060250 Yudo-Star robot + YUCON-400 control Handling robot ships with the press lot.
08	**Part conveyor**	Machine placed	8060220 Belt conveyor (1 of 3 in lot) Rubber belt on tubular frame, approx. 1650 × 1100 × 900 mm, e-stop and isolator. Unit 1 of 3 sold together.
09	**Stacking / palletizing robot**	Suggested reuse	8060375 KUKA KR 50 R2500 / SEL · 2025 · 3×400 V · KR C4 Payload 50 kg, reach 2501 mm, comes with a Schmalz vacuum gripper. From the assembly area, not the molding shop: needs a gripper, safety fence and a hand-off signal from the press.
10	**Sprue regrind (granulator)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing



Material loading

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL · LINE 02

IMM Line 2

ENGEL DUO 11050H/7050M/1700 Combi 1,700 t · 10 stations · 7 machines placed · 3 not available



#	Station	Status	Machine / lot
01	**Resin drying**	Machine placed	8060259 Shini SHD-1500U-SL-CE hopper dryer · 2018 · 35 kW · 3~400 V Supplied with support frame, platform, cage ladder, OuGuan blower, control box and a material loader.
02	**Material loading**	With press / line	8060259 Material loader (ships with dryer lot) Single loader: the press has two injection units, so the second unit needs one more loader.
03	**Mold temperature control**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
04	**Process cooling (chiller)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Injection molding**	Machine placed	8060251 ENGEL DUO 11050H/7050M/1700 Combi · 2009 · 3~400 V Two injection units, moving, turning and stationary platens, ENGEL access card control panel.
06	**Quick mold change**	With press / line	8060251 Solutech C&C; QMC system Ships with the press lot.
07	**Part take-out robot**	With press / line	8060251 Yudo-Star MEGA-2000-2P + YUCON-400 Take-out robot ships with the press lot.
08	**Part conveyor**	Machine placed	8060220 Belt conveyor (1 of 3 in lot) Rubber belt on tubular frame, approx. 1650 × 1100 × 900 mm, e-stop and isolator. Unit 2 of 3 sold together.
09	**Stacking / palletizing robot**	Suggested reuse	8060350 KUKA KR 60-3 · 2018 · 3×400 V · KR C4 Payload 60 kg, reach approx. 2033 mm. From the assembly area, not the molding shop: needs a gripper, safety fence and a hand-off signal from the press.
10	**Sprue regrind (granulator)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL · LINE 03

IMM Line 3

ENGEL DUO 11050H/7050M/1700 Combi 1,700 t · 10 stations · 6 machines placed · 4 not available



#	Station	Status	Machine / lot
01	**Resin drying**	Machine placed	8060260 Shini SHD-1500U-SL-CE hopper dryer · 2018 · 35 kW · 3~400 V Supplied with SHD-U controller, blower (JZ100L-2) on trolley and steel support frame.
02	**Material loading**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
03	**Mold temperature control**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
04	**Process cooling (chiller)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Injection molding**	Machine placed	8060254 ENGEL DUO 11050H/7050M/1700 Combi · 2008 · 3~400 V Two injection units (Agg. 1 and Agg. 2). Hydraulic oil 3,000 l ISO VG 46 HLP.
06	**Quick mold change**	With press / line	8060254 Solutech C&C; QMC system Ships with the press lot.
07	**Part take-out robot**	With press / line	8060254 Yudo-Star MEGA-2000-2P + Yudo control cabinets Take-out robot ships with the press lot.
08	**Part conveyor**	Machine placed	8060220 Belt conveyor (1 of 3 in lot) Rubber belt on tubular frame, approx. 1650 × 1100 × 900 mm, e-stop and isolator. Unit 3 of 3 sold together.
09	**Stacking / palletizing robot**	Suggested reuse	8060351 KUKA KR 60-3 · 2018 · 3×400 V · KR C4 Payload 60 kg, reach approx. 2033 mm. From the assembly area, not the molding shop: needs a gripper, safety fence and a hand-off signal from the press.
10	**Sprue regrind (granulator)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing

ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL · LINE 04

IMM Line 4

ENGEL DUO 11050H/7050M/1700 1,700 t · 10 stations · 8 machines placed · 2 not available



#	Station	Status	Machine / lot
01	**Resin drying**	Machine placed	8060262 Shini resin dryer · 2015 · 31.2 kW · 3~400 V Schneider Magelis touch panel, drying hopper and steel stand, approx. 174 × 126 × 261 cm.
02	**Material loading**	With press / line	8060255 Yudo material hopper loader Ships with the press lot.
03	**Mold temperature control**	With press / line	8060255 Temperature controllers Ship with the press lot; make and quantity not stated.
04	**Process cooling (chiller)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Injection molding**	Machine placed	8060255 ENGEL DUO 11050H/7050M/1700 · 2008 · 3/PEN AC 400/230 V, 50 Hz Single-material press (no Combi turning platen). Hydraulic oil 3,000 l ISO VG 46.
06	**Quick mold change**	With press / line	8060255 Solutech C&C; QMC system Ships with the press lot.
07	**Part take-out robot**	With press / line	8060255 Yudo MEGA-2000-2P take-out robot Ships with the press lot.
08	**Part conveyor**	Machine placed	8060224 Foam belt conveyor (1 of 5 in lot) Aluminium frame, approx. 1150 × 1700 × 930 mm, 400 mm foam belt (gentle on cosmetic surfaces). Unit 1 of 5 sold together.
09	**Stacking / palletizing robot**	Suggested reuse	8060348 KUKA KR 30-3 · 2017 · 3×400 V · KR C4 Payload 30 kg, reach 2033 mm, with energy supply hose package. From the assembly area, not the molding shop: needs a gripper, safety fence and a hand-off signal from the press.
10	**Sprue regrind (granulator)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL · LINE 05

IMM Line 5

ENGEL DUO 23050H/11050M/2300 Combi 2,300 t · 10 stations · 8 machines placed · 2 not available




#	Station	Status	Machine / lot
01	**Resin drying**	Machine placed	8060263 Shini resin dryer · 2016 · 31.2 kW · 3~400 V Schneider Harmony touch screen panel.
02	**Material loading**	With press / line	8060252 Material hoppers Ship with the press lot.
03	**Mold temperature control**	With press / line	8060252 Yudo and Yudo-Suns mold temperature controllers Ship with the press lot.
04	**Process cooling (chiller)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Injection molding**	Machine placed	8060252 ENGEL DUO 23050H/11050M/2300 Combi · 2009 · 3~400 V Two injection units, access card operator panel and quick mold change panel.
06	**Quick mold change**	With press / line	8060252 Quick mold change panel On the press; mold cart not listed.
07	**Part take-out robot**	With press / line	8060252 YUDO-STAR MEGA-2500-2P + YUCON-400 + YUCON-500 pendant Take-out robot ships with the press lot.
08	**Part conveyor**	Machine placed	8060224 Foam belt conveyor (1 of 5 in lot) Aluminium frame, approx. 1150 × 1700 × 930 mm, 400 mm foam belt (gentle on cosmetic surfaces). Unit 2 of 5 sold together.
09	**Stacking / palletizing robot**	Suggested reuse	8060345 KUKA KR 16 R2010-2 / SEL · 2025 · 3×400 V · KR C4 Payload 16 kg, reach approx. 2013 mm. From the assembly area, not the molding shop: needs a gripper, safety fence and a hand-off signal from the press.
10	**Sprue regrind (granulator)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL · LINE 06

IMM Line 6

ENGEL DUO 2300 2F CLS 2,300 t · 10 stations · 6 machines placed · 4 not available

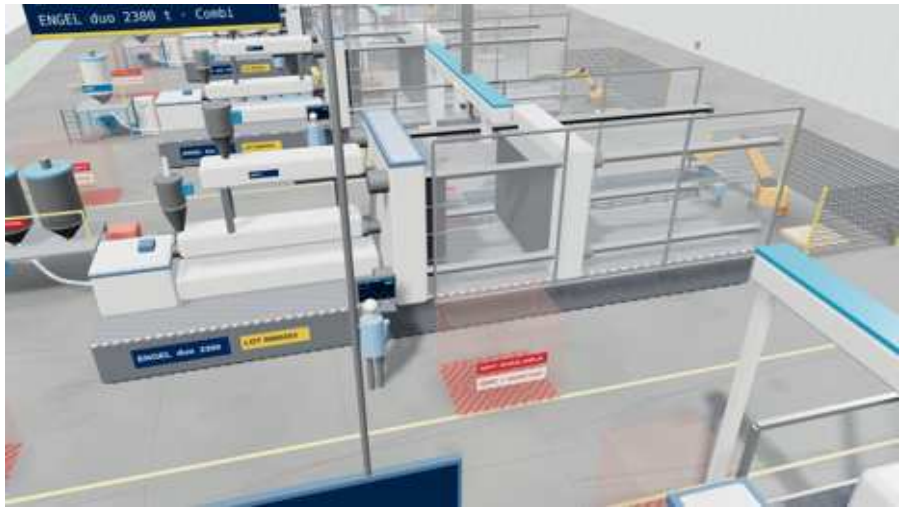

#	Station	Status	Machine / lot
01	**Resin drying**	Machine placed	8060267 Plastic Systems D820P CS TCHC dryer · 2016 · 47.5 kW · 3~400 V · 83 A Supplied with 3 drying hoppers and a support frame with platform.
02	**Material loading**	With press / line	8060253 2 × material hoppers with loaders Ship with the press lot.
03	**Mold temperature control**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
04	**Process cooling (chiller)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Injection molding**	Machine placed	8060253 ENGEL DUO 2300 2F CLS · 2008 · 3~400 V Two-platen, two injection units (Unit 1, Unit 2). Hydraulic oil 3,600 l. Check the 140 t figure before planning rigging.
06	**Quick mold change**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Part take-out robot**	With press / line	8060253 Yudo Giga 3525 4P + Yucon 700 Largest take-out robot in the sale; ships with the press lot with a handheld terminal.
08	**Part conveyor**	Machine placed	8060224 Foam belt conveyor (1 of 5 in lot) Aluminium frame, approx. 1150 × 1700 × 930 mm, 400 mm foam belt (gentle on cosmetic surfaces). Unit 3 of 5 sold together.
09	**Stacking / palletizing robot**	Suggested reuse	8060344 KUKA KR 120 R3100-2 / FLR · 2025 · 3~380–480 V · KR C5 QUANTEC-2, payload 120 kg, reach 3100 mm. From the assembly area, not the molding shop: needs a gripper, safety fence and a hand-off signal from the press.
10	**Sprue regrind (granulator)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · INJECTION MOLDING HALL · LINE 07

IMM Line 7

ENGEL DUO 23050H/11050M/3200 3,200 t · 10 stations · 7 machines placed · 3 not available



#	Station	Status	Machine / lot
01	**Resin drying**	Machine placed	8060261 Shini SD-2000H-LC-D-CE dehumidifying dryer · 2018 · 59.5 kW · 3~400 V Magelis touch panel, 215 × 141 × 206 cm. Largest dryer in the sale, matched to the largest press.
02	**Material loading**	With press / line	8060256 Hopper loader Ships with the press lot.
03	**Mold temperature control**	With press / line	8060256 Yudo twin temperature control units Ship with the press lot.
04	**Process cooling (chiller)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Injection molding**	Machine placed	8060256 ENGEL DUO 23050H/11050M/3200 · 2008 · 3~400 V Largest press: 3,200 t from the model code, two injection units (AGG. 1, AGG. 2). Hydraulic oil 3,000 l.
06	**Quick mold change**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Part take-out robot**	With press / line	8060256 Yudo-Star MEGA-2500-2P gantry frame, platform and ladder Lot text names the gantry frame; confirm the robot arm and controller are included.
08	**Part conveyor**	Machine placed	8060224 Foam belt conveyor (1 of 5 in lot) Aluminium frame, approx. 1150 × 1700 × 930 mm, 400 mm foam belt (gentle on cosmetic surfaces). Unit 4 of 5 sold together.
09	**Stacking / palletizing robot**	Suggested reuse	8060343 KUKA KR 120 R3100-2 / FLR · 2025 · 3~380–480 V · KR C5 QUANTEC-2, payload 120 kg, reach 3100 mm. From the assembly area, not the molding shop: needs a gripper, safety fence and a hand-off signal from the press.
10	**Sprue regrind (granulator)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · HALL


LED Module Production Hall

Lines that repair, mold and test the LED cabinet modules: COB removal and re-dotting, flux spray, dispensing, UV molding, curing, autoclave, black-color, electric and visual test.



Plan view from the 3D model

Line	Process	Stations	Not available
LED Line 1	COB module repair line A	8	2
LED Line 2	COB module repair line B	8	2
LED Line 3	Module molding & test line A	10	0
LED Line 4	Module molding & test line B	10	2
Support	CNT buffer + weight measurement buffer conveyors (The Wall) (8060085, 8060087); KI HEUNG FA KHC-1800SC cooling conveyor (8060165); KVL-520-S + KVL-900SC vacuum loaders, KVU-520SA vacuum unloader (8060023, 8060099, 8060101); KDUSVP-900SA unloaders (3), KDLSVL-900SA dual multi loader (8060112, 8060125, 8060127); 2 × transfer conveyors with overhead suction/finger grippers (8060230, 8060231); Light-c	9	

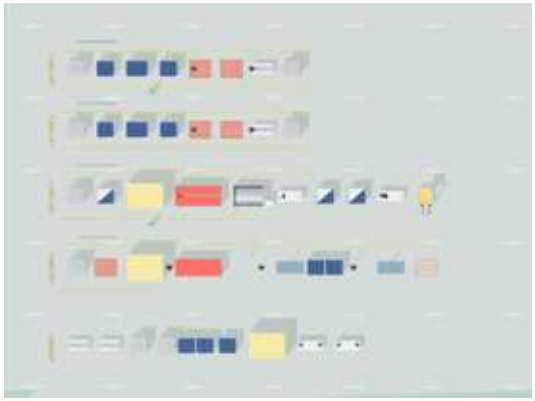

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · LED MODULE PRODUCTION HALL · LINE 01

LED Line 1

COB module repair line A · 8 stations · 6 machines placed · 2 not available



#	Station	Status	Machine / lot
01	**Magazine loading**	Machine placed	8060024 KI HEUNG KFL-900SC magazine loader (CoB) · 2024 · 1~230 V · air 5–6 bar With Keyence safety light curtain.
02	**Defective LED removal**	Machine placed	8060072 ims LCOB-RM20 COB remover · 2022 · 1~220 V · 10 A · air 0.4–0.6 MPa Supplied with 2 monitors and a signal tower.
03	**Solder removal & dotting**	Machine placed	8060073 KOSES KSR-500D solder removal & dotting machine · 2022 · 380 V · 50 A breaker · approx. 1,800 kg
04	**Flux spray**	Machine placed	8060075 KSM KSM-500S flux spray machine · 2021 · 1~220 V · 20 A · approx. 500 kg
05	**LED re-placement**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
06	**Reflow**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Weight measurement buffer**	Machine placed	8060074 Weight measurement buffer conveyor (The Wall) · 2021
08	**Magazine unloading**	Machine placed	8060032 KI HEUNG FA KFU-900SC magazine unloader (CoB M/G) · 1~220 V Plate reads CoB M/G Unloader.



Magazine loading



Defective LED removal



Solder removal & dotting



Flux spray



Weight measurement buffer




Magazine unloading

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · LED MODULE PRODUCTION HALL · LINE 02

LED Line 2

COB module repair line B · 8 stations · 6 machines placed · 2 not available

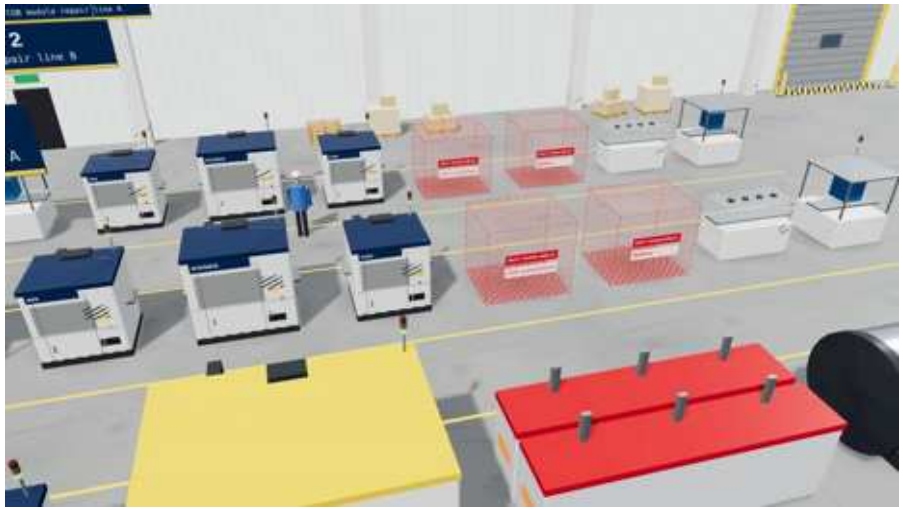

#	Station	Status	Machine / lot
01	**Magazine loading**	Machine placed	8060063 KI HEUNG FA KFL-900SC magazine loader · 2022 · 1~220 V · 240 kg
02	**Defective LED removal**	Machine placed	8060083 ims LCOB-RM20 COB remover · 2022 · 1~220 V · 15 A With fan filter unit.
03	**Solder removal & dotting**	Machine placed	8060084 KOSES KSR-500D solder remove & dotting machine · 2022 · 380 V · approx. 1,800 kg
04	**Flux spray**	Machine placed	8060086 KSM KSM-500S flux spray machine · 2022 · 1~220 V · 20 A · approx. 500 kg
05	**LED re-placement**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
06	**Reflow**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
07	**Weight measurement buffer**	Machine placed	8060076 CNT weight measurement buffer conveyor (The Wall) · 2021
08	**Magazine unloading**	Machine placed	8060098 KI HEUNG FA KFU-900SC magazine unloader · 2022 · 1~220 V



Magazine loading



Defective LED removal



Solder removal & dotting



Flux spray



Weight measurement buffer




Magazine unloading

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · LED MODULE PRODUCTION HALL · LINE 03

LED Line 3

Module molding & test line A · 10 stations · 10 machines placed

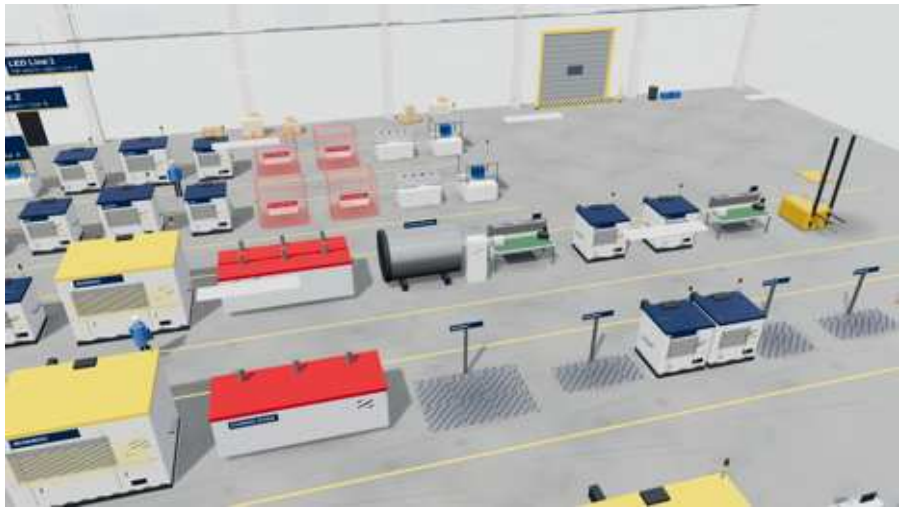

#	Station	Status	Machine / lot
01	**Magazine loading**	Machine placed	8060157 KI HEUNG FA KFL-900SC magazine loader · 2022 · 1~220 V · 260 kg
02	**Cell dispensing**	Machine placed	8060392 BOSUNG TECH BSDCD-100 cell dispensing machine · 2022 · 3~220 V · 13 kVA Only dispensing machine in the catalogue.
03	**UV molding**	Machine placed	8060154 SHINDO ENG. LAB. UV molding machine · 2022 · 3~380 V · 60 A · 7,500 kg
04	**Curing**	Machine placed	8060095, 8060160 2 × Young Am YM-FD045050-2RH4Z0C curing ovens · 2022
05	**Autoclave**	Machine placed	8060152 SHINDO SDAC-SEC03 autoclave · 2022 · 100 °C · 9 bar Serves LED Lines 3 and 4.
06	**Black color inspection**	Machine placed	8060153 Vary Induced Technology BCI-022 black color inspector · 2022 Serves LED Lines 3 and 4.
07	**Electric test**	Machine placed	8060151, 8060109 Na & Na ECT-M0-303 in-line + ECT-SMD-303 electric testers · 2022 · 1~230 V · 15 A
08	**Visual test**	Machine placed	8060164 Na & Na ECT-VI-303 side-fill visual tester · 2022 · 1~230 V · 15 A Serves LED Lines 3 and 4.
09	**Module inspection**	Machine placed	8060150 Na & Na ECT-OFF-303 LED module inspection rack · 2022 Serves LED Lines 3 and 4.
10	**Auto stacking**	Machine placed	8060179 Na & Na ECT-ST-303 auto PCB stacker · 2022 · 1~230 V · 900 kg



Magazine loading



Cell dispensing



UV molding



Curing



Autoclave



Black color inspection

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · LED MODULE PRODUCTION HALL · LINE 04

LED Line 4

Module molding & test line B · 10 stations · 8 machines placed · 2 not available



#	Station	Status	Machine / lot
01	**Magazine loading**	Machine placed	8060163 KI HEUNG FA KFL-900SC magazine loader · 2022 · 1~220 V · 240 kg
02	**Cell dispensing**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
03	**UV molding**	Machine placed	8060156 SHINDO SDUVM-SEC03A UV molding machine · 2022
04	**Curing**	Machine placed	8060166 Young Am YM-FD045050-2RH4Z0C curing oven · 2022
05	**Autoclave**	Shared	8060152 SHINDO SDAC-SEC03 autoclave · 2022 · 100 °C · 9 bar Shared with LED Line 3.
06	**Black color inspection**	Shared	8060153 Vary Induced Technology BCI-022 black color inspector · 2022 Shared with LED Line 3.
07	**Electric test**	Machine placed	8060177, 8060178 2 × Na & Na ECT-CU-303 electric testers · 2022 · 1~230 V · 15 A · 800 kg
08	**Visual test**	Shared	8060164 Na & Na ECT-VI-303 visual tester · 2022 Shared with LED Line 3.
09	**Module inspection**	Shared	8060150 Na & Na ECT-OFF-303 inspection rack · 2022 Shared with LED Line 3.
10	**Auto stacking**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing



Magazine loading



UV molding



Curing



Autoclave



Black color inspection



Electric test

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · HALL


IC Programming Room

Automated handlers that program flash and EEPROM devices before placement, with production programmers and duplicators.



Plan view from the 3D model

Line	Process	Stations	Not available
Programming Line 1	High-volume automated programming	3	0
Programming Line 2	Handler programming cell	3	0

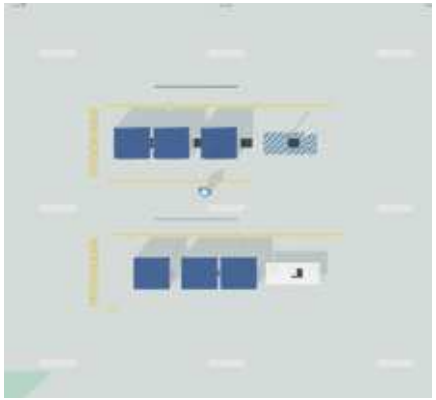

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · IC PROGRAMMING ROOM · LINE 01

Programming Line 1

High-volume automated programming · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Automated programming**	Machine placed	8060134, 8060135 2 × Compass Systems AUTOMAX-3200Plus automated programming systems · 2014
02	**Production programming**	Machine placed	8060296 Compass Systems FPS16 production high-speed programmer
03	**Labeling**	Shared	8060417 Zebra ZT411/ZT420/ZT410/ZM400 label printers · 300 dpi From the packing area label printer pool (51 units).



Automated programming



Production programming

ELECTRONICS & DISPLAY PLANT · IC PROGRAMMING ROOM · LINE 02

Programming Line 2

Handler programming cell · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Automated programming**	Machine placed	8060110, 8060122 Compass Systems AUTOPRO-1203T (2007) + AUTOPRO-1203TL (2010) handlers · 2007/2010
02	**ROM writing**	Machine placed	8060111, 8060113 2 × Compass Systems AutoPro-1203TL ROM writer / IC programming system · 2012 · AC 220 V · air 5 kg/cm²
03	**Media duplication**	Machine placed	8060537 3 × MultiBurn USB duplicators



Automated programming



ROM writing

ELECTRONICS & DISPLAY PLANT · HALL


SMT Support & Rework Room

Everything around the SMT lines: BGA rework, solder paste and stencil preparation, nozzle care, moisture-sensitive device storage and PCB depaneling.



Plan view from the 3D model

Line	Process	Stations	Not available
Rework Cell	BGA and component rework	6	0
Paste & Stencil Prep	Solder paste, stencils and nozzles	6	0
MSD Storage	Moisture-sensitive device storage	4	0
Depaneling Cell	PCB cutting	2	0

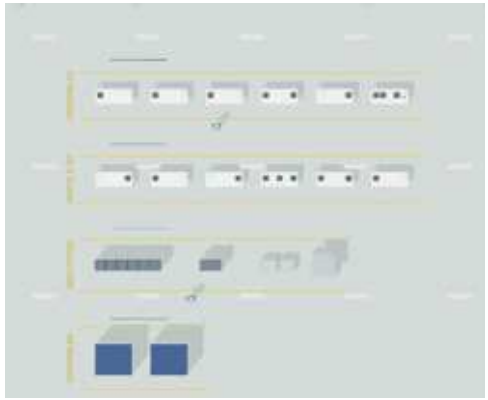

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT SUPPORT & REWORK ROOM · LINE 01

Rework Cell

BGA and component rework · 6 stations · 6 machines placed



#	Station	Status	Machine / lot
01	**BGA rework**	Machine placed	8060052, 8060058 2 × KUKJETRADING TR3000-IRV BGA rework systems · 2022 · AC 220 V · 25 A
02	**Smart rework**	Machine placed	8060053 KUKJETRADING TR3000-HAV smart rework system · 2023 · AC 220 V · 30 A With Weller fume extraction.
03	**Hot-air rework**	Machine placed	8060049 DEN-ON RD-500S III rework system · AC 200–240 V · 1.4 kW
04	**Reballing**	Machine placed	8060287 WON-TECH BRK-2001 BGA reballing kit
05	**Dispensing & soldering**	Machine placed	8060055, 8060539 2 × BANSEOK TAD-200 dispensing controllers, soldering stations
06	**Inspection**	Machine placed	8060147, 8060148, 8060149, 8060330 HiROX RX-100, Hirox KH-7700 digital microscopes, 5 × Olympus SZ61 · 20–5,000×



BGA rework



Smart rework




Hot-air rework



Reballing



Dispensing & soldering



Inspection

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT SUPPORT & REWORK ROOM · LINE 02

Paste & Stencil Prep

Solder paste, stencils and nozzles · 6 stations · 6 machines placed



#	Station	Status	Machine / lot
01	**Paste thawing**	Machine placed	8060061 SEILIECO SCR-3100CLS solder paste thawing unit · 2021 · 10 cans
02	**Paste control**	Machine placed	8060054 SEILIECO SCR-3100SLS solder paste check-right system · 2022
03	**Stencil cleaning**	Machine placed	8060103 JOEUN KISUL JK-MCN650SP-VD metal mask cleaner · 2021 · 220 V · 8 A
04	**Nozzle cleaning**	Machine placed	8060060, 8060124 3 × BOSUNG ENC-24SN nozzle cleaners · 2022–2023
05	**Nozzle inspection**	Machine placed	8060145 BOSUNG ENI-12AP vision inspection tool · 2022 · 12 positions
06	**Feeder splicing**	Machine placed	8060064, 8060123 M.O.A splicing device + 10 SMT splicing devices



Paste thawing



Paste control



Stencil cleaning



Nozzle cleaning



Nozzle inspection



Feeder splicing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT SUPPORT & REWORK ROOM · LINE 03

MSD Storage

Moisture-sensitive device storage · 4 stations · 4 machines placed



#	Station	Status	Machine / lot
01	**Dry storage**	Machine placed	8060170, 8060171, 8060172, 8060173, 8060174, 8060175, 8060176 36 × SEILIECO SRS-1260ST dry cabinets · 2022 · AC 220 V · humidity display
02	**Drying**	Machine placed	8060183 McDRY drying cabinet · AC 230 V
03	**Vacuum sealing**	Machine placed	8060184, 8060391, 8060559 CM KOREA VAC CM600 (2), MAGICSEAL SM600-L vacuum packing machines
04	**ESD storage**	Machine placed	8060228, 8060248, 8060050 ESD PCB and magazine racks, 4 aluminium cabinets



Dry storage



Drying



ESD storage

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT SUPPORT & REWORK ROOM · LINE 04

Depaneling Cell

PCB cutting · 2 stations · 2 machines placed



#	Station	Status	Machine / lot
01	**PCB cutting**	Machine placed	8060180 Hwacheon HIT-400L CNC machining center (PCB cutting) · 2022 · 24,000 rpm · 2,600 kg
02	**PCB cutting**	Machine placed	8060181 Hwacheon HIT-400L CNC machining center · 2022 · 24,000 rpm



PCB cutting




PCB cutting

ELECTRONICS & DISPLAY PLANT · HALL

Display Test & Measurement Lab

The end-of-line and engineering test equipment from the display plant: video pattern generators, LCM testers, color analyzers, safety testers, power meters and oscilloscopes.

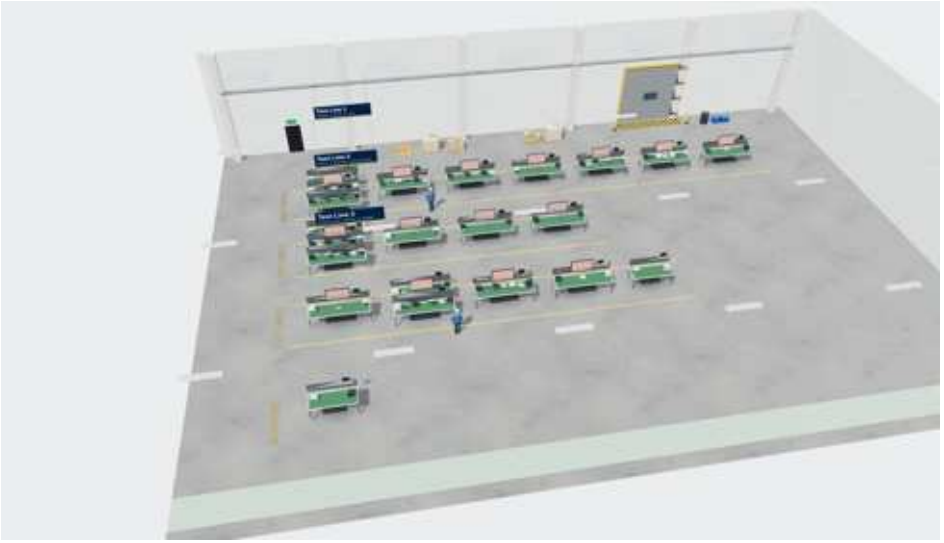

Plan view from the 3D model

Line	Process	Stations	Not available
Test Line 1	Signal & pattern test	7	0
Test Line 2	Color & optical calibration	4	0
Test Line 3	Electrical safety & power	5	0
Support	Bench power supplies, multimeters, grounding testers, torque/force gauges, LCM testers (8060505, 8060509, 8060513, 8060515, 8060518, 8060519, 8060425, 8060426, 8060531)	1	



Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · DISPLAY TEST & MEASUREMENT LAB · LINE 01

Test Line 1

Signal & pattern test · 7 stations · 7 machines placed



#	Station	Status	Machine / lot
01	**Video pattern generation**	Machine placed	8060268, 8060269, 8060270, 8060304, 8060305, 8060306, 8060307, 8060308, 8060309, 8060310 14 × MIK K-8800 + 27 × MIK K-8268 video signal generators · 2005+
02	**LCM test**	Machine placed	8060271, 8060272 6 × MIK K-270L multi-signal LCM testers · 100–240 V
03	**LVDS pattern**	Machine placed	8060275, 8060280 3 × Master MSPG-5400QL + 3 × MSPG-5100 pattern generators
04	**Broadcast signal**	Machine placed	8060277, 8060278, 8060279, 8060281 ShibaSoku TG39AC, R&S; SFE100, 2 × Eiden SSR5000A, Eiden 198B
05	**RF amplification**	Machine placed	8060283, 8060284, 8060285 12 × Eiden 4013A wide band boost amplifiers
06	**Stream playback**	Machine placed	8060316, 8060317, 8060318 11 × Tektronix MTX100 MPEG recorders & players
07	**Interface test**	Machine placed	8060319, 8060320 2 × Teledyne LeCroy 980B advanced test platforms

ELECTRONICS & DISPLAY PLANT · DISPLAY TEST & MEASUREMENT LAB · LINE 02

Test Line 2

Color & optical calibration · 4 stations · 4 machines placed



#	Station	Status	Machine / lot
01	**Color analysis**	Machine placed	8060286, 8060331, 8060332, 8060333, 8060334, 8060335, 8060336, 8060337, 8060338, 8060339, 8060340 91 × Konica Minolta CA-210 display color analyzers
02	**Color analysis**	Machine placed	8060323, 8060324, 8060325, 8060326, 8060327, 8060328 Konica Minolta CA-310 analyzers (12) and probes (8)
03	**Spectroradiometry**	Machine placed	8060292, 8060293 Konica Minolta CS-3000HDR spectroradiometer, CS-100A chroma meter
04	**Imaging photometry**	Machine placed	8060314, 8060282 Radiant ProMetric IP-PMY16 photometer, LAON PEOPLE industrial camera · 16 MP

ELECTRONICS & DISPLAY PLANT · DISPLAY TEST & MEASUREMENT LAB · LINE 03

Test Line 3

Electrical safety & power · 5 stations · 5 machines placed



#	Station	Status	Machine / lot
01	**Electrical safety**	Machine placed	8060297, 8060298, 8060299, 8060300, 8060301, 8060302, 8060303, 8060510 14+ × Chroma 19032 electrical safety analyzers
02	**Power measurement**	Machine placed	8060288, 8060294, 8060508 19 × Yokogawa WT210 digital power meters
03	**Waveform analysis**	Machine placed	8060315, 8060321, 8060322, 8060511 Tektronix TDS5054, 3 × TDS3032C, 2 × TDS2012B, 4 × TDS3032B
04	**EMC test**	Machine placed	8060289, 8060290 R&S; ESPI EMI test receiver + ENV216 V-network · 9 kHz – 3 GHz
05	**Calibration**	Machine placed	8060295, 8060312, 8060313, 8060525 Yokogawa CA71 calibrator, DC-204R strain recorder, charged plate monitors

ELECTRONICS & DISPLAY PLANT · HALL


Quality & Reliability Lab

Environmental and mechanical reliability testers, materials analysis instruments and metrology equipment.



Line	Process	Stations	Not available
Reliability Line	Mechanical & environmental testing	6	0
Materials & Metrology	Analysis and measurement	6	0

Plan view from the 3D model

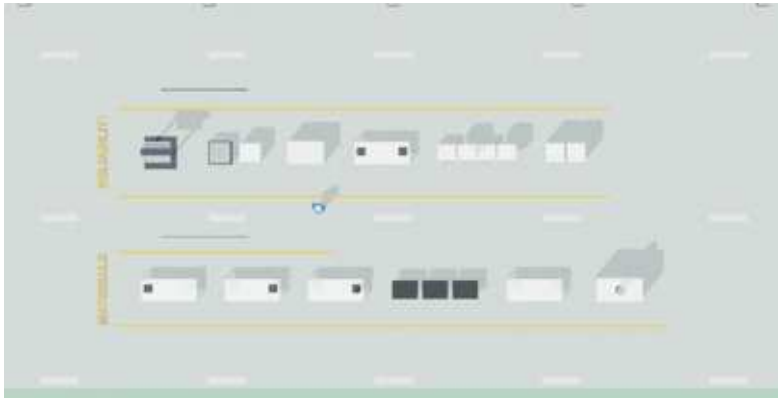

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · QUALITY & RELIABILITY LAB · LINE 01

Reliability Line

Mechanical & environmental testing · 6 stations · 6 machines placed





Thermal aging



Cold storage

#	Station	Status	Machine / lot
01	**Drop test**	Machine placed	8060243, 8060247 Lansmont drop tester (2008) + Lansmont PDT80 · 2008 · 230 V
02	**Vibration test**	Machine placed	8060246 Team HPS-65 vibration test system · Hydraulic
03	**Salt spray**	Machine placed	8060244 ADE Engineering AD-29 salt spray tester · 35 °C chamber · 2 kW
04	**Abrasion & burst**	Machine placed	8060428, 8060429 Kyung Do KDGE-450 abrasion tester, KDGE-260 bursting tester · 2009/2011
05	**Thermal aging**	Machine placed	8060051, 8060185, 8060241, 8060242 4 × LKLAB forced convection ovens (LO-FS250/150) · up to 320 °C
06	**Cold storage**	Machine placed	8060048, 8060169 2 × UDScientific UD-30L500 upright freezers · 2022 · 220 V

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · QUALITY & RELIABILITY LAB · LINE 02

Materials & Metrology

Analysis and measurement · 6 stations · 6 machines placed



#	Station	Status	Machine / lot
01	**X-ray fluorescence**	Machine placed	8060237 Shimadzu EDX-720-P energy dispersive X-ray spectrometer · 220–240 V · 1,000 VA RoHS screening.
02	**Infrared spectroscopy**	Machine placed	8060329 Shimadzu IRAffinity-1S FTIR spectrophotometer
03	**Inspection**	Machine placed	8060274 Olympus IV8420L2 industrial videoscope · 4 mm × 2 m
04	**Dimensional metrology**	Machine placed	8060056, 8060146, 8060377, 8060386, 8060387, 8060388, 8060389, 8060427, 8060240 9 granite surface plates, MATEOS linear positioning system · 2022
05	**Gauges & meters**	Machine placed	8060380, 8060504, 8060514, 8060516, 8060517, 8060521, 8060522, 8060523, 8060524, 8060526, 8060527, 8060528, 8060536, 8060447, 8060538, 8060540 Calipers, micrometers, force/torque gauges, color/gloss meters, particle counter Mixed instrument lots.
06	**Lab safety**	Machine placed	8060059, 8060384 LK Lab FH1200SSS fume hood, Tuttnauer 2340MK steam sterilizer · 2007

ELECTRONICS & DISPLAY PLANT · HALL

Robot Automation Cells

The FANUC and KUKA robots that are not assigned to the injection molding lines, grouped into handling, assembly and labeling cells, plus the AGV.



Plan view from the 3D model

Line	Process	Stations	Not available
Robot Cell 1	Heavy handling / palletizing	3	0
Robot Cell 2	Small-part assembly	4	0
Intralogistics	Automated transport	1	0




Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · ROBOT AUTOMATION CELLS · LINE 01

Robot Cell 1

Heavy handling / palletizing · 3 stations · 3 machines placed

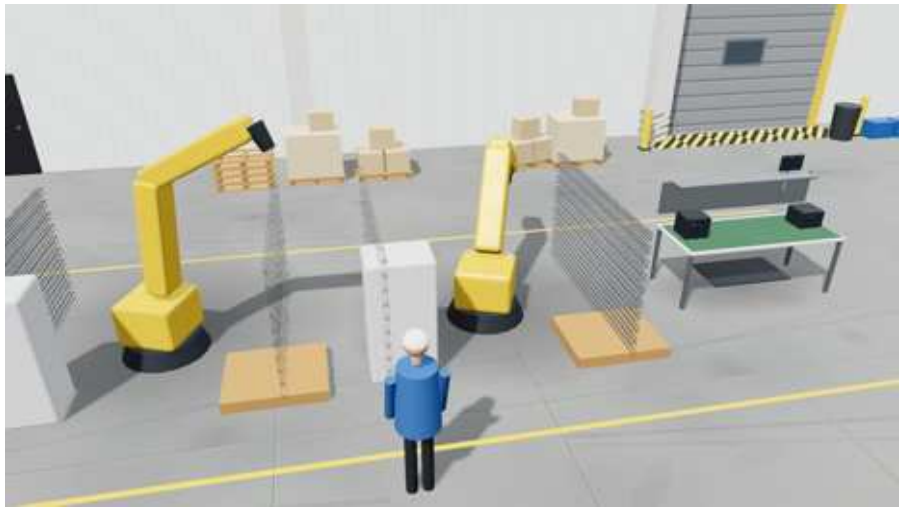


#	Station	Status	Machine / lot
01	**Heavy handling**	Machine placed	8060342 FANUC R-2000iC/210F with R-30iB Plus · 2020 · 210 kg payload · approx. 1,090 kg
02	**Heavy handling**	Machine placed	8060341 FANUC R-2000iB/125L with R-30iA · 2011 · 125 kg payload · 12 kVA
03	**Robot calibration**	Machine placed	8060273 2 × KUKA SEMD/MEMD electronic mastering sets

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · ROBOT AUTOMATION CELLS · LINE 02

Robot Cell 2

Small-part assembly · 4 stations · 4 machines placed

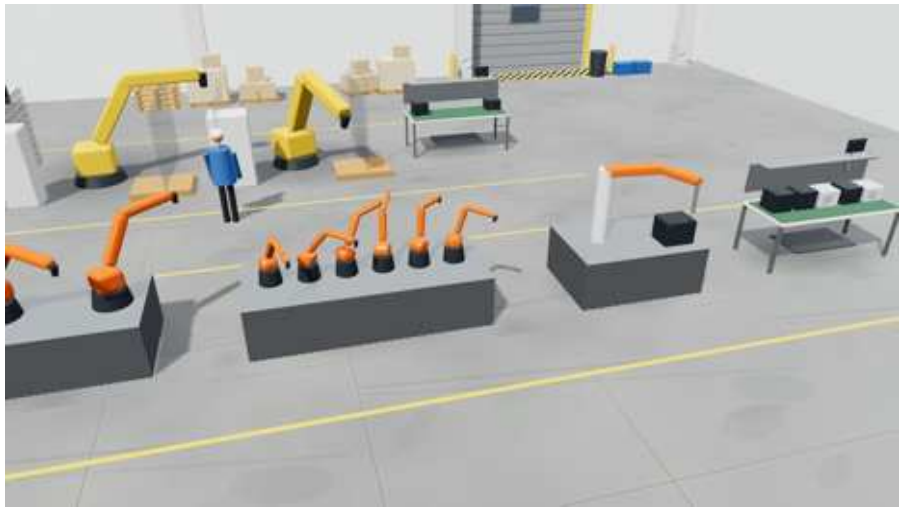



Code reading

#	Station	Status	Machine / lot
01	**Assembly robots**	Machine placed	8060346, 8060347, 8060349 3 × KUKA KR 10 R1440-2 with KR C5 micro · 2025 · 10 kg · 1,440 mm reach
02	**Pick & place**	Machine placed	8060352, 8060353 6 × KUKA KR 3 R540 with KR C4 compact · 2017–2018 · 3 kg · 541 mm reach
03	**Vision labeling**	Machine placed	8060376 KUKA KR 12 R850 SCARA with Keyence SR-5000 + Zebra ZT411 · 2025 · 12 kg · 850 mm Complete labeling cell.
04	**Code reading**	Machine placed	8060379 26 × Keyence SR-2000W barcode readers · 24 V DC

ELECTRONICS & DISPLAY PLANT · ROBOT AUTOMATION CELLS · LINE 03

Intralogistics

Automated transport · 1 stations · 1 machines placed



#	Station	Status	Machine / lot
01	**Autonomous transport**	Machine placed	8060249 UBTECH XCAD101 automated guided vehicle · 25.6 V DC

ELECTRONICS & DISPLAY PLANT · HALL


Packing & Dispatch

The end-of-line logistics of the plant: roller and chain conveyors, vertical lifters, over 20 stretch wrappers, strapping, labeling and weighing.



Plan view from the 3D model

Line	Process	Stations	Not available
Dispatch Line 1	Conveying & lifting	4	0
Dispatch Line 2	Wrapping & strapping	3	0
Dispatch Line 3	Labeling & weighing	3	0

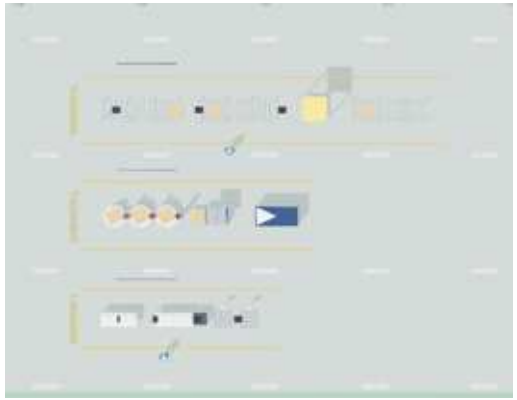

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · PACKING & DISPATCH · LINE 01

Dispatch Line 1

Conveying & lifting · 4 stations · 4 machines placed



#	Station	Status	Machine / lot
01	**Roller conveying**	Machine placed	8060213 10 × motor-driven roller conveyors
02	**Chain conveying**	Machine placed	8060219, 8060357, 8060358, 8060373 38 × chain roller conveyors (approx. 1,400 × 2,050 mm)
03	**Vertical lifting**	Machine placed	8060214, 8060385, 8060480 3 × glass-enclosed lifter conveyor systems · 220 V
04	**Belt conveying**	Machine placed	8060374, 8060378 Foam belt conveyor system + 8 Eurotherm belt conveyors

ELECTRONICS & DISPLAY PLANT · PACKING & DISPATCH · LINE 02

Dispatch Line 2

Wrapping & strapping · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Pallet stretch wrapping**	Machine placed	8060215, 8060216, 8060217, 8060225, 8060226, 8060227, 8060232, 8060233, 8060234, 8060235, 8060359, 8060360, 8060361, 8060362, 8060363, 8060364, 8060365, 8060366, 8060367, 8060390, 8060394, 8060457, 8060555, 8060556 24 × SIAT SW2M / SW2 pallet stretch wrappers · 2006–2017
02	**Strapping**	Machine placed	8060471, 8060354, 8060446, 8060530, 8060503 FEIFER TP 410 strapping machine, DAE EUN DE-960AS banding (defective), strapping tools, PP band · 2018/2022 Banding machine is listed as defective.
03	**Shrink wrapping**	Machine placed	8060245 smipack SL 45 shrink wrapping machine · 2013 · 1,650 W

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · PACKING & DISPATCH · LINE 03

Dispatch Line 3

Labeling & weighing · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Labeling**	Machine placed	8060311, 8060417, 8060448 9 × datamax H-4408, 51 × Zebra ZT4xx/ZM400, Honeywell/Avery printers
02	**Document printing**	Machine placed	8060382 Printronix P7220 line matrix printer
03	**Weighing**	Machine placed	8060395, 8060458, 8060529 2 × KRAJSPOL 1,500 kg floor scales, 5 × TScale 150 kg platform scales · 2010

ELECTRONICS & DISPLAY PLANT · HALL


Warehouse & Material Handling

Storage and internal transport: Jungheinrich high-rack stackers, 61 hand pallet trucks, a terminal tractor, attachments and pallet racking.



Plan view from the 3D model

Line	Process	Stations	Not available
Storage Area	Racking & storage	3	0
Internal Transport	Fleet	5	0

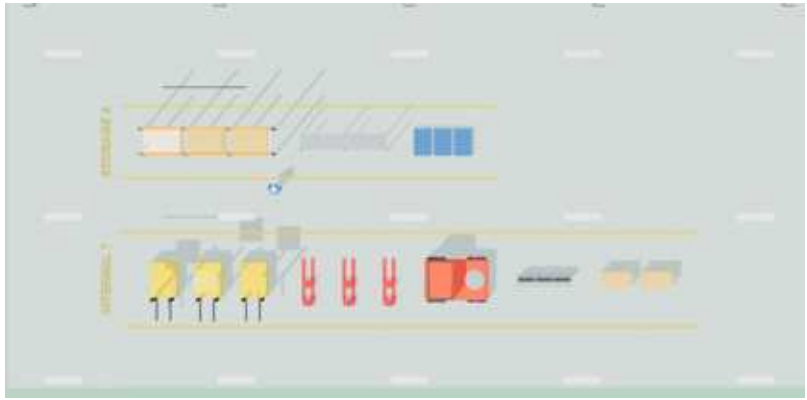

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · WAREHOUSE & MATERIAL HANDLING · LINE 01

Storage Area

Racking & storage · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Pallet racking**	Machine placed	8060186, 8060381, 8060414, 8060474, 8060477, 8060478, 8060476 SLP pallet racking systems (2018/2020) and dismantled racks · 2018–2020
02	**Shelving**	Machine placed	8060475, 8060500, 8060473 Steel shelving, racking components, roller conveyor sections
03	**Containment**	Machine placed	8060356, 8060435 3 × Denios spill containment trays + spill sump · 2024

ELECTRONICS & DISPLAY PLANT · WAREHOUSE & MATERIAL HANDLING · LINE 02

Internal Transport

Fleet · 5 stations · 5 machines placed



#	Station	Status	Machine / lot
01	**High-rack stacking**	Machine placed	8060450, 8060451, 8060452, 8060453, 8060454, 8060455, 8060456, 8060459, 8060460 9 × Jungheinrich EKX 514 high-rack stackers · 2016–2017 · 770 kg · 9,280 mm lift · 80 V
02	**Pallet moving**	Machine placed	8060461, 8060462, 8060463, 8060464, 8060465, 8060466, 8060467, 8060468, 8060469, 8060479, 8060501, 8060502 61 × hand pallet trucks · 2017
03	**Yard tractor**	Machine placed	8060397 Kalmar ST122 terminal tractor · Fifth wheel · Allison transmission
04	**Attachments**	Machine placed	8060441, 8060442, 8060443, 8060444, 8060445 3 × KAUP clamp attachments, forks and extensions · 2003 · 1,000 kg · 200 bar
05	**Trolleys & lifting**	Machine placed	8060239, 8060470, 8060472, 8060238, 8060355, 8060437 8 steel trolleys, 2 mobile lifting frames, container, castors

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · HALL


Maintenance Workshop

The plant maintenance workshop: drilling and milling machines, band saws, welding sets, grinders and compressors.



Line	Process	Stations	Not available
Workshop	Maintenance machining & fabrication	6	0

Plan view from the 3D model

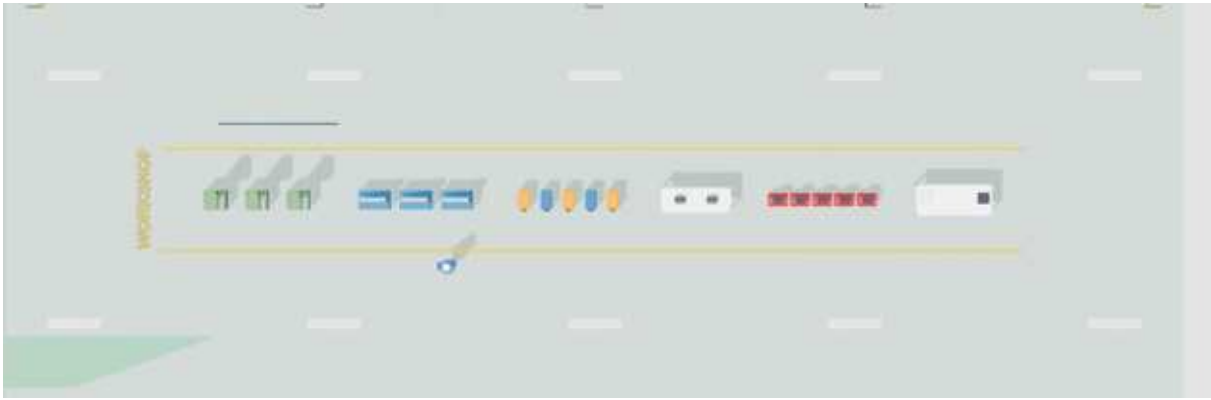


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · MAINTENANCE WORKSHOP · LINE 01

Workshop

Maintenance machining & fabrication · 6 stations · 6 machines placed

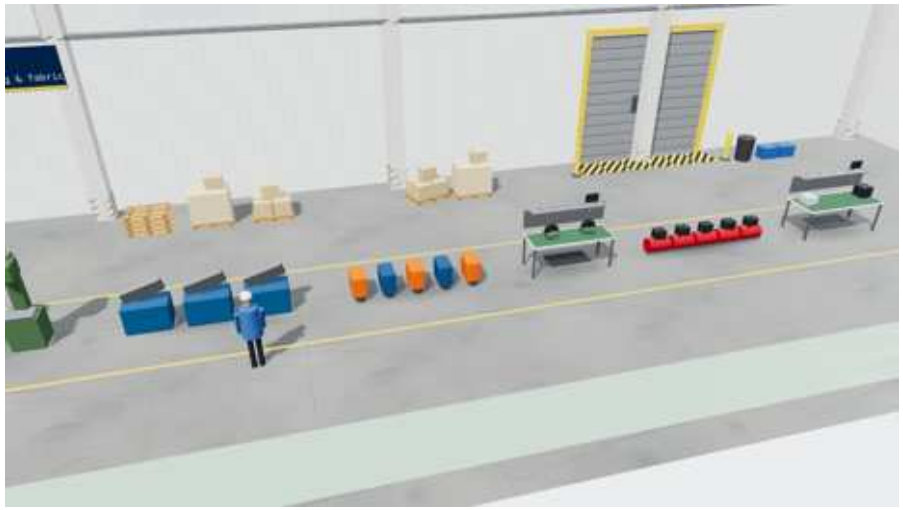

#	Station	Status	Machine / lot
01	**Milling & drilling**	Machine placed	8060187, 8060405, 8060400, 8060410, 8060403 2 × Bernardo KF 25 mill-drills, 2 × Holzmann ZS 50APS, PROMA bench drill · 2014–2022
02	**Sawing**	Machine placed	8060372, 8060398, 8060399, 8060412, 8060189 PROMA PPK-200U, 3 × Optimum band saws, Milwaukee CHS 355 · 2015
03	**Welding**	Machine placed	8060401, 8060402, 8060407, 8060408, 8060409 Kemppi Minarc 220, Stamos S-MIG 250, Iskravar MIG 240, 2 × Telwin Technomig 223
04	**Grinding**	Machine placed	8060404, 8060411 Fein GI752H belt grinder, metabo DSD 250 bench grinder
05	**Compressed air**	Machine placed	8060368, 8060369, 8060370, 8060371, 8060406, 8060561 6 portable compressors (Güde, Scheppach, Einhell, Makita) · 2014–2024 · 2.2 kW
06	**Benches & spares**	Machine placed	8060188, 8060430, 8060534, 8060413, 8060436, 8060449, 8060532, 8060535 Work benches, tool sets, spare parts and electrical components

ELECTRONICS & DISPLAY PLANT · HALL


Facility, Utilities & Office

Plant infrastructure: transformers, voltage regulators, UPS, nitrogen generators, cleanroom gowning, more than 700 staff lockers, IT and AV equipment.



Plan view from the 3D model

Line	Process	Stations	Not available
Utilities	Power & process gases	3	0
Cleanroom & Staff	Gowning, cleaning and lockers	4	0
IT & AV	Office and meeting rooms	3	0

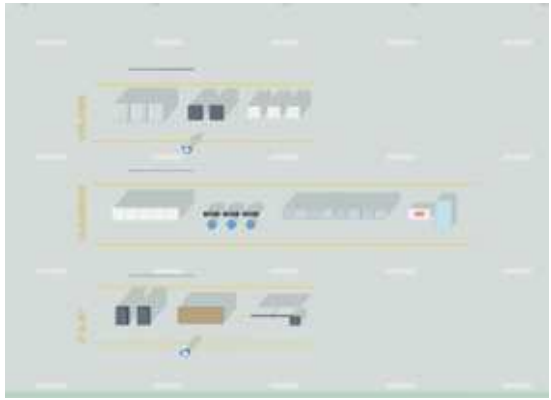

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · FACILITY, UTILITIES & OFFICE · LINE 01

Utilities

Power & process gases · 3 stations · 3 machines placed






Nitrogen

#	Station	Status	Machine / lot
01	**Power conditioning**	Machine placed	8060057, 8060221, 8060222, 8060223 WYES 15 kVA transformer, 3 × automatic voltage regulators (50 kVA) · 2022–2025 · 380/220 V
02	**Backup power**	Machine placed	8060104, 8060546 Salicru SLC-5000 TWIN UPS, Altron FIELD 20 UPS (20 kVA)
03	**Nitrogen**	Machine placed	8060082, 8060133, 8060162 TSM ESP-N25R, TSM ESP-N30R-99, NAO TECH NI10-4NC nitrogen generators · 2021–2022 · 10–30 m³/h · 99.99 %

ELECTRONICS & DISPLAY PLANT · FACILITY, UTILITIES & OFFICE · LINE 02

Cleanroom & Staff

Gowning, cleaning and lockers · 4 stations · 4 machines placed

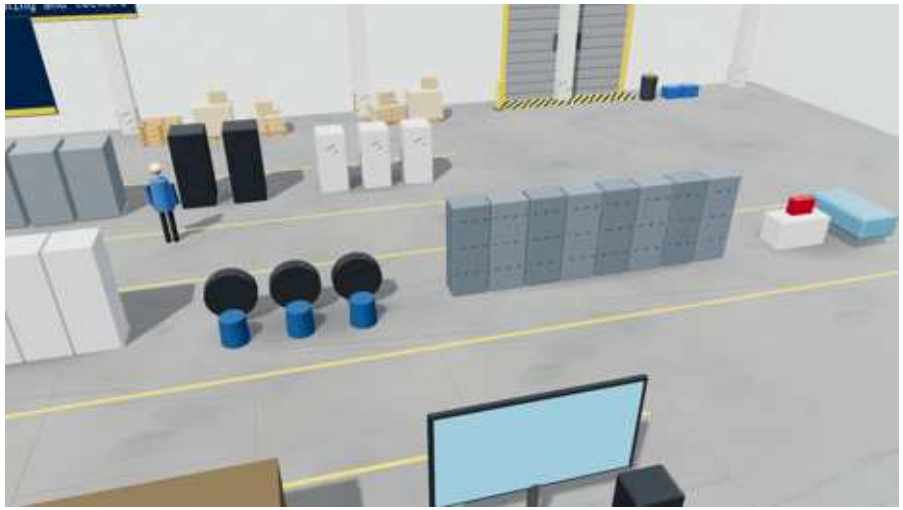

#	Station	Status	Machine / lot
01	**Cleanroom entry**	Machine placed	8060102, 8060105, 8060106, 8060107, 8060062 10 clean lockers, gowning station, TAEHOON shoe cleaning machine
02	**Climate & cleaning**	Machine placed	8060533, 8060557, 8060562, 8060433, 8060434, 8060439, 8060440, 8060558 9 humidifiers, 3 drum fans, 19 industrial/cleanroom vacuums, 2 floor machines
03	**Staff lockers**	Machine placed	8060190, 8060191, 8060192, 8060193, 8060194, 8060195, 8060196, 8060197, 8060198, 8060199, 8060200, 8060201, 8060202, 8060203, 8060204, 8060205, 8060206, 8060207, 8060208, 8060209, 8060210, 8060211, 8060212, 8060542, 8060543, 8060544, 8060545 Approx. 840 metal lockers and locker cabinets
04	**Medical & safety**	Machine placed	8060383, 8060420, 8060421, 8060553, 8060560 3 defibrillators, A-dec 335 dental unit, helmets and harnesses · 2012–2014

ELECTRONICS & DISPLAY PLANT · FACILITY, UTILITIES & OFFICE · LINE 03

IT & AV

Office and meeting rooms · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**IT**	Machine placed	8060415, 8060416, 8060418, 8060419 Servers, firewalls, PCs, SSD/HDD stock, IT spare parts
02	**Displays**	Machine placed	8060541 200 × Samsung LCD monitors
03	**Conferencing & AV**	Machine placed	8060547, 8060549, 8060548, 8060551, 8060552, 8060554 2 Cisco video conferencing systems, JBL speakers, audio rack, Samsung laser projector

JÁSZBERÉNY, HUNGARY · DOMESTIC REFRIGERATORS · ~440,000 A YEAR

Refrigerator Manufacturing Plant

Contents of a domestic refrigerator factory with an annual output of about 440,000 units, offered as a complete plant. The 31 listings are grouped into 5 halls that follow the refrigerator process: coil cutting and panel forming, sheet extrusion and liner thermoforming, evaporators and insulation panels, powder coating, and cabinet and door foaming with packing.

5	14	40	33	31	31	90	6
Halls	Lines & areas	Stations	Machines placed	Catalogue lots	Units	Photographs	Not available








Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · SITE PLAN

Plant layout

Every hall as a plan view from its 3D model, with the number of lines and the approximate footprint. Halls are arranged for overview and are not to scale between each other.

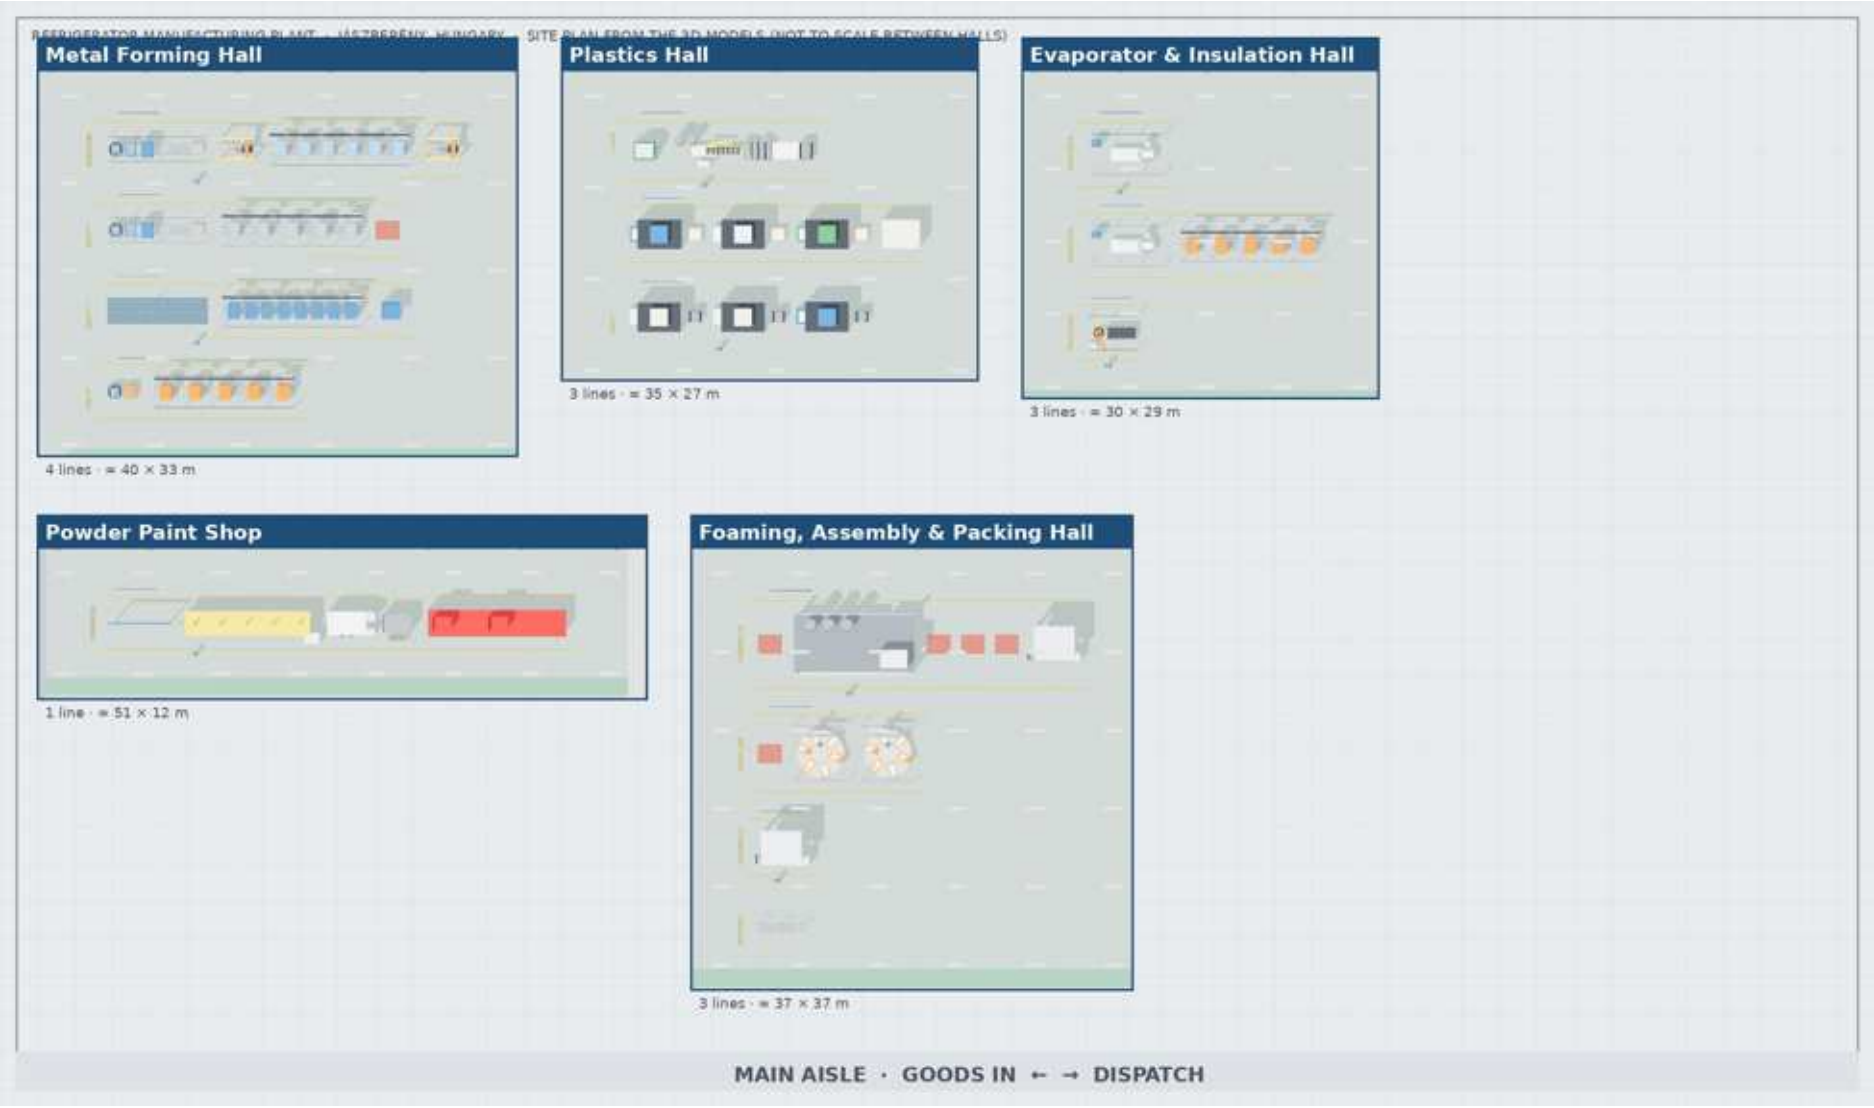

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALLS

Halls and departments

Hall / department	Lines / areas	Stations	Not available	What it covers
Metal Forming Hall	4	12	1	Coil cutting and sheet-metal forming of side, door and top panels
Plastics Hall	3	9	0	Sheet co-extrusion, liner thermoforming, laser punching and regrind
Evaporator & Insulation Hall	3	4	0	Freezer and wrapped evaporators, vacuum insulation panels
Powder Paint Shop	1	5	0	Washing, powder coating and curing on a 388 m overhead conveyor
Foaming, Assembly & Packing Hall	3	10	5	Cabinet and door foaming, final assembly, test and shrink-hood packing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALL


Metal Forming Hall

Pre-painted steel coils are cut to length, then formed into cabinet side panels (wrap-around), door panels and top panels on four automatic punching and bending lines.



Plan view from the 3D model


Line	Process	Stations	Not available
Side Panel Line	COSMA line fed by the QS cut-to-length press	4	0
Door Panel Line A	MAS line, sheets from the Sacma slitting line	3	1
Door Panel Line B	TEAS 12-station line	3	0
Top Panel Line	QS coil-fed shearing, bending and punching	2	0

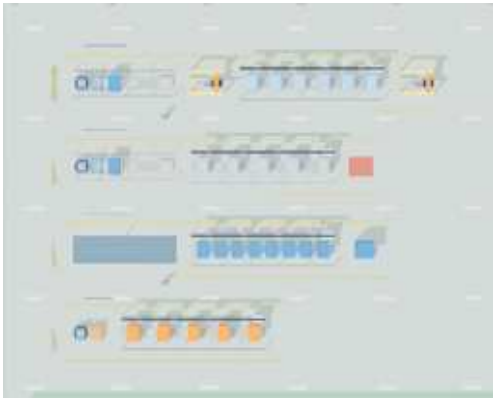

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 01

Side Panel Line

COSMA line fed by the QS cut-to-length press · 4 stations · 4 machines placed

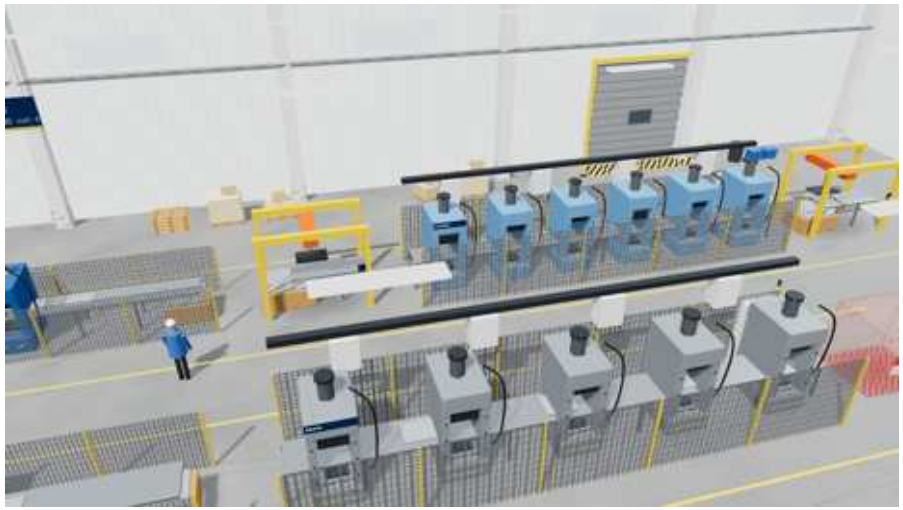

#	Station	Status	Machine / lot
01	**Coil decoiling & cut-to-length**	Machine placed	6022006 QS metal sheet cutting press (cut-to-length line) · 2004 · 400 V 50 Hz · 20 m/min (max 30) Coil 500–900 mm wide, sheet up to 2100 mm, 0.4–0.6 mm. Changeover about 15 min.
02	**Sheet check & loading**	Machine placed	6022004 COSMA sheet checking and automatic loading (part of line) · 2018 · 400 V 50 Hz · 10 s per panel Sheet size and weight check, automatic loading. Part of the COSMA line.
03	**Punching, bending & cutting (6 stations)**	Machine placed	6022004 COSMA metal sheet forming line (side panels) · 2018 · 400 V 50 Hz · 10 s per panel Sheet checking for size and weight, 6 bending/punching/cutting stations, automatic loading/unloading, 2 KUKA pick-and-place robots, fenced 67 m area.
04	**Robot unloading & stacking**	Machine placed	6022004 2 × KUKA pick-and-place robots (part of COSMA line) · 2018 · 400 V 50 Hz · 10 s per panel Two KUKA robots with controllers unload the formed side panels.



Coil decoiling & cut-to-length




Sheet check & loading

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 02

Door Panel Line A

MAS line, sheets from the Sacma slitting line · 3 stations · 2 machines placed · 1 not available

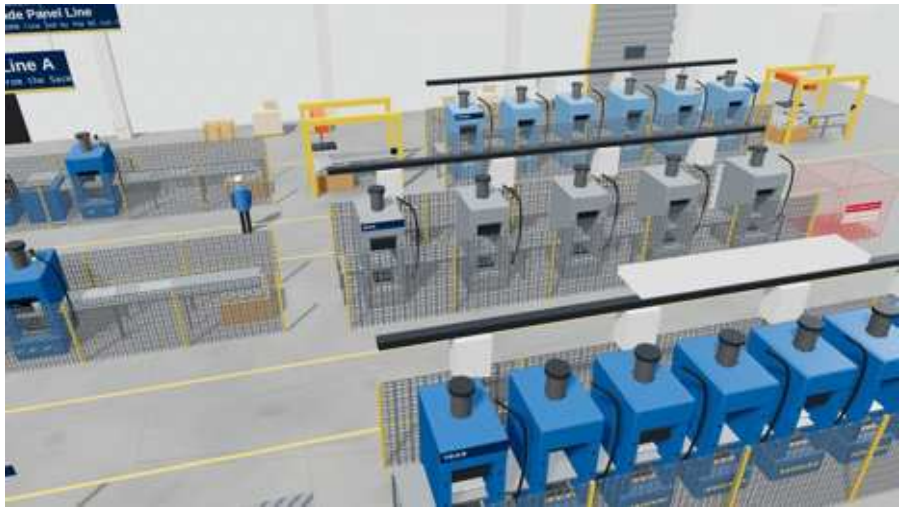



Coil slitting & cut-to-length



Punching & bending


#	Station	Status	Machine / lot
01	**Coil slitting & cut-to-length**	Machine placed	6022003 Sacma cutting and slitting line · 1975 · 400 V 50 Hz · decoiling up to 12 m/min Coil 300–1280 mm wide, max 12 t; sheet 450–3000 mm; 0.4–1.0 mm thick.
02	**Punching & bending**	Machine placed	6022001 MAS metal sheet forming line (fridge door panels) · 2023 · 400 V 50 Hz · air 4.5–6 bar · 10 s cycle Laser-measured sheet loading, punching/bending station with 2 blade sets, 2 spare forming slots, 2nd punching station, 2 scrap conveyors, Siemens S7. 89,963 pieces made.
03	**Door panel stacking robot**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 03

Door Panel Line B

TEAS 12-station line · 3 stations · 3 machines placed

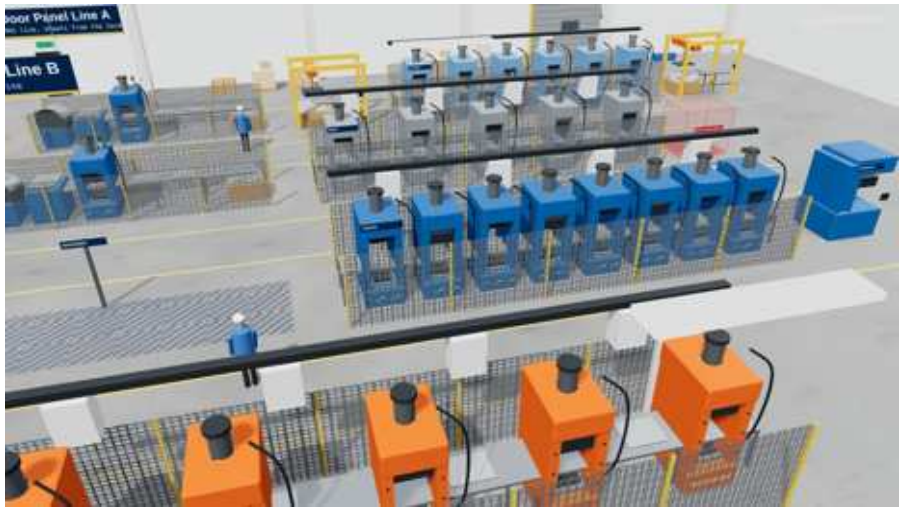

#	Station	Status	Machine / lot
01	**Coil slitting & cut-to-length**	Shared	6022003 Sacma cutting and slitting line · 1975 · 400 V 50 Hz · decoiling up to 12 m/min Uses the Sacma slitting line placed on Door Panel Line A.
02	**Punching, bending & fixing insertion (12 stations)**	Machine placed	6022005 TEAS metal sheet forming line (fridge door panels) · 2010 · 400 V 50 Hz · 27 s cycle 12 stations for punching, long-side and short-side bending and mechanical insertion of fixings.
03	**Extra punching**	Machine placed	6022015 Konkoly punching machine · 2020 · 400 V · 40 A · 6 bar About 30 s cycle; 10–30 min changeover depending on tooling. 5,500 kg.



Coil slitting & cut-to-length



Punching, bending & fixing insertion (12 stations)



Extra punching

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · METAL FORMING HALL · LINE 04

Top Panel Line

QS coil-fed shearing, bending and punching · 2 stations · 2 machines placed





Coil decoiling

#	Station	Status	Machine / lot
01	**Coil decoiling**	Machine placed	6022002 QS coil uncoiler and feeder (part of line) · 2004 · 400 V 50 Hz · 25 s cycle · coil 632 × 0.5 mm Coil 632 mm × 0.5 mm feeds the line directly.
02	**Shearing, bending & punching (R89–R189)**	Machine placed	6022002 QS metal sheet forming line (top panels) · 2004 · 400 V 50 Hz · 25 s cycle · coil 632 × 0.5 mm Coil-fed shearing, bending and punching stations R89, R109, R125, R145, R157, R189. Automatic changeover.

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALL


Plastics Hall

Plastic sheet is co-extruded on the Battenfeld line, wound into rolls or cut into sheets, and vacuum-formed into cabinet inner liners and door liners. Scrap is ground back into the extruder.



Plan view from the 3D model

Line	Process	Stations	Not available
Sheet Extrusion Line	Battenfeld co-extrusion with regrind	2	0
Inner Liner Line	3 COMI sheet-fed thermoformers + laser punching	4	0
Door Liner Line	3 roll-fed thermoformers	3	0

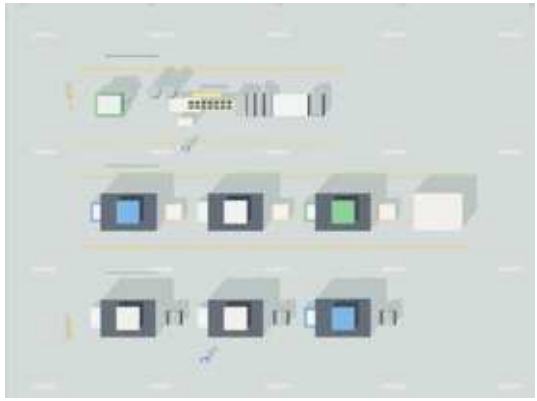


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · PLASTICS HALL · LINE 01

Sheet Extrusion Line

Battenfeld co-extrusion with regrind · 2 stations · 2 machines placed

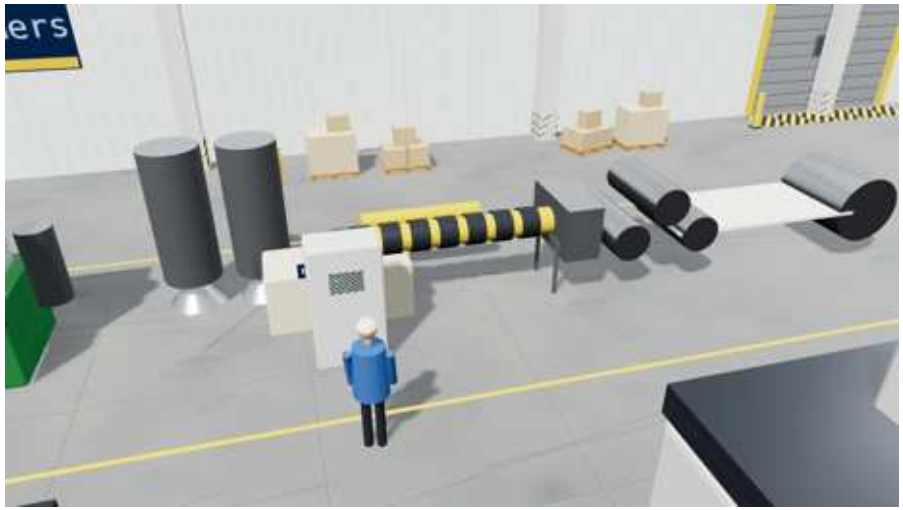



Granulate feeding & regrind



Co-extrusion, calendering & winding

#	Station	Status	Machine / lot
01	**Granulate feeding & regrind**	Machine placed	6022009 Rapid 500-120 granulator (1200 kg/h) · 2003 · 37 kW · rotor Ø450 mm Up to 1,200 kg/h (≈450–500 kg/h on liner scrap). 3-blade open rotor, 8 mm screen, 3,600 kg.
02	**Co-extrusion, calendering & winding**	Machine placed	6022008 Battenfeld BEX-1-150-32-D-V / BEX 45-25E co-extrusion sheet line · 1999 · 50 Hz · 6 bar · 1000–1200 kg/h 2 feed silos, metal separators, main extruder 7 heating zones + vacuum zone, co-extruder 3 zones, 3 calenders, thickness gauge, corona treatment, automatic coil changing, edge slitting. Sheet 1–5 mm, up to ~1480 mm wide.

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · PLASTICS HALL · LINE 02

Inner Liner Line

3 COMI sheet-fed thermoformers + laser punching · 4 stations · 4 machines placed



#	Station	Status	Machine / lot
01	**Thermoforming 1**	Machine placed	6022010 COMI BL 2200x900x600 thermoforming machine (inner liners) · 2013 · 380 V 50 Hz · 269 kW Forming 2200 × 900 mm, depth 600 mm, 3 loading stations, heating station, pressure + vacuum forming, 4 trimming presses (guillotine). 400 kN platen. 30 t.
02	**Thermoforming 2**	Machine placed	6022011 COMI thermoforming machine (inner liners) · 2007 · 375 kW Forming 2005 × 905 mm, depth 550 mm, 3 loading stations, 750 m³/h vacuum, 4 trimming presses. 35 t.
03	**Thermoforming 3**	Machine placed	6022013 COMI SL200x90 NG DX thermoforming machine (inner liners) · 1993 · 399 kW Mould base 2000 × 900 mm, part height 550 mm, 570 m³/h vacuum, 4,000 L tanks. 25 t.
04	**Laser punching of liners**	Machine placed	6022016 ELEN Blade RF 333 laser cutting cell on ABB robot (inner-liner punching) · 2013 · 400 V 50 Hz · 600 W laser ABB robot with IRC5 controller (36,000 h), enclosure, turning table and air extraction. About 60 s cycle.



Thermoforming 1



Thermoforming 2



Thermoforming 3



Laser punching of liners

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · PLASTICS HALL · LINE 03

Door Liner Line

3 roll-fed thermoformers · 3 stations · 3 machines placed



#	Station	Status	Machine / lot
01	**Roll-fed thermoforming 1**	Machine placed	6022007 QS VF-20-08-02 roll-feed thermoforming machine (door liners) · 2003 · 400 V 50 Hz · 280 kW · 465 A Roll unwind (max Ø1200, 570–850 mm wide), upper/lower heating 2 × 67.2 kW, forming, clamping ring, pre-stretch/cooling dome, 2 × 240 m³/h vacuum pumps. Workshop manuals.
02	**Roll-fed thermoforming 2**	Machine placed	6022012 Illig UA 200/1g thermoforming machine (door liners) · 1999 · 3 × 380–400 V · ~105 kW Forming 1960 × 960 mm, draw depth 600 mm, roll-fed (QS unwind Ø1200), ±0.2 mm indexing.
03	**Roll-fed thermoforming 3**	Machine placed	6022014 COMI HEDL 2000x800x200 thermoforming machine (door liners) · 2014 · 264 kW Coil-fed 580–900 mm, frame 2004 × 804 mm, part height 150/200 mm, upper heating 168 kW, trimming press. 20 t.



Roll-fed thermoforming 1



Roll-fed thermoforming 2



Roll-fed thermoforming 3

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALL


Evaporator & Insulation Hall

Aluminium tube and tape are made into freezer-compartment and wrapped evaporators, and vacuum insulation panels are pressed for the cabinets.



Plan view from the 3D model


Line	Process	Stations	Not available
Wrapped Evaporator Line	TEAS 2013	1	0
Freezer Evaporator Line	TEAS automatic + manual line	2	0
Insulation Panel Cell	KUKA KR210 pressing cell	1	0

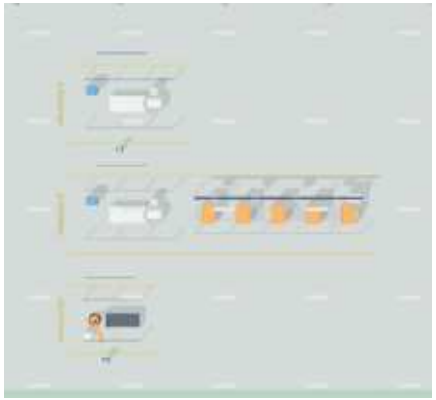

REFRIGERATOR MANUFACTURING PLANT · EVAPORATOR & INSULATION HALL · LINE 01

Wrapped Evaporator Line

TEAS 2013 · 1 stations · 1 machines placed

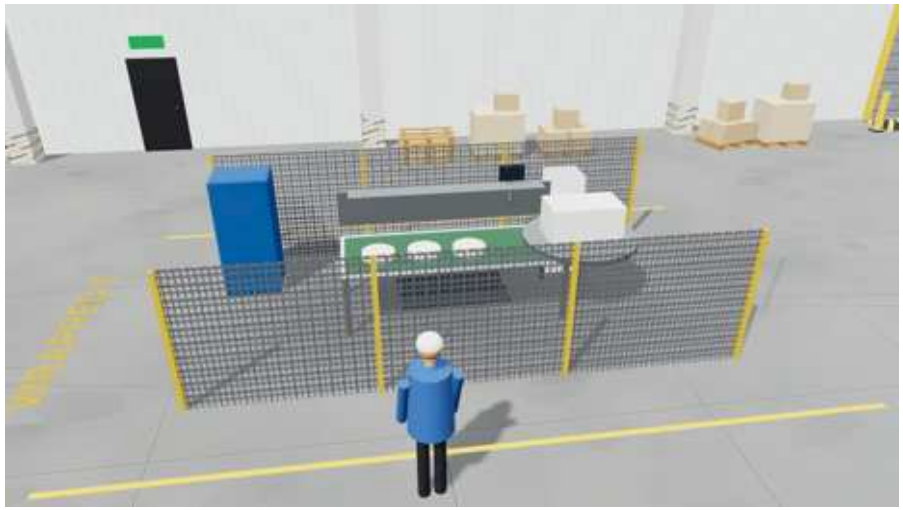

#	Station	Status	Machine / lot
01	**Freezer tape & tube wrapping**	Machine placed	6022029 TEAS wrapped evaporator line · 2013 · 80 kW · 400 V · 5.5–6 bar 396 pcs per shift. Freezer tape application, tube wrapping with aluminium tape and conductive paste. Al tube Ø7.5 × 0.75 mm.



Freezer tape & tube wrapping

REFRIGERATOR MANUFACTURING PLANT · EVAPORATOR & INSULATION HALL · LINE 02

Freezer Evaporator Line

TEAS automatic + manual line · 2 stations · 2 machines placed



#	Station	Status	Machine / lot
01	**Compartment forming & tube taping (automatic)**	Machine placed	6022030 TEAS freezer compartment evaporator line · 1999 · 5.5–6 bar About 400 pcs per shift, 67.5 s cycle. Al sheet 0.35 mm, Al tube Ø7.5 mm.
02	**Compartment forming, tube bending & reduction (manual)**	Machine placed	6022031 Manual freezer compartment evaporator line (combi fridges) Station 1 compartment forming, station 2 tube bending and taping, station 3 tube diameter reduction.



Compartment forming & tube taping (automatic)




Compartment forming, tube bending & reduction (manual)

REFRIGERATOR MANUFACTURING PLANT · EVAPORATOR & INSULATION HALL · LINE 03

Insulation Panel Cell

KUKA KR210 pressing cell · 1 stations · 1 machines placed

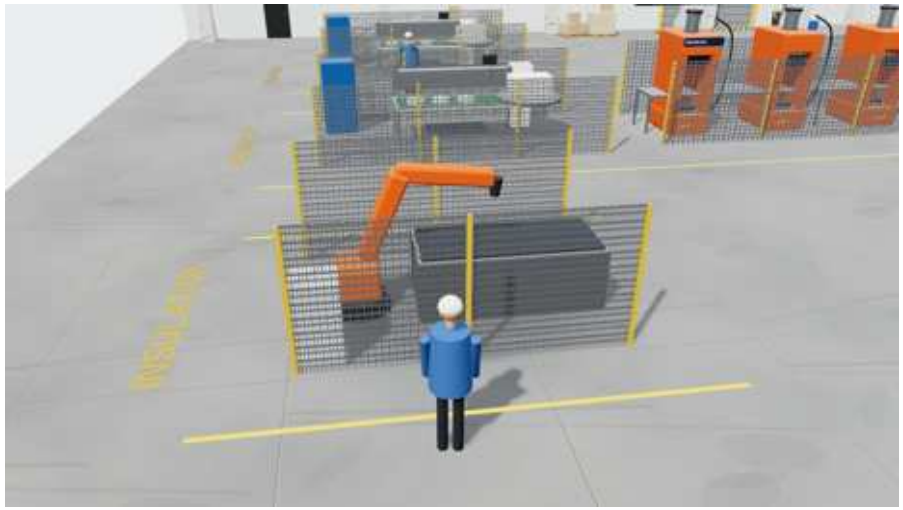

#	Station	Status	Machine / lot
01	**Vacuum insulation panel pressing**	Machine placed	6022021 KUKA KR210 L180-2 vacuum insulation panel pressing workstation · 2005 Renewed and installed 2019, about 1 million cycles, table 2500 × 1000 mm, manual load/unload.




Vacuum insulation panel pressing

REFRIGERATOR MANUFACTURING PLANT · HALL


Powder Paint Shop

Parts hang on the 388 m overhead conveyor and run through the washing tunnel and dryer, the automatic and manual Wagner powder booths, and the 120 m curing oven.

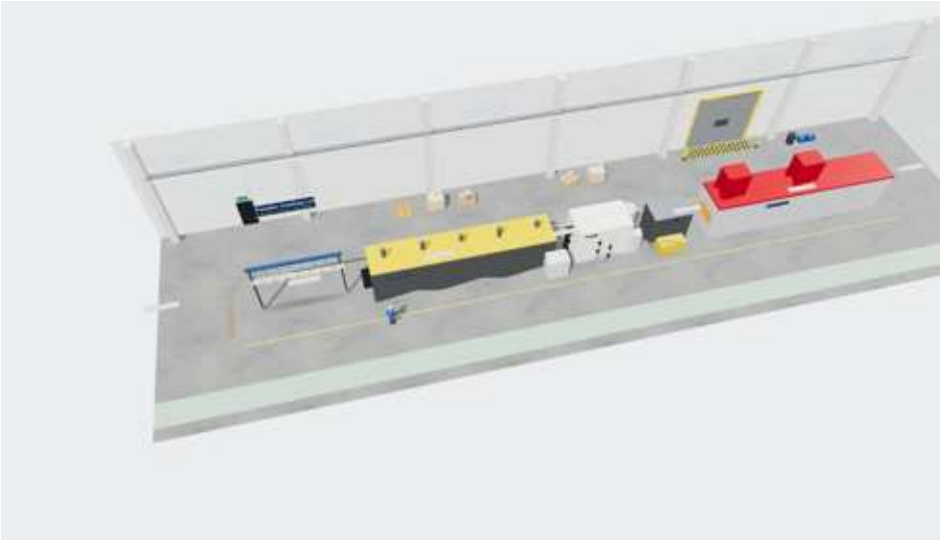

Line	Process	Stations	Not available
Powder Coating Line	Overhead conveyor, 385 hangers	5	0

Plan view from the 3D model

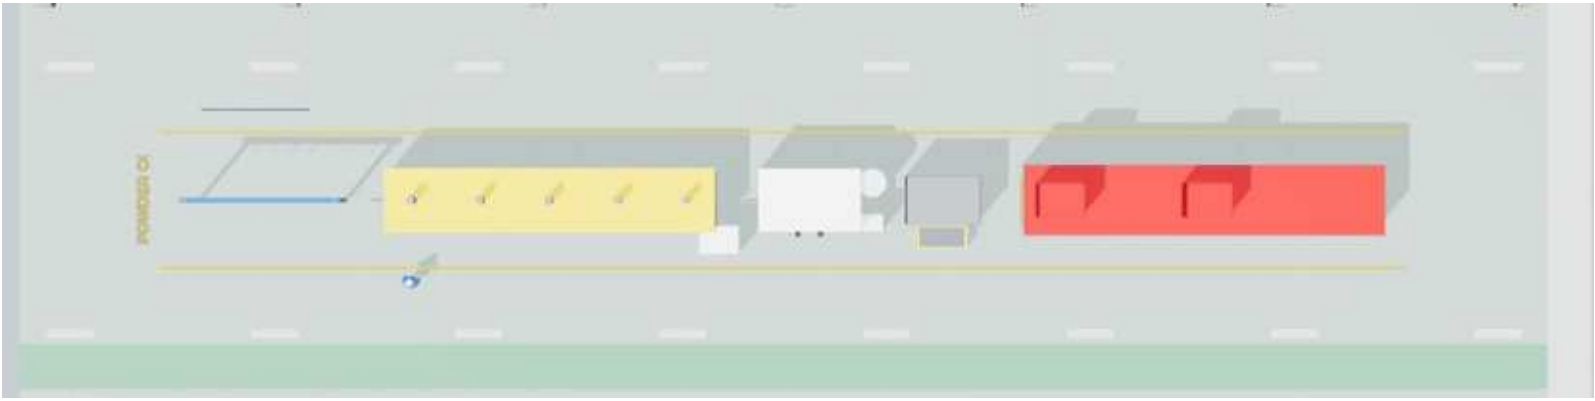


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · POWDER PAINT SHOP · LINE 01

Powder Coating Line

Overhead conveyor, 385 hangers · 5 stations · 5 machines placed

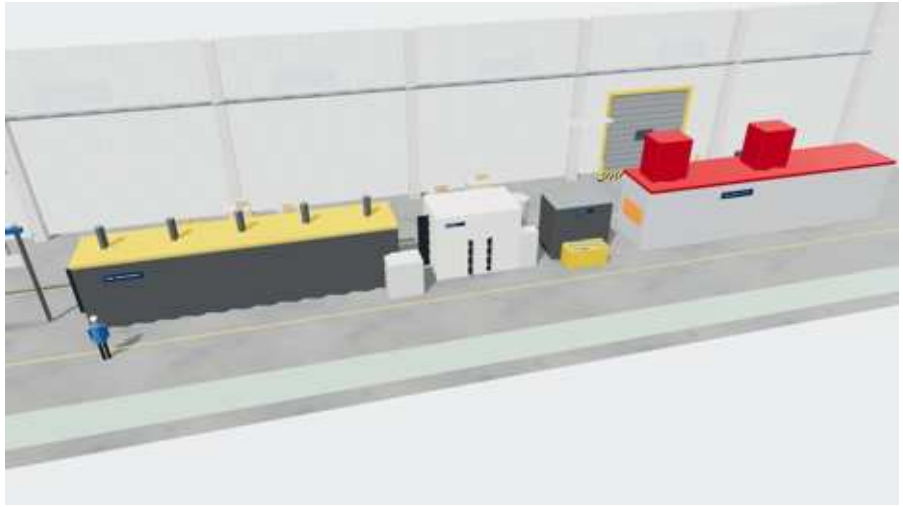

#	Station	Status	Machine / lot
01	**Hanging & overhead conveyor**	Machine placed	6022026 Flex coop powder painting overhead conveyor (388 m) · 2001 · 400 V 50 Hz · 4 m/min 385 hanging points at 800 mm. Chain renewed 2019.
02	**Washing & drying (pre-treatment)**	Machine placed	6022022 Conveyor-fed industrial washing machine (pre-treatment) · 1,200 kW hot-water burner · pumps 8 × 11 kW + 6 × 7 kW Ion-exchange washing tunnel and skid hot-air dryer in snake layout, 60 m each.
03	**Automatic powder coating**	Machine placed	6022024 Wagner automatic powder painting line · 2001 · Wagner Itep control (2019) 2 × 10-nozzle and 2 × 2-nozzle guns, 2 dedusters, paint recovery unit, Parker Hiross oil remover (2019).
04	**Manual touch-up booth**	Machine placed	6022023 Wagner manual powder painting booth · 2001 Twin operator platforms, doors both sides, stainless steel, 2 dedusting units. Not in use.
05	**Curing oven & cooling**	Machine placed	6022025 Paint line drying oven (2 × 630 kW burners) · 2 × 630 kW gas burners Curing oven with cooling zone, total length 120 m.



Hanging & overhead conveyor



Washing & drying (pre-treatment)



Automatic powder coating



Manual touch-up booth



Curing oven & cooling

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · HALL


Foaming, Assembly & Packing Hall

Outer cabinets and liners are foamed with polyurethane, doors are foamed on two carousel machines, then units are assembled, charged, tested and shrink-hood packed.



Plan view from the 3D model

Line	Process	Stations	Not available
Cabinet Line	KraussMaffei 8-fixture foaming	6	4
Door Line	2 carousel door foaming machines	3	1
Packing Line 2	Second Thimon shrink-hood	1	0
Support	Workshop, logistics and IT equipment (partner online auctions) (60200000)	1	

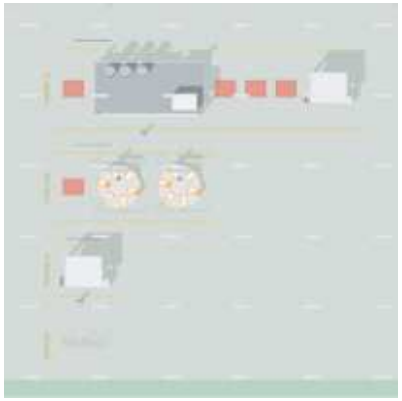


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · FOAMING, ASSEMBLY & PACKING HALL · LINE 01

Cabinet Line

KraussMaffei 8-fixture foaming · 6 stations · 2 machines placed · 4 not available

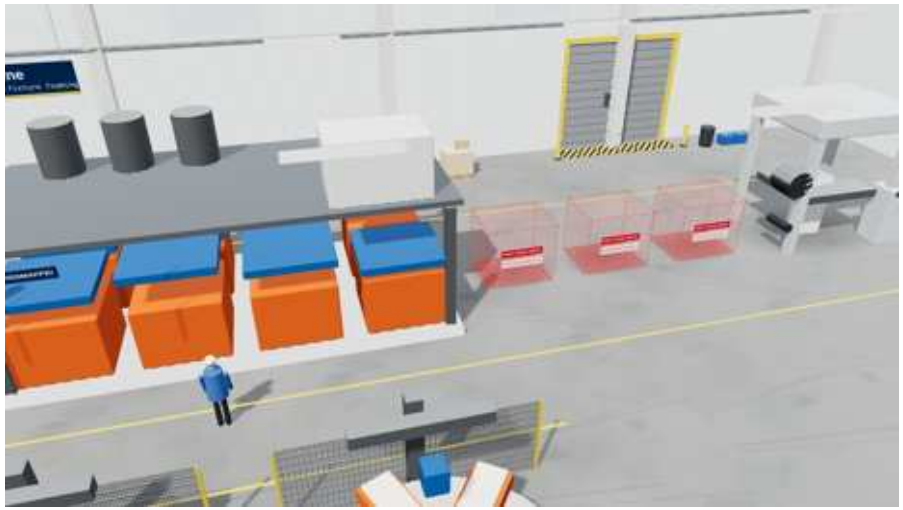

#	Station	Status	Machine / lot
01	**Cabinet pre-assembly (liner into outer cabinet)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
02	**Cabinet foaming**	Machine placed	6022017 KraussMaffei cabinet foaming plant (8 fixtures) · 2008 · Polyol/cyclopentane + isocyanate Dry system: 8 (2 × 4) fixtures, face-up foaming, cabinets on pallets. Wet system on mezzanine: 500 L tanks, pre-mixer, mixing heads 2,000 and 1,300 g/s, ATEX enclosure, mould storage for 54 moulds. Over 5 million cycles.
03	**Final assembly (compressor, piping)**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
04	**Refrigerant charging & leak test**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
05	**Functional & electrical test**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
06	**Shrink-hood packing**	Machine placed	6022027 Thimon Coverpal 1250 shrink-hood packaging machine · 1999 · Natural-gas shrink hood Over 7 million cycles; product up to 600 × 600 × 2000 mm.



Cabinet foaming




Shrink-hood packing

REFRIGERATOR MANUFACTURING PLANT · FOAMING, ASSEMBLY & PACKING HALL · LINE 02

Door Line

2 carousel door foaming machines · 3 stations · 2 machines placed · 1 not available

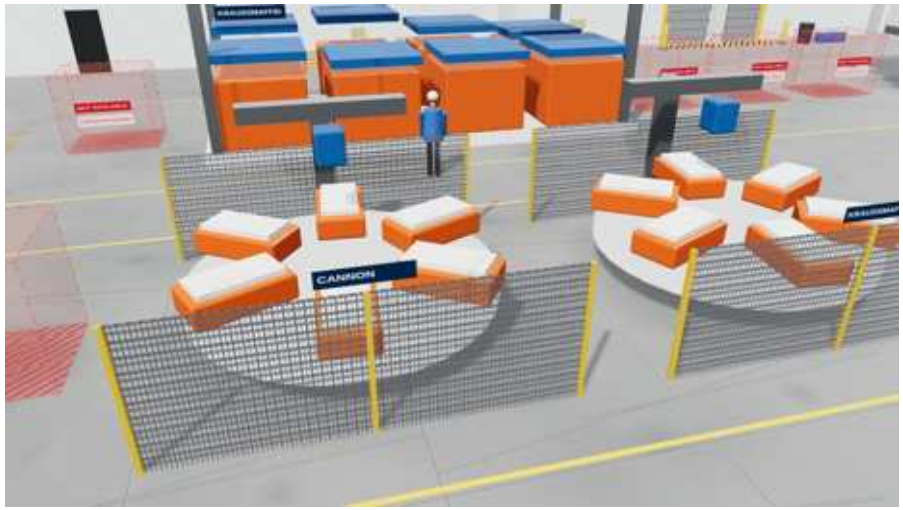

#	Station	Status	Machine / lot
01	**Door pre-assembly**	NOT AVAILABLE	NOT AVAILABLE — no machine in the listing
02	**Door foaming (twin carousel)**	Machine placed	6022018 Cannon twin side-by-side door foaming machine (6-mould carousel) · 1999 · 400 V 50 Hz · Puromat 30 Fixture 2300 × 800 mm, closing height 160 mm, about 60 s cycle.
03	**Door foaming (carousel)**	Machine placed	6022020 KraussMaffei door foaming machine (6-mould carousel) · 2012 · 400 V 50 Hz Foaming pallet 2500 × 800 × 200 mm, about 60 s cycle, tooling racks (tooling not included).



Door foaming (twin carousel)



Door foaming (carousel)

REFRIGERATOR MANUFACTURING PLANT · FOAMING, ASSEMBLY & PACKING HALL · LINE 03

Packing Line 2

Second Thimon shrink-hood · 1 stations · 1 machines placed





Shrink-hood packing

#	Station	Status	Machine / lot
01	**Shrink-hood packing**	Machine placed	6022028 Thimon Coverpal 1250 shrink-hood packaging machine · 1999 · Natural-gas shrink hood Over 7 million cycles; product up to 600 × 600 × 2000 mm.

LULEÅ, SWEDEN · HOT STAMPING · BODY-IN-WHITE PARTS

Automotive Press Hardening Plant

A complete press hardening (hot stamping) plant for structural and safety-critical car body parts. 30 machines form four lines from blanking through furnace, hydraulic press, 3D laser trimming, shot blasting and CMM inspection, plus the deep drawing press, the tool shop and the robot grinding cell.

1	4	28	19	31	31	93	0
Halls	Lines & areas	Stations	Machines placed	Catalogue lots	Units	Photographs	Not available








Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

AUTOMOTIVE PRESS HARDENING PLANT · SITE PLAN

Plant layout

Every hall as a plan view from its 3D model, with the number of lines and the approximate footprint. Halls are arranged for overview and are not to scale between each other.

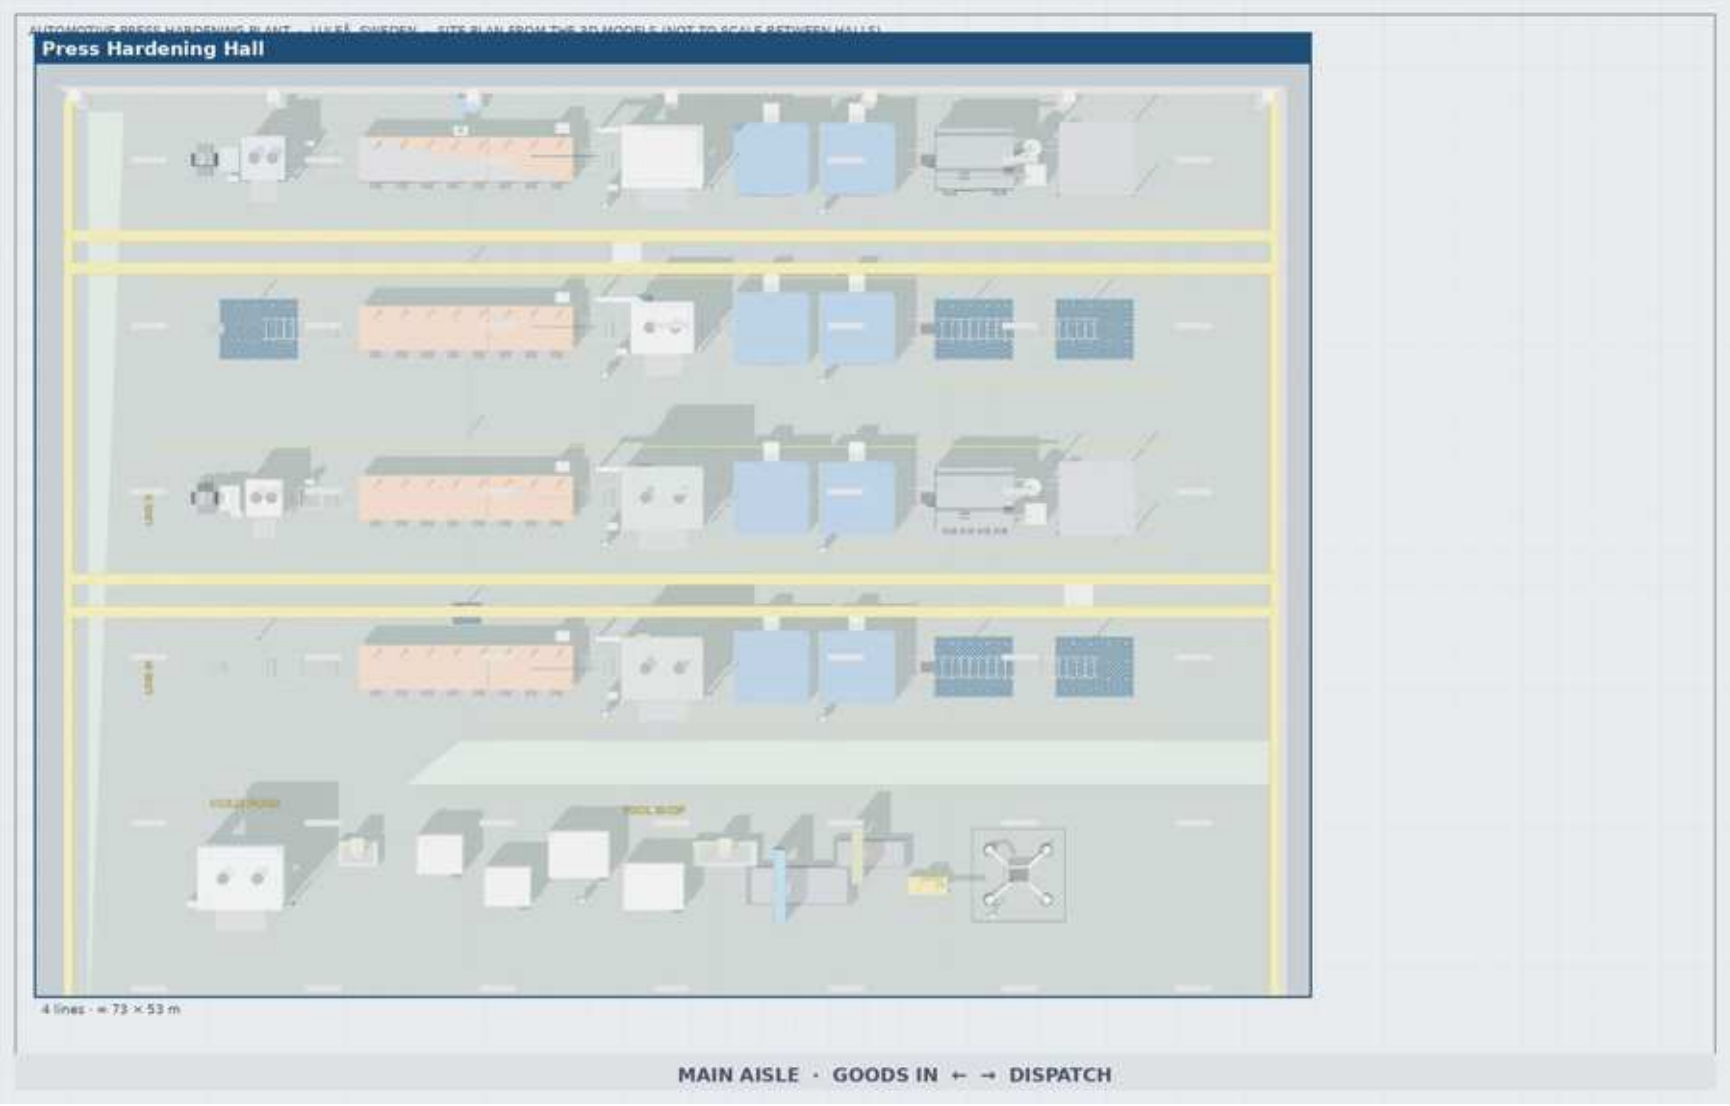

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

AUTOMOTIVE PRESS HARDENING PLANT · HALLS

Halls and departments

Hall / department	Lines / areas	Stations	Not available	What it covers
Press Hardening Hall	4	28	0	Four hot-stamping lines with support departments

AUTOMOTIVE PRESS HARDENING PLANT · HALL

Press Hardening Hall

Blanking, furnace heating with atmosphere control, hydraulic press hardening, 3D laser trimming, shot blasting and CMM inspection, with tool shop and robot grinding along the aisle.



Plan view from the 3D model

Line	Process	Stations	Not available
Press Hardening Line 1	Schuler SHC 1200-3.2x1.4 1,200 t	7	0
Press Hardening Line 2	Schuler HPDZB 500-2150/500 500 t	7	0
Press Hardening Line 3	Cavenaghi CRH12 000KNKM 1,200 t	7	0
Press Hardening Line 4	Cavenaghi CRCK 15001 1,200 t	7	0
Support	Schuler SML4-1000-3,6x2,6-1100 deep drawing press (HF-2); Deckel Maho DMU 80P duoBlock 5-axis machining center (TS-1); Deckel Maho DMU 100 monoBlock 5-axis machining center (TS-2); Deckel Maho DMU 125 P hi-dyn 5-axis machining center (TS-3); Matsuura FX-10 3-axis high-speed machining center (TS-4); Danobat RMT-1600 CNC-1 surface grinding machine (TS-5); Zayer KPU/AR 5-axis machining center (TS-6);	11	



AUTOMOTIVE PRESS HARDENING PLANT · PRESS HARDENING HALL

Press Hardening Hall — 7 process steps

Step	Station	What happens
S01	**Blanking**	Steel coil is uncoiled, straightened and cut into flat blanks on a mechanical blanking press, then stacked for the furnace.
S02	**Furnace heating**	Blanks run through a continuous furnace and are heated to austenitizing temperature (typically around 900–950 °C for boron steel) so they can be formed hot.
S03	**Furnace atmosphere control**	A central system controls the protective gas atmosphere in the furnaces, which limits scale and decarburization on the hot blanks.
S04	**Hot forming & die quenching**	The hot blank is moved into the hydraulic press, formed in one stroke and held closed while the water-cooled die quenches it, turning it into ultra-high-strength martensitic steel.
S05	**3D laser trimming**	Hardened parts are too hard for trim dies, so 5-axis 3D laser cells cut the outline, holes and slots. Each line has two cells to keep up with the press.
S06	**Shot blasting**	Steel shot blasts the parts to remove furnace scale before welding and painting.
S07	**Quality inspection (CMM)**	A coordinate measuring machine checks part geometry, trim lines and hole positions against the CAD model.

AUTOMOTIVE PRESS HARDENING PLANT · PRESS HARDENING HALL · LINE 01

Press Hardening Line 1

Schuler SHC 1200-3.2x1.4 1,200 t · 7 stations · 7 machines placed



#	Station	Status	Machine / lot
01	**Blanking**	Machine placed	HF-3 Müller-Weingarten HUQ 630.28 blanking line · 1996/2012 · 630 t · 15–60 strokes/min Mechanical blanking line, rebuilt 2012. Serves Lines 1 and 2.
02	**Furnace heating**	With press / line	HF-1 Continuous furnace (part of the press hardening line) · 2007 The furnace ships with the press hardening line HF-1.
03	**Furnace atmosphere control**	Machine placed	HF-8 ITSAB central furnace atmosphere control system · 2025 · Central gas atmosphere control for all furnaces New in 2025. One central system serves all four press hardening lines.
04	**Hot forming & die quenching**	Machine placed	HF-1 Schuler SHC 1200-3.2x1.4 hydraulic press hardening line · 2007 · 1,200 t · stroke 1,200 mm · 360 mm/s Newest and fastest press hardening line in the plant.
05	**3D laser trimming**	Machine placed	LC-1 + LC-2 2 × Trumpf TruLaser Cell 8030 L45 · 2015 · 5-axis 3D laser · TruDisk 3001 · 3 kW each Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
06	**Shot blasting**	Machine placed	SF-1 Schlick Roto-jet shot blasting system · 1988 · Roto-jet blast machine Serves Lines 1 and 2.
07	**Quality inspection (CMM)**	Machine placed	QC-2 Carl Zeiss Contura G2 RDS CMM · 2007 · 3-axis CMM with RDS articulating probe head Serves Lines 1 and 2.


Blanking


Furnace heating


Furnace atmosphere control


3D laser trimming


Shot blasting


Quality inspection (CMM)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

AUTOMOTIVE PRESS HARDENING PLANT · PRESS HARDENING HALL · LINE 02

Press Hardening Line 2

Schuler HPDZB 500-2150/500 500 t · 7 stations · 7 machines placed



#	Station	Status	Machine / lot
01	**Blanking**	Shared	HF-3 Müller-Weingarten HUQ 630.28 blanking line · 1996/2012 · 630 t · 15–60 strokes/min One unit shared with Line 1; it is placed in the 3D hall on Line 1.
02	**Furnace heating**	With press / line	HF-5 Continuous furnace (part of the press hardening line) · 2002 The furnace ships with the press hardening line HF-5.
03	**Furnace atmosphere control**	Shared	HF-8 ITSAB central furnace atmosphere control system · 2025 · Central gas atmosphere control One unit shared with Line 1; it is placed in the 3D hall on Line 1.
04	**Hot forming & die quenching**	Machine placed	HF-5 Schuler HPDZB 500-2150/500 hydraulic press hardening line · 2002 · 500 t · stroke 1,200 mm · 110 mm/s Smallest press hardening line, suited to smaller parts.
05	**3D laser trimming**	Machine placed	LC-3 + LC-4 2 × Trumpf TruLaser Cell 8030 L45 · 2014 / 2015 · 5-axis 3D laser · TruDisk 3001 · 3 kW each Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
06	**Shot blasting**	Shared	SF-1 Schlick Roto-jet shot blasting system · 1988 · Roto-jet blast machine One unit shared with Line 1; it is placed in the 3D hall on Line 1.
07	**Quality inspection (CMM)**	Shared	QC-2 Carl Zeiss Contura G2 RDS CMM · 2007 · 3-axis CMM One unit shared with Line 1; it is placed in the 3D hall on Line 1.


Blanking


Furnace heating


Furnace atmosphere control


3D laser trimming


Shot blasting


Quality inspection (CMM)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

AUTOMOTIVE PRESS HARDENING PLANT · PRESS HARDENING HALL · LINE 03

Press Hardening Line 3

Cavenaghi CRH12 000KNKM 1,200 t · 7 stations · 7 machines placed



#	Station	Status	Machine / lot
01	**Blanking**	Machine placed	HF-4 Benelli blanking line · 1962 · 250 t · stroke 150 mm Oldest machine in the plant (1962). Serves Lines 3 and 4; check condition before relying on it.
02	**Furnace heating**	With press / line	HF-6 Continuous furnace (part of the press hardening line) · 1994 The furnace ships with the press hardening line HF-6.
03	**Furnace atmosphere control**	Shared	HF-8 ITSAB central furnace atmosphere control system · 2025 · Central gas atmosphere control One unit shared with Line 1; it is placed in the 3D hall on Line 1.
04	**Hot forming & die quenching**	Machine placed	HF-6 Cavenaghi CRH12 000KNKM hydraulic press hardening line · 1994 · 1,200 t · stroke 720 mm · 120 mm/s
05	**3D laser trimming**	Machine placed	LC-5 + LC-6 2 × Trumpf TruLaser Cell 8030 L45 / TruLaser Cell 7040 L31 · 2014 / 2010 · 5-axis 3D laser · TruDisk 3001 · 3 kW / TruDisk 4001 · 4 kW Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
06	**Shot blasting**	Machine placed	SF-2 Spencer & Halstead 12-wheel monorail shot blasting system · 1995 · 12 blast wheels · monorail hanger Serves Lines 3 and 4.
07	**Quality inspection (CMM)**	Machine placed	QC-1 Carl Zeiss Prismo 10 CMM · 2001 · 3-axis CMM Serves Lines 3 and 4.



Blanking



Furnace heating




Furnace atmosphere control



3D laser trimming



Shot blasting



Quality inspection (CMM)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

AUTOMOTIVE PRESS HARDENING PLANT · PRESS HARDENING HALL · LINE 04

Press Hardening Line 4

Cavenaghi CRCK 15001 1,200 t · 7 stations · 7 machines placed



#	Station	Status	Machine / lot
01	**Blanking**	Shared	HF-4 Benelli blanking line · 1962 · 250 t · stroke 150 mm One unit shared with Line 3; it is placed in the 3D hall on Line 3.
02	**Furnace heating**	With press / line	HF-7 Continuous furnace (part of the press hardening line) · 1989 The furnace ships with the press hardening line HF-7.
03	**Furnace atmosphere control**	Shared	HF-8 ITSAB central furnace atmosphere control system · 2025 · Central gas atmosphere control One unit shared with Line 1; it is placed in the 3D hall on Line 1.
04	**Hot forming & die quenching**	Machine placed	HF-7 Cavenaghi CRCK 15001 hydraulic press hardening line · 1989 · 1,200 t · stroke 800 mm · 60 mm/s Oldest and slowest press hardening line.
05	**3D laser trimming**	Machine placed	LC-7 + LC-8 2 × Trumpf TruLaser Cell 7040 L31 · 2010/2021 · 5-axis 3D laser · TruDisk 4001 · 4 kW each Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
06	**Shot blasting**	Shared	SF-2 Spencer & Halstead 12-wheel monorail shot blasting system · 1995 · 12 blast wheels One unit shared with Line 3; it is placed in the 3D hall on Line 3.
07	**Quality inspection (CMM)**	Shared	QC-1 Carl Zeiss Prismo 10 CMM · 2001 · 3-axis CMM One unit shared with Line 3; it is placed in the 3D hall on Line 3.



Blanking



Furnace heating




Furnace atmosphere control



3D laser trimming



Shot blasting



Quality inspection (CMM)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · EQUIPMENT CATALOGUE

Category-wise machinery summary

Units follow the quantities stated in the plant catalogue. Each lot is listed with its catalogue sheet or photographs on the following pages.

Equipment category	Group	Lots	Units
Screen Printing & Solder Paste	SMT / PCB equipment catalogue	13	14
Inspection – SPI / AOI / Vision	SMT / PCB equipment catalogue	12	15
Reflow, Curing & Nitrogen	SMT / PCB equipment catalogue	14	14
PCB Handling – Conveyors, Loaders & Buffers	SMT / PCB equipment catalogue	80	82
Marking, Cleaning & Surface Prep	SMT / PCB equipment catalogue	13	13
Programming & Electrical Test	SMT / PCB equipment catalogue	15	15
Rework & Repair	SMT / PCB equipment catalogue	7	7
Depaneling (CNC PCB Cutting)	SMT / PCB equipment catalogue	2	2
LED Module Encapsulation	SMT / PCB equipment catalogue	3	3
Material Storage & Line Support	SMT / PCB equipment catalogue	18	82
Injection Molding & Plastics	Other plant equipment	18	18
Industrial Robots & Automation	Other plant equipment	17	17
Test & Measurement Equipment	Other plant equipment	121	121
Material Handling & Logistics	Other plant equipment	52	52
Storage & Racking	Other plant equipment	47	47
Packaging & Labelling	Other plant equipment	35	35
Workshop & Machine Tools	Other plant equipment	27	27
Facility, IT & Office	Other plant equipment	29	29
Other SMT & PCB Items	Other plant equipment	4	4
TOTAL		527	597

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Screen Printing & Solder Paste — 13 lots · 14 units

Screen Printer ITW EAE MOMENTUM II BTB · lot 8060018 · 2022

LOT 8060018 SCREEN PRINTING & SOLDER PASTE

Screen Printer ITW EAE MOMENTUM II BTB







QUANTITY 1

YEAR 2022

SERIAL MM201099

Withdrawn

ITW EAE MOMENTUM II BTB Screen Printer, year 2022, serial MM201099. Weight 797 KG, voltage 200-240 V, 1~, 50/60 Hz, apparent power 2.4 KVA, full load current 10 A, largest single load 6 A, short circuit interrupt capacity 10 KA. Pneumatic supply 100/690 PSI/KPA, main circuit breaker 15 A, 10 kA, 120/240 V.

Used in: SMT Line 1 · Solder Paste Printing

Solder Paste Check-Right System Seilieco Corp. SCR-3100SLS · lot 8060054 · 2022

LOT 8060054 SCREEN PRINTING & SOLDER PASTE

Solder Paste Check-Right System Seilieco Corp. SCR-3100SLS







QUANTITY 1

YEAR 2022

SERIAL SCR10022203007

Withdrawn

Seilieco SCR-3100SLS Solder Paste Check-Right System, year 2022, serial SCR10022203007. Fitted with a touchscreen display, an integrated printer and ten numbered positions. Power input AC 220V 50/60Hz, weight 20kg, manufacturing date 2022.3.10, made in Korea.

Not placed in a production line

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

(2) Dispensing Controller BANSEOK TAD-200 · lot 8060055 · 2 units

LOT 8060055 SCREEN PRINTING & SOLDER PASTE

(2) Dispensing Controller BANSEOK TAD-200







QUANTITY
2

YEAR
—

SERIAL
—

Withdrawn

BANSEOK TAD-200 Dispensing Controller. Benchtop unit with time display, vacuum connection, pressure adjustment, air pressure gauge, interval control, time and shot keys and power switch. Rear panel with AC power inlet, Ext 1 control socket and air connection. Power AC220V, 110V, 50/60Hz.

Not placed in a production line

Solder Paste Thawing Unit SEILIECO CORP. SCR-3100CLS · lot 8060061 · 2021

LOT 8060061 SCREEN PRINTING & SOLDER PASTE

Solder Paste Thawing Unit SEILIECO CORP. SCR-3100CLS







QUANTITY
1

YEAR
2021

SERIAL
—

STATUS
Withdrawn

SEILIECO CORP. SCR-3100CLS Solder Paste Thawing Unit, year 2021. Bench-top unit with touchscreen display, integrated label printer and 10 numbered can positions in two rows. Power input AC 220V 50/60Hz, 10 can type, made in Korea.

Not placed in a production line

Flux Spray Machine KSM CO.,LTD KSM-500S · lot 8060075 · 2021



Not placed in a production line

Flux Spray Machine KSM CO.,LTD KSM-500S · lot 8060086 · 2022



Not placed in a production line

Metal Mask Cleaner JOEUN KISUL JK-MCN650SP-VD · lot 8060103 · 2021



Not placed in a production line

Screen Printer Samsung Techwin SP1 · lot 8060120



Used in: SMT Line 6 · Solder Paste Printing

Screen Printer Samsung Techwin SPI - C · lot 8060121 · 2014



Used in: SMT Line 2 · Solder Paste Printing

Screen Printer EKRA X5-Prof · lot 8060136 · 2012



Used in: SMT Line 4 · Solder Paste Printing

Screen Printer EKRA X5-Prof · lot 8060137 · 2012



Used in: SMT Line 5 · Solder Paste Printing

Screen Printer Samsung Techwin SPI - C · lot 8060140 · 2014



Used in: SMT Line 3 · Solder Paste Printing

Cell Dispensing Machine BOSUNG TECH BSDCD-100 · lot 8060392 · 2022



Not placed in a production line

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Inspection – SPI / AOI / Vision — 12 lots · 15 units

3D Inspection Machine KOH YOUNG TECHNOLOGY Inc. Meister-SV · lot 8060005



Used in: SMT Line 2 · Solder Paste Inspection (SPI)

3D Inspection Machine KOH YOUNG TECHNOLOGY Inc. Meister-SV · lot 8060020



Used in: SMT Line 3 · Solder Paste Inspection (SPI)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

Solder Paste Inspection Machine PARMI SPI HS60 · lot 8060043



Used in: SMT Line 4 · Solder Paste Inspection (SPI)

In-Line Vision Inspector MIRTEC MV-8VDH · lot 8060046 · 2010



Used in: SMT Line 1 · Automated Optical Inspection (AOI)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

Optical Inspection Machine Samsung MV-8VH · lot 8060089



Used in: SMT Line 4 · Automated Optical Inspection (AOI)

Inspection Machine PARMI SPI HS60 · lot 8060117 · 2009



Used in: SMT Line 1 · Solder Paste Inspection (SPI)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

In-Line Vision Inspector MIRTEC MV-8VH · lot 8060138 · 2010



Used in: SMT Line 2 · Automated Optical Inspection (AOI)

In-Line Vision Inspector MIRTEC MV-8VDH · lot 8060139 · 2010





Used in: SMT Line 3 · Automated Optical Inspection (AOI)


Microscope HiROX RX-100 · lot 8060147

LOT 8060147 INSPECTION – SPI / AOI / VISION

Microscope HiROX RX-100

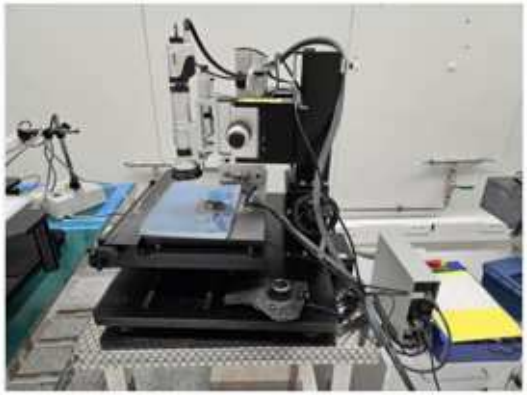





QUANTITY
1

YEAR
—

SERIAL
—

Withdrawn

HiROX RX-100 Microscope. Fitted with an HR-5000 lens, 20 - 5000x, and a light controller with a rated output of DC 15V / 15W, certification number KC2144006. Supplied with a Light Controller (KV-100NSR-1CH-VO), a control box , a control unit in a silver housing, a 3D mouse and a user manual.


Not placed in a production line

(2) Zoom Stereo Microscope Olympus SZ61 · lot 8060148 · 2 units

LOT 8060148 INSPECTION – SPI / AOI / VISION

(2) Zoom Stereo Microscope Olympus SZ61







QUANTITY
2

YEAR
—

SERIAL
—

Withdrawn

Olympus SZ61 Zoom Stereo Microscope. Zoom stereo microscope with binocular eyepieces and camera port on a boom stand with 8 Inch stage. Magnifier lamp input 100-240V(~) 50-60Hz 10W, LED light; supplied with Zootos HAWK-SCM63 cameras, Luna ring lights, Otsuka Optics SKK-B magnifier lamps and Zootos Leopard Image Analysis & Measurement Solution software cases.


Not placed in a production line

(3) Stereo Microscope Olympus SZ61 · lot 8060149 · 3 units

LOT 8060149 INSPECTION – SPI / AOI / VISION

(3) Stereo Microscope Olympus SZ61







QUANTITY
3

YEAR
—

SERIAL
—

STATUS
Withdrawn

Olympus SZ61 Stereo Microscope. Fitted with a trinocular head, camera port, boom stand and stage table, with WHSZ10X-H/22 eyepieces. Supplied with a Zootos HAWK-SCM63 camera, ring light, boom stand, magnifier lamp and aluminium sample holder.

Not placed in a production line

Black Color Inspector Vary Induced Technology Co., Ltd BCI-022 · lot 8060153 · 2022

LOT 8060153 INSPECTION – SPI / AOI / VISION

Black Color Inspector Vary Induced Technology Co., Ltd BCI-022







QUANTITY
1

YEAR
2022

SERIAL
S21177

STATUS
Withdrawn

Vary Induced Technology BCI-022 Black Color Inspector, year 2022, serial S21177. Supply 1 phase AC 220V, 50Hz, 20A; short circuit rating 2.5 KA; pneumatic 0.5 MPa; weight approx. 500 K. Supplied with a monitor with swing arm and a keyboard.

Not placed in a production line

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Reflow, Curing & Nitrogen — 14 lots · 14 units

Programmable Temperature Control System HEPHZIBAH CO.,LTD. HTC-1380 · lot 8060030

LOT 8060030 REFLOW, CURING & NITROGEN

Programmable Temperature Control System HEPHZIBAH CO.,LTD. HTC-1380







QUANTITY 1

YEAR —

SERIAL N12CUF

Withdrawn


Programmable Temperature Control System, HEPHZIBAH CO.,LTD. HTC-1380, serial N12CUF 00038. Power supply 230 V~, 50 Hz, 1 Ph, with power consumption of 1.9 kW and current consumption of 8.7 A. Cooling capacity 13,500 Btu/h, refrigerant R-410A 450 g, dimensions 497 x 610 x 965 mm, weight 67 kg. Supplied with a flexible air duct hose and a duct box.

Not placed in a production line

Forced Convection Oven LKLAB KOREA LO-FS250 · lot 8060051

LOT 8060051 REFLOW, CURING & NITROGEN

Forced Convection Oven LKLAB KOREA LO-FS250

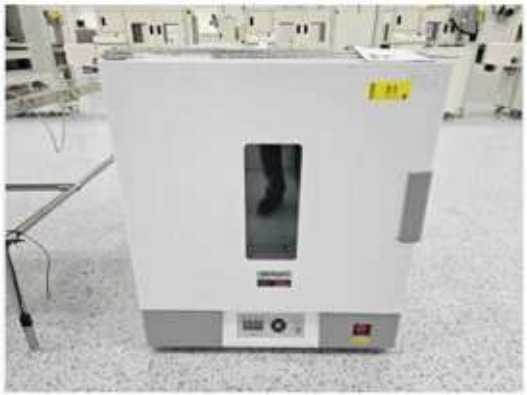





QUANTITY 1

YEAR —

SERIAL U080187

Withdrawn

LKLAB KOREA LO-FS250 Forced Convection Oven, serial U080187. Features PID control system, digital timer function, emergency stop button and over temperature safety dial scaled 0 °C to 320 °C, with an electrical rating of 220 Vac, 60 Hz, 11.9 A. Supplied with 2 wire shelves and 1 operating manual.

Not placed in a production line

Reflow Oven Heller Industries, Inc. 1910 DCO · lot 8060065 · 2012



Used in: SMT Line 2 · Reflow Soldering

Reflow Oven Heller 1910 DCO · lot 8060066 · 2012



Used in: SMT Line 3 · Reflow Soldering

Reflow Oven 1910 MK III · lot 8060067 · 2010

LOT 8060067 REFLOW, CURING & NITROGEN

Reflow Oven 1910 MK III







QUANTITY
1

YEAR
2010

SERIAL
—

Withdrawn

1910 MK III Reflow Oven. Long conveyor oven with hood, entry and exit conveyor sections, and an operator panel with emergency stop and reset button, key switches for hood, front and rear conveyor, and five thermocouple profile sockets. Housing marked "Lead Free Approved". Supplied with a monitor, keyboard, mouse and signal tower light.

Used in: SMT Line 4 · Reflow Soldering

Reflow Oven Samsung Techwin RF30103 · lot 8060068

LOT 8060068 REFLOW, CURING & NITROGEN

Reflow Oven Samsung Techwin RF30103







QUANTITY
1

YEAR
—

SERIAL
R1-A30-248-G5

Withdrawn

Samsung Techwin RF30103 Reflow Oven, serial R1-A30-248-G5. Fitted with a chain conveyor, exhaust ducts and thermocouple connections, with the housing marked "Air Solder" and a CE marking on the rating plate. Supplied with a Dell Optiplex 755 control PC, a monitor with mounting arm and a signal tower light.

Used in: SMT Line 5 · Reflow Soldering

Reflow Oven TSM TRN I-E123S-R · lot 8060078 · 2021



Used in: SMT Line 1 · Reflow Soldering

Nitrogen Generator TSM Co., Ltd. ESP-N25R · lot 8060082 · 2021



Not placed in a production line

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

Cure Oven Young Am Industrial Co.,Ltd YM-FD045050-2RH4Z0C · lot 8060095 · 2022

LOT 8060095 REFLOW, CURING & NITROGEN

Cure Oven Young Am Industrial Co.,Ltd YM-FD045050-2RH4Z0C







QUANTITY
1

YEAR
2022

SERIAL
YM-FD045050-2R

Withdrawn

Cure Oven, Young Am Industrial Co.,Ltd YM-FD045050-2RH4Z0C, year 2022, serial YM-FD045050-2RH4Z0C-211027-01. Plate designation "LED Underfill FIR OVEN 5M", continuous oven with chain conveyor, hinged chamber doors, exhaust connections, Mitsubishi Electric GOT2000 touch panel control and signal tower. Power 380V 4P 50Hz 30Kw, net weight 2,480kg.

Not placed in a production line

PSA Gas Generator TSM CO., LTD. ESP-N30R-99 · lot 8060133

LOT 8060133 REFLOW, CURING & NITROGEN

PSA Gas Generator TSM CO., LTD. ESP-N30R-99







QUANTITY
1

YEAR
—

SERIAL
—

Withdrawn

PSA Gas Generator, TSM CO., LTD. ESP-N30R-99. Rated at 30 m³/h capacity and 99.99 % purity, running on 220 VAC, with a touchscreen control panel, two pressure gauges, an emergency stop and a main switch, mounted on castors. Supplied with a hose set.

Not placed in a production line

Curing Oven YOUNG AM INDUSTRIAL CO.,LTD YM-FD045050-2RH4Z0C · lot 8060160 · 2022



Not placed in a production line

PSA Nitrogen Generator NAO TECH CO.,LTD NI10-4NC · lot 8060162 · 2022



Not placed in a production line

Curing Oven YOUNG AM INDUSTRIAL CO.,LTD YM-FD045050-2RH4Z0C · lot 8060166 · 2022

LOT 8060166 REFLOW, CURING & NITROGEN

Curing Oven YOUNG AM INDUSTRIAL CO.,LTD YM-FD045050-2RH4Z0C







QUANTITY
1

YEAR
2022

SERIAL
YM-FD045050-2R

Withdrawn

Curing Oven, YOUNG AM INDUSTRIAL CO.,LTD YM-FD045050-2RH4Z0C, year 2022, serial YM-FD045050-2RH4Z0C-211027-02. Plate designation LED Underfill FIR Oven 5M. Power 380V 4P 50Hz 30Kw, net weight 2,480 kg.

Not placed in a production line

Forced Convection Oven LKLAB KOREA Inc. LO-FS150 · lot 8060185

LOT 8060185 REFLOW, CURING & NITROGEN

Forced Convection Oven LKLAB KOREA Inc. LO-FS150







QUANTITY
1

YEAR
—

SERIAL
V110023

Withdrawn

LKLAB KOREA LO-FS150 Forced Convection Oven, serial V110023. Fitted with a PID control system, digital timer, over temperature safety dial (scale 0°C to 320°C), emergency stop button and a stainless steel chamber, and rated at 220 VAC, 60 Hz, 8.2A. Supplied with (3) wire shelves.

Not placed in a production line

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

PCB Handling – Conveyors, Loaders & Buffers — 80 lots · 82 units

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC · lot 8060004 · 2022




Not placed in a production line

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC-600SC · lot 8060006 · 2022



Not placed in a production line

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC-600SC · lot 8060007 · 2022

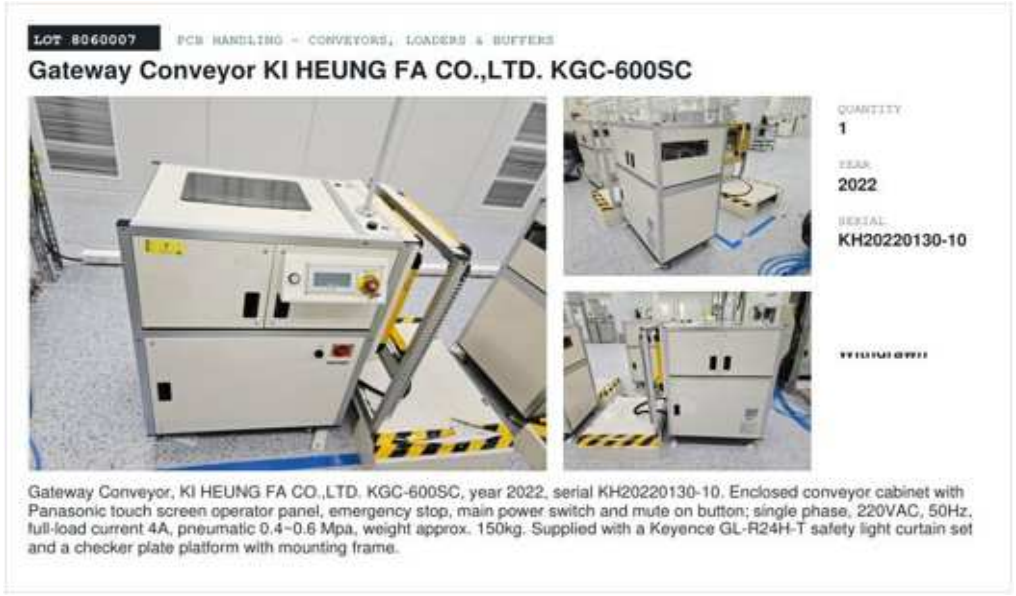

Not placed in a production line

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC-600SC · lot 8060008 · 2022



Not placed in a production line

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC-600SC · lot 8060009 · 2022



Not placed in a production line

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC-600SC · lot 8060010 · 2022




Not placed in a production line

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC-600SC · lot 8060011 · 2022



Not placed in a production line

Conveyor System Light Curtain · lot 8060012

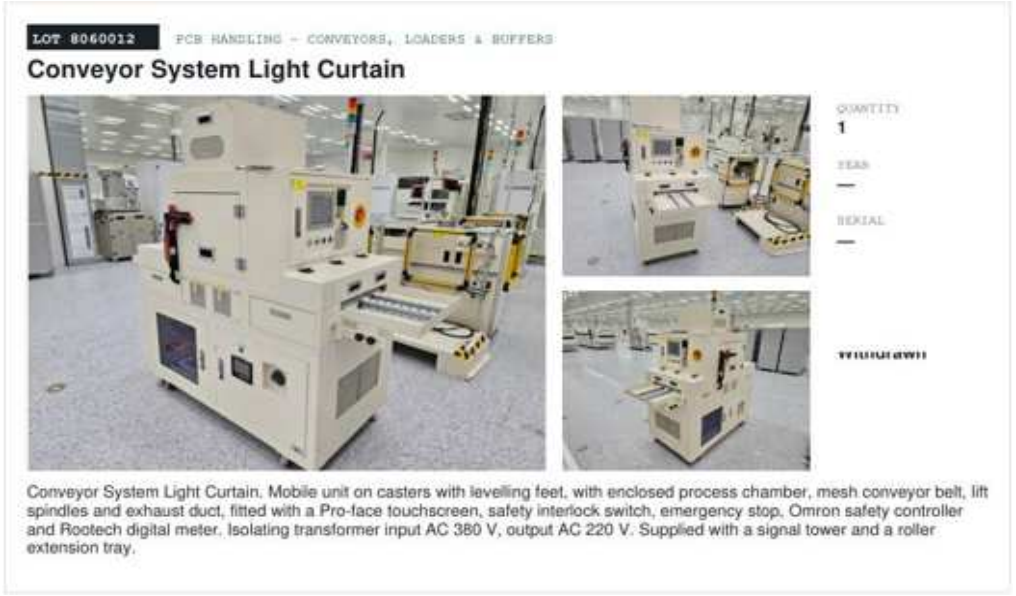

Not placed in a production line

Good NG Buffer KI HEUNG FA CO.,LTD. KGNB-900SC · lot 8060013 · 2022



Used in: SMT Line 1 · Good / NG Sorting

Vacuum Loader KI HEUNG FA CO.,LTD. KVL-900SC · lot 8060014 · 2022



Used in: SMT Line 1 · PCB Loading

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC · lot 8060019 · 2022



Not placed in a production line

Good NG Buffer KI HEUNG FA CO.,LTD. KGNB-900SC · lot 8060021 · 2022



Used in: SMT Line 2 · Good / NG Sorting

Shuttle Conveyor KI HEUNG FA CO.,LTD. KSC-6000SC · lot 8060022 · 2022

LOT 8060022 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Shuttle Conveyor KI HEUNG FA CO.,LTD. KSC-6000SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220620-6

Withdrawn

Shuttle Conveyor, KI HEUNG FA CO.,LTD. KSC-6000SC, year 2022, serial KH20220620-6. Weight 400kg, rated voltage single phase, 220VAC, rated frequency 50Hz, full-load current 4A, short-circuit rating 2.5kA. Control panel with master button, emergency stop with key, power indicator, main power switch and a Panasonic touch screen.

Not placed in a production line

Vacuum Loader KIHEUNG KVL-520-S · lot 8060023

LOT 8060023 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Vacuum Loader KIHEUNG KVL-520-S







QUANTITY
1

YEAR
—

SERIAL
KH20060419-15

STATUS
Withdrawn

KIHEUNG KVL-520-S Vacuum Loader, serial KH20060419-15. Fitted with a transparent cover, a control panel with emergency stop button and a pneumatic suction pick-up unit, and rated at 1ph 220V-50Hz. Customer label reads 1 by 1 Transfer.

Not placed in a production line

Magazine Loader KI HEUNG KFL-900SC · lot 8060024

LOT 8060024 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Magazine Loader KI HEUNG KFL-900SC







QUANTITY
1

YEAR
—

SERIAL
KH20240516-2

STATUS
Withdrawn

KI HEUNG KFL-900SC Magazine Loader, serial KH20240516-2. Rated at 1 Phase, 230V, 50 Hz, with an air supply of 5~6Bar (5~6 Kgf/Cm²). Supplied with a signal tower light and a Keyence safety light curtain.

Not placed in a production line

Magazine Loader KI HEUNG FA CO., LTD. KFL-900SC · lot 8060025 · 2022

LOT 8060025 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Magazine Loader KI HEUNG FA CO., LTD. KFL-900SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220130-21

Withdrawn

Magazine Loader, KI HEUNG FA CO., LTD. KFL-900SC, year 2022, serial KH20220130-21. Weight 240kg, rated voltage single phase, 220VAC, full-load current 4A, rated frequency 50Hz and pneumatic 0.4~0.6 Mpa, with a Panasonic touch screen operator panel. Supplied with a Keyence safety light curtain.

Used in: SMT Line 2 · PCB Loading

Magazine Unloader KI HEUNG FA CO., LTD. KFU-900SC · lot 8060026 · 2022



Used in: SMT Line 1 · PCB Unloading

Connecting Conveyor KI HEUNG FACTORY AUTOMATION CO.LTD KCC-600SC · lot 8060027



Not placed in a production line

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC · lot 8060028 · 2022



Not placed in a production line

Vacuum Loader KI HEUNG FA CO.,LTD. KVL-900SC · lot 8060029 · 2022



Used in: SMT Line 3 · PCB Loading

Magazine Unloader KI HEUNG FA CO.,LTD. KFU-900SC · lot 8060031 · 2022



Used in: SMT Line 2 · PCB Unloading

Magazine Unloader KIHEUNG FA CO.,LTD. KFU-900SC · lot 8060032



Not placed in a production line

Magazine Unloader KI HEUNG FA CO.,LTD. KFU-900SC · lot 8060033 · 2022



Used in: SMT Line 3 · PCB Unloading

Magazine Unloader KI HEUNG FA CO.,LTD. KFU-900SC · lot 8060034 · 2022



Used in: SMT Line 4 · PCB Unloading

Magazine Unloader KI HEUNG FA CO.,LTD. KFU-900SC · lot 8060035 · 2022



Used in: SMT Line 5 · PCB Unloading

Magazine Loader KI HEUNG FA CO.,LTD. KFL-900SC · lot 8060036 · 2022



Used in: SMT Line 4 · PCB Loading

Magazine Loader KI HEUNG FA CO.,LTD. KFL-900SC · lot 8060037 · 2022



Used in: SMT Line 5 · PCB Loading

Magazine Loader KI HEUNG FA CO.,LTD. KFL-900SC · lot 8060038 · 2022



Used in: SMT Line 6 · PCB Loading

Inverter Flip Station KI HEUNG FA CO., LTD. KIV-420SA · lot 8060039 · 2022



Used in: SMT Line 2 · Board Flip (Double-Sided)

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC · lot 8060041 · 2022



Not placed in a production line

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC · lot 8060042 · 2022

LOT 8060042 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220314-1

STATUS
Withdrawn

Connection Conveyor, KI HEUNG FA CO.,LTD. KCC-600SC, year 2022, serial KH20220314-1. Weight 90kg, rated voltage single phase, 220VAC at 50Hz, full-load current 2A, short-circuit rating 2.5kA, pneumatic pressure 0.4~0.6 Mpa.

Not placed in a production line

Buffer Conveyor KI HEUNG FA CO.,LTD. KGNB-900SC · lot 8060044 · 2022

LOT 8060044 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Buffer Conveyor KI HEUNG FA CO.,LTD. KGNB-900SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220130-6

STATUS
Withdrawn

Buffer Conveyor, KI HEUNG FA CO.,LTD. KGNB-900SC, year 2022, serial KH20220130-6. Weight approx. 230kg, rated voltage single phase, 220VAC, full-load current 4A, rated frequency 50Hz, pneumatic 0.4~0.6 Mpa. Control panel with Panasonic touch display and light curtains. Supplied with a monitor swivel arm and a signal light tower.

Not placed in a production line

Gate Conveyor KI HEUNG FA CO.,LTD. KGC-500S · lot 8060045

LOT 8060045 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Gate Conveyor KI HEUNG FA CO.,LTD. KGC-500S







QUANTITY
1

YEAR
—

SERIAL
KH20060519-29

Withdrawn

Gate Conveyor, KI HEUNG FA CO.,LTD. KGC-500S, serial KH20060519-29. Mobile cabinet on castors with a control panel and an emergency stop button, rated 1~ 220 V, 50 Hz. Asset label reads Samsung Electronics Slovakia (SESK), Gate Conveyor, 1 by 1 transfer.

Not placed in a production line

NG Buffer System KIHEUNG FA CO.,LTD. KGNB-900S · lot 8060047

LOT 8060047 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

NG Buffer System KIHEUNG FA CO.,LTD. KGNB-900S







QUANTITY
1

YEAR
—

SERIAL
KH20100120-2

STATUS
Withdrawn

NG Buffer System, KIHEUNG FA CO.,LTD. KGNB-900S, serial KH20100120-2. Single-phase supply at 1ph 220 V, 50 Hz, with 1 by 1 transfer. Fitted with an Operator Panel GP-2480 with Emergency Stop.

Used in: SMT Line 5 · Good / NG Sorting

Magazine Loader KI HEUNG FA CO.,LTD. KFL-900SC · lot 8060063 · 2022



Not placed in a production line

Belt Buffer KI HEUNG FA CO.,LTD. KBB-900SC · lot 8060069 · 2022



Not placed in a production line

Shuttle Conveyor KI HEUNG FA CO.,LTD. KSC-6000SC · lot 8060070 · 2022



Not placed in a production line

Belt Buffer KIHEUNG KBB-900SC · lot 8060071 · 2022



Not placed in a production line

Weight Measurement Buffer Conveyor Samsung plant - The Wall · lot 8060074 · 2021



Not placed in a production line

Weight Measurement Buffer Conveyor CNT CO., LTD plant - The Wall · lot 8060076 · 2021



Not placed in a production line

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC · lot 8060077 · 2022

LOT 8060077 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220130-4

STATUS
Withdrawn

Connection Conveyor, KI HEUNG FA CO.,LTD. KCC-600SC, year 2022, serial KH20220130-4. Weight 90kg, rated voltage single phase, 220VAC, rated frequency 50Hz, full-load current 2A, short-circuit rating 2.5kA, pneumatic 0.4-0.6 Mpa.

Not placed in a production line

Shuttle Conveyor KI HEUNG FA CO.,LTD. KSC-6000SC · lot 8060079 · 2022

LOT 8060079 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Shuttle Conveyor KI HEUNG FA CO.,LTD. KSC-6000SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220620-7

STATUS
Withdrawn

Shuttle Conveyor, KI HEUNG FA CO.,LTD. KSC-6000SC, year 2022, serial KH20220620-7. Multi-section design with glass-covered sections, an operator panel (Panasonic touch display, emergency stop, master button) and a main power switch. Weight 400kg; rated voltage single phase, 220VAC; full-load current 4A; short-circuit rating 2.5kA; rated frequency 50Hz.

Not placed in a production line

Cooling Belt Buffer KI HEUNG FA CO., LTD. KCBB-900SC · lot 8060080 · 2022



Used in: SMT Line 1 · Post-Reflow Cooling

Magazine Unloader KI HEUNG FA CO.,LTD. KFU-900SC · lot 8060081 · 2022



Used in: SMT Line 6 · PCB Unloading

Buffer Conveyor CNT CO., LTD plant - The Wall · lot 8060085 · 2022



Not placed in a production line

Weight Measurement Buffer Conveyor CNT CO., LTD plant - The Wall · lot 8060087 · 2022



Not placed in a production line

Connection Conveyor KI HEUNG FA CO.,LTD. KCC-600SC · lot 8060088 · 2022



Not placed in a production line

Cooling Belt Buffer KI HEUNG FA CO.,LTD. KCBB-900SC · lot 8060090 · 2022



Used in: SMT Line 2 · Post-Reflow Cooling

Cooling Belt Buffer KI HEUNG FA CO.,LTD. KCBB-900SC · lot 8060091 · 2022



Used in: SMT Line 3 · Post-Reflow Cooling

Invert Flip Station KIHEUNG FA CO., LTD. KIV-420C · lot 8060092 · 2025



Used in: SMT Line 1 · Board Flip (Double-Sided)

Connecting Conveyor Kiheung FA Co., Ltd. KCC-600SC · lot 8060093 · 2025



Not placed in a production line

Belt Buffer KI HEUNG FA CO.,LTD. KBB-900SC · lot 8060094 · 2022



Not placed in a production line

Connecting Conveyor KIHEUNG FA CO., LTD. KCC-600SC · lot 8060096



Not placed in a production line

Invert Flip Station KI HEUNG FA CO.,LTD. KIV-420SA · lot 8060097 · 2022



Used in: SMT Line 3 · Board Flip (Double-Sided)

Magazine Unloader KI HEUNG FA CO.,LTD. KFU-900SC · lot 8060098 · 2022



Not placed in a production line

Vacuum Loader KI HEUNG FA CO., LTD. KVL-900SC · lot 8060099 · 2022



Not placed in a production line

Vacuum Unloader KI HEUNG FA CO.,LTD. KVU-520SA · lot 8060101 · 2022

LOT 8060101 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Vacuum Unloader KI HEUNG FA CO.,LTD. KVU-520SA







QUANTITY
1

YEAR
2022

SERIAL
KH20220130-28

STATUS
Withdrawn

Vacuum Unloader, KI HEUNG FA CO.,LTD. KVU-520SA, year 2022, serial KH20220130-28. Weight 230 kg, rated voltage single phase 220 VAC at 50 Hz, full-load current 2 A, short-circuit rating 2.5 kA, pneumatic pressure 0.4~0.6 Mpa.

Not placed in a production line

Unloader KI HEUNG KDUSVP-900SA · lot 8060112

LOT 8060112 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Unloader KI HEUNG KDUSVP-900SA







QUANTITY
1

YEAR
—

SERIAL
—

STATUS
Withdrawn

KI HEUNG KDUSVP-900SA Unloader. Fitted with two-level conveyor lanes and a touch screen control panel with power switch, emergency stop and buzzer. Panels are marked S10 Front and S10 Rear. Supplied with a signal tower light.

Not placed in a production line

Dual Cooling Belt Buffer KI HEUNG FA CO., LTD. KDCBB-900SC · lot 8060114 · 2022



Used in: SMT Line 4 · Post-Reflow Cooling

Dual Shuttle Conveyor KI HEUNG FA CO.,LTD. KDSC-500SC · lot 8060115 · 2022



Not placed in a production line

Conveyor KIHEUNG KCBB-900S · lot 8060116

LOT 8060116 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Conveyor KIHEUNG KCBB-900S







QUANTITY
1

YEAR
—

SERIAL
—

STATUS
Withdrawn

KIHEUNG KCBB-900S Conveyor. Floor-standing unit with an aluminium profile frame, internal belt conveyor sections, a touch panel, an emergency stop button and four ventilation fans on top. Equipment ID Q230-025024-003.

Not placed in a production line

Dual Connecting Conveyor KI HEUNG FA CO.,LTD. KDCC-600SC · lot 8060118 · 2022

LOT 8060118 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Dual Connecting Conveyor KI HEUNG FA CO.,LTD. KDCC-600SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220820-6

Withdrawn

Dual Connecting Conveyor, KI HEUNG FA CO.,LTD. KDCC-600SC, year 2022, serial KH20220820-6. Weight approx. 150kg, rated voltage single phase 220VAC, full-load current 8A, rated frequency 50Hz, pneumatic 0.4~0.6 Mpa, with a Panasonic operator panel, emergency stop and main power switch. Supplied with (2) Signal Tower.

Not placed in a production line

(2) Dual Rail SMT Line Conveyor Morel Equipments Co.,Ltd. DC-M-N · lot 8060119 · 2019 · 2 units



Not placed in a production line

(2) Unloader Conveyor KIHEUNG FA CO.,LTD. KDUSVP-900SA · lot 8060125 · 2 units




Not placed in a production line

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC - 500-S · lot 8060126

LOT 8060126 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Gateway Conveyor KI HEUNG FA CO.,LTD. KGC - 500-S







QUANTITY
1

YEAR
—

SERIAL
KH20060306

STATUS
Withdrawn

Gateway Conveyor, KI HEUNG FA CO.,LTD. KGC - 500-S, serial KH20060306 -5. Plate designation Gate Way S/V. Voltage 1ph 220V-50Hz. Control panel with push buttons for Conv, For, Rev, Power, Auto/Manual, Start/Reset and Emergency Stop.

Not placed in a production line

Conveyor KIHEUNG FA CO.,LTD. KDLSVL-900SA · lot 8060127

LOT 8060127 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Conveyor KIHEUNG FA CO.,LTD. KDLSVL-900SA







QUANTITY
1

YEAR
—

SERIAL
—

Withdrawn

Conveyor, KIHEUNG FA CO.,LTD. KDLSVL-900SA. Fitted as a cabinet unit with touch panel, emergency stop, power switch and buzzer, rated 1ph 220V 50HZ, with the plate name Dual Multi L/D and equipment ID O230-030543-022. Supplied with a signal tower.

Not placed in a production line

Dual Connecting Conveyor KI HEUNG FA CO.,LTD. KDCC-600SC · lot 8060128 · 2022



Not placed in a production line

PCB Buffer Unit Famecs FRNB-800AA-11PRE-SV · lot 8060129



Not placed in a production line

Shuttle Conveyor Samsung Techwin FSC-400AS-HSE-V1 · lot 8060130



Not placed in a production line

Conveyor Samsung Techwin FSC-400AS-HSE-V1 · lot 8060131



Not placed in a production line

Dual Cooling Conveyor KI HEUNG FA CO.,LTD. KDHC-1800SC · lot 8060132 · 2022



Used in: SMT Line 5 · Post-Reflow Cooling

NG Buffer Stocker Famecs FRNB-750SA-8E-SV · lot 8060141



Used in: SMT Line 6 · Good / NG Sorting

NG Buffer KIHEUNG FA CO.,LTD. KGNB-900S · lot 8060142

LOT 8060142 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

NG Buffer KIHEUNG FA CO.,LTD. KGNB-900S







QUANTITY
1

YEAR
—

SERIAL
KH20100120-5

STATUS
Withdrawn

NG Buffer, KIHEUNG FA CO.,LTD. KGNB-900S, serial KH20100120-5. Rated at 1 ph 220 V, 50 Hz. Supplied with a Dell monitor, a keyboard, a mouse and a signal tower light.

Not placed in a production line

Magazine Loader KI HEUNG FA CO., LTD. KFL-900SC · lot 8060157 · 2022

LOT 8060157 PCB HANDLING – CONVEYORS, LOADERS & BUFFERS

Magazine Loader KI HEUNG FA CO., LTD. KFL-900SC







QUANTITY
1

YEAR
2022

SERIAL
KH20220130-23

Withdrawn

Magazine Loader, KI HEUNG FA CO., LTD. KFL-900SC, year 2022, serial KH20220130-23. Fitted with a Panasonic operator panel, weighing approx. 260kg, rated at single phase, 220VAC, 50Hz with a full-load current of 4A and a short-circuit rating of 2.5kA. Pneumatic supply 0.4~0.6 Mpa.

Not placed in a production line

Cooling Conveyor KI HEUNG FA CO.,LTD. KHC-1800SC · lot 8060159 · 2022



Used in: SMT Line 6 · Post-Reflow Cooling

Good NG Buffer KIHEUNG KGNB-900SC · lot 8060161 · 2022



Used in: SMT Line 3 · Good / NG Sorting

Magazine Loader KI HEUNG FA CO.,LTD. KFL-900SC · lot 8060163 · 2022



Not placed in a production line

Cooling Conveyor KI HEUNG FA CO.,LTD. KHC-1800SC · lot 8060165 · 2022



Not placed in a production line

Good NG Buffer KI HEUNG FA CO.,LTD. KGNB-900SC · lot 8060167 · 2022



Used in: SMT Line 4 · Good / NG Sorting

Magazine Loader KI HEUNG FA CO.,LTD. KFL-900SC · lot 8060182 · 2022



Not placed in a production line

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Marking, Cleaning & Surface Prep — 13 lots · 13 units

Laser Marking System STS Co., Ltd. LM-1300G · lot 8060001

LOT 8060001 MARKING, CLEANING & SURFACE PREP

Laser Marking System STS Co., Ltd. LM-1300G







QUANTITY
1

YEAR
—

SERIAL
LM-130G-088-B1

Withdrawn

EXPORT
End-User

STS LM-1300G Laser Marking System, serial LM-130G-088-B1. Enclosed unit with laser scan head, camera, conveyor, Euchner safety switch and RS Automation servo drives, weighing approx. 1000 kg, rated 1 KVA(RMS) at 220 VAC, 50~60 Hz. Supplied with a Han's Laser Draco Series laser power supply, an Advantech IPC-510 industrial computer and a keyboard.

Used in: SMT Line 1 · Laser Marking

PCB Particle Cleaner GSI Co., Ltd. F077-02 · lot 8060002 · 2022

LOT 8060002 MARKING, CLEANING & SURFACE PREP

PCB Particle Cleaner GSI Co., Ltd. F077-02







QUANTITY
1

YEAR
2022

SERIAL
F077-02-001

Withdrawn

GSI F077-02 PCB Particle Cleaner, year 2022, serial F077-02-001. Power is 1 phase, 208 VAC, 50~60 HZ, 3.3 KVA, with a short circuit rating of 5 kA and pneumatic 5 kgf/cm^2. Size approx. 580 (W) x 800 (L) x 1700 (H) mm, weight approx. 120 Kg. Supplied with a Weintek touch screen operator panel and a signal tower.

Used in: SMT Line 1 · PCB Cleaning

Plasma Cleaner MAK Co.,Ltd. MAK-SFNP-09 · lot 8060003 · 2025



Used in: SMT Line 4 · PCB Cleaning

Laser Marking System STS LM - 1300G · lot 8060015



Used in: SMT Line 2 · Laser Marking

PCB Particle Cleaner GSI F077-02 · lot 8060016 · 2022



Used in: SMT Line 2 · PCB Cleaning

Plasma Machine MAK Co.,Ltd. MAK-SFNP-09 · lot 8060017 · 2025



Used in: SMT Line 5 · PCB Cleaning

PCB Cleaning Conveyor KI HEUNG FA CO.,LTD. KIPC-900SC · lot 8060040 · 2022



Used in: SMT Line 3 · PCB Cleaning

COB Remover ims LCOB-RM20 · lot 8060072 · 2022



Not placed in a production line

Solder Removal and Dotting Machine KOSES KSR-500D · lot 8060073 · 2022

LOT 8060073 MARKING, CLEANING & SURFACE PREP

Solder Removal and Dotting Machine KOSES KSR-500D







QUANTITY
1

YEAR
2022

SERIAL
89-22-0009

Withdrawn

KOSES KSR-500D Solder Removal and Dotting Machine, year 2022, serial 89-22-0009. Electrical 380 V, 50/60 Hz, circuit breaker EBS53c 50 A; weight approx. 1,800 kg; size approx. W1,400 x D1,800 x H1,760 mm; Raylase laser scanner head, wavelength 1064 nm. Supplied with a KOSES handheld manual pendant, a signal tower, two monitors and an ADLINK industrial PC.

Not placed in a production line

COB Remover ims LCOB-RM20 · lot 8060083 · 2022

LOT 8060083 MARKING, CLEANING & SURFACE PREP

COB Remover ims LCOB-RM20







QUANTITY
1

YEAR
2022

SERIAL
LCOB-RM20-012

Withdrawn

ims LCOB-RM20 COB Remover, year 2022, serial LCOB-RM20-012. Supply 1 Phase 220 V, 50/60 Hz, 15 A, SCCR 25 kA, pneumatic 0.4 ~ 0.6 MPa. Supplied with a Fan Filter Unit (ICU-BL400S), a Newsync monitor, a signal tower and an SMC air filter unit.

Not placed in a production line

Solder Remove & Dotting Machine KOSES KSR-500D · lot 8060084 · 2022

LOT 8060084 MARKING, CLEANING & SURFACE PREP

Solder Remove & Dotting Machine KOSES KSR-500D







QUANTITY
1

YEAR
2022

SERIAL
89-22-0046

KOSES KSR-500D Solder Remove & Dotting Machine, year 2022, serial 89-22-0046. Electrical supply 380V 50/60Hz, 3 wires + 1PE, with compressed air at 5Kgf/Cm²; weight approx. 1,800 kg, dimensions approx. W1,400 x D1,800 x H1,760 mm; laser wavelength 1064nm. Supplied with a Raylase laser scanner head, handheld controller, signal tower, two monitors, two industrial PCs and a transformer.

Not placed in a production line

Laser Marker STS LM - 1300G · lot 8060100

LOT 8060100 MARKING, CLEANING & SURFACE PREP

Laser Marker STS LM - 1300G







QUANTITY
1

YEAR
—

SERIAL
LM-130G-095-B6

STS LM - 1300G Laser Marker, serial LM-130G-095-B6. Fitted with a scan head, camera, conveyor section, extraction hose, safety interlock and a pneumatic service unit in the lower cabinet; weight 1000kg, rating 1 KVA(RMS), 50~60 Hz, input voltage 220 VAC. Supplied with a Han's Laser Draco Series laser power supply, an Advantech IPC-510 industrial computer, keyboard with mouse and a signal tower light.

Used in: SMT Line 3 · Laser Marking

N2 Plasma Machine MAK Co.,Ltd. MAK-SFNP-06 · lot 8060168 · 2022



Used in: SMT Line 6 · PCB Cleaning

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Programming & Electrical Test — 15 lots · 15 units

Electric Tester Na & Na Co.,Ltd ECT-SMD-303 · lot 8060109 · 2022



Not placed in a production line

Automatic Programming Handler COMPASS SYSTEMS Inc. AUTOPRO-1203T · lot 8060110 · 2007



Not placed in a production line

ROM Writer Compass Systems Inc. AutoPro-1203TL · lot 8060111 · 2012

LOT 8060111 PROGRAMMING & ELECTRICAL TEST

ROM Writer Compass Systems Inc. AutoPro-1203TL







QUANTITY
1

YEAR
2012

SERIAL
CSA

STATUS
Withdrawn

Compass Systems AutoPro-1203TL ROM Writer, year 2012, serial CSA - 1203TL - 048. Power AC220V, 60Hz, with an air pressure of 5kg/cm². Made in Korea. Supplied with a monitor.

Not placed in a production line

IC Programming System Compass Systems AutoPro-1203TL · lot 8060113 · 2012

LOT 8060113 PROGRAMMING & ELECTRICAL TEST

IC Programming System Compass Systems AutoPro-1203TL







QUANTITY
1

YEAR
2012

SERIAL
CSA

Withdrawn

Compass Systems AutoPro-1203TL IC Programming System, year 2012, serial CSA - 1203TL - 049. Power AC220V, 60Hz, with air pressure of 5kg/cm². Side loading and unloading station for Programmed IC and Empty IC, maximum 10 trays, with Start, Stop, Reset and Cycle Stop buttons and an emergency stop. Supplied with a monitor.

Not placed in a production line

Automatic Programming Handler Compass Systems AUTOPRO - 1203TL · lot 8060122 · 2010



Not placed in a production line

Automated Programming System Compass Systems AUTOMAX - 3200Plus · lot 8060134 · 2014




Not placed in a production line

Automated Programming System COMPASS SYSTEMS Inc. AUTOMAX-3200Plus · lot 8060135 · 2014



Not placed in a production line

LED Module Inspection Rack Na & Na Co.,Ltd ECT-OFF-303 · lot 8060150 · 2022

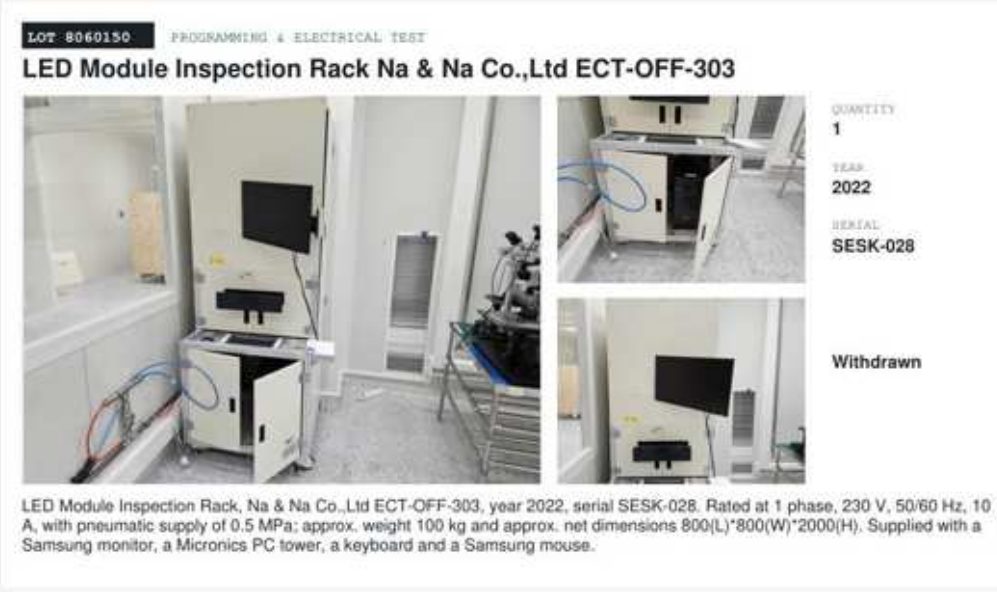

Not placed in a production line

In-Line Electric Tester Na & Na Co.,Ltd ECT-M0-303 · lot 8060151 · 2022



Not placed in a production line

Automated inline Inspection and Test Station for Electronic Modules · lot 8060158



Used in: SMT Line 5 · Automated Optical Inspection (AOI)

Visual Tester Na & Na Co.,Ltd ECT-VI-303 · lot 8060164 · 2022



Not placed in a production line

Electric Tester Na & Na Co.,Ltd ECT-CU-303 · lot 8060177 · 2022



Not placed in a production line

Electric Tester Na & Na Co.,Ltd ECT-CU-303 · lot 8060178 · 2022



Not placed in a production line

Auto PCB Stacker Na & Na Co.,Ltd ECT-ST-303 · lot 8060179 · 2022



Not placed in a production line

Production High-Speed Programmer Compass Systems, Inc. FPS16SYSTEM · lot 8060296



Not placed in a production line

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Rework & Repair — 7 lots · 7 units

Rework System DEN-ON INSTRUMENTS CO., LTD. RD-500S III · lot 8060049

LOT 8060049 REWORK & REPAIR

Rework System DEN-ON INSTRUMENTS CO., LTD. RD-500S III







QUANTITY 1

YEAR —

SERIAL R5151A1012

Withdrawn

Rework System, DEN-ON INSTRUMENTS CO., LTD. RD-500S III, serial R5151A1012. Rework system rated at AC 200-240 V, 50/60 Hz, 1.4 KW; system controller rated at AC 100-240 V, 50/60 Hz, 20 W. Supplied with a Den-On Instruments PC-500 system controller, an iiyama ProLite E1780SD monitor and a CKD air regulator with pressure gauge.

Not placed in a production line

BGA Rework System KUKJETRADING CO., LTD. TR3000-IRV · lot 8060052 · 2022

LOT 8060052 REWORK & REPAIR

BGA Rework System KUKJETRADING CO., LTD. TR3000-IRV







QUANTITY 1

YEAR 2022

SERIAL 20220102

Withdrawn

BGA Rework System, KUKJETRADING CO., LTD. TR3000-IRV, year 2022, serial 20220102. Power AC220V, 25A, 1PH, with an integrated monitor, touch screen control panel and emergency stop button. Supplied with a Samsung monitor, a monitor arm, a hand control unit and an exhaust hose.

Not placed in a production line

Smart Rework System KUKJETRADING CO., LTD. TR3000-HAV · lot 8060053 · 2023



Not placed in a production line

BGA Rework System KUKJETRADING CO., LTD. TR3000-IRV · lot 8060058 · 2022



Not placed in a production line

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

BGA Reballing Kit WON-TECH Co., BRK-2001 · lot 8060287

LOT 8060287 REWORK & REPAIR

BGA Reballing Kit WON-TECH Co., BRK-2001







QUANTITY
1

YEAR
—

SERIAL
—

STATUS
Withdrawn

WON-TECH BRK-2001 BGA Reballing Kit. Adjustable BGA component reballing fixture in an aluminium-framed carrying case with foam inserts. Supplied with a reballing fixture with micrometer, tweezers, a brush and a manual.

Not placed in a production line

TAB&PCB; Rework Machine Fine Technology TP/RW-60 · lot 8060393 · 2012

LOT 8060393 REWORK & REPAIR

TAB&PCB Rework Machine Fine Technology TP/RW-60







QUANTITY
1

YEAR
2012


SERIAL
1211-TP/RW-60

Withdrawn

Fine Technology TP/RW-60 TAB&PCB Rework Machine, year 2012, serial 1211-TP/RW-60. Size 4000(L)x2070(W)x1850(H), 3Phase 30A 10KVA, dry air 4~6Kg/cm2. Pro-face touch screen control panel, Omron temperature controllers, Mitsubishi PLC and servo drives, two heated tab heads with tape reels. Supplied with (2) Monitors.

Not placed in a production line

Soldering Stations, Tripods, Stereo Microscope, Sander and Tools Manfrotto, Scheppach and more · lot 8060539

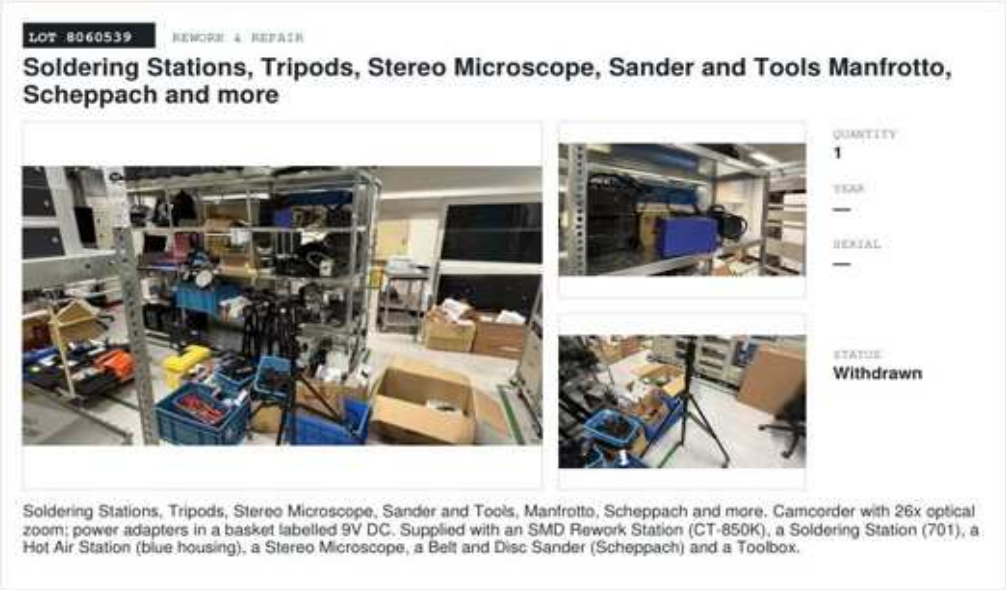

Not placed in a production line

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Depaneling (CNC PCB Cutting) — 2 lots · 2 units

CNC Machining Center HWACHEON HIT-400L (PCB CUTTING) · lot 8060180 · 2022



Not placed in a production line

CNC Machining Center Hwacheon HIT-400L · lot 8060181 · 2022



Not placed in a production line

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

LED Module Encapsulation — 3 lots · 3 units

Autoclave SHINDO ENG. LAB., LTD. SDAC-SEC03 · lot 8060152 · 2022

LOT 8060152 LED MODULE ENCAPSULATION

Autoclave SHINDO ENG. LAB., LTD. SDAC-SEC03







QUANTITY 1

YEAR 2022

SERIAL SDAC-SEC03-01

Withdrawn


Autoclave, SHINDO ENG. LAB., LTD. SDAC-SEC03, year 2022, serial SDAC-SEC03-01. Temperature 100° C, pressure 9 bar, front loading chamber with SICK light curtain, Pro-face touch screen, Yokogawa pressure controller and Autonics temperature controller. Rated 380VAC, 3 phase, 50Hz / 60Hz, 30 A; gross weight 1,500 Kg. Supplied with (2) signal towers.

Not placed in a production line

UV Molding Machine SHINDO ENG. LAB., LTD. · lot 8060154 · 2022

LOT 8060154 LED MODULE ENCAPSULATION

UV Molding Machine SHINDO ENG. LAB., LTD.

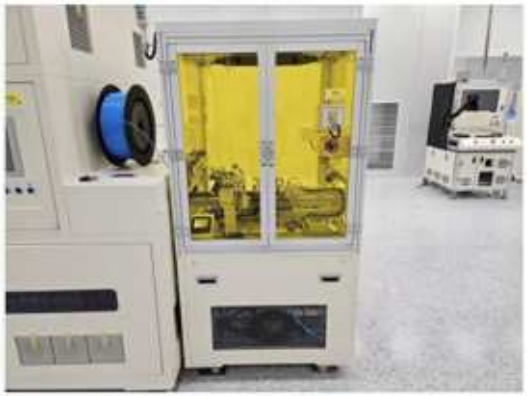





QUANTITY 1

YEAR 2022

SERIAL —

Withdrawn

UV Molding Machine, SHINDO ENG. LAB., LTD., year 2022. Rated at 380VAC, 3phase, 60Hz, with a rated current of 60 A and a gross weight of 7500 Kg. Enclosed unit with yellow-tinted safety glazing, linear axes and handling stages, a touchscreen panel, a LOTO key switch (Safety Mode Auto/Teach) and an Emergency Stop button.

Not placed in a production line

UV Molding Machine SHINDO ENG. LAB., LTD. SDUVM-SEC03A · lot 8060156 · 2022




Not placed in a production line

ELECTRONICS & DISPLAY PLANT · SMT / PCB EQUIPMENT CATALOGUE

Material Storage & Line Support — 18 lots · 82 units

Upright Freezer UDScientific UD-30L500 · lot 8060048 · 2022

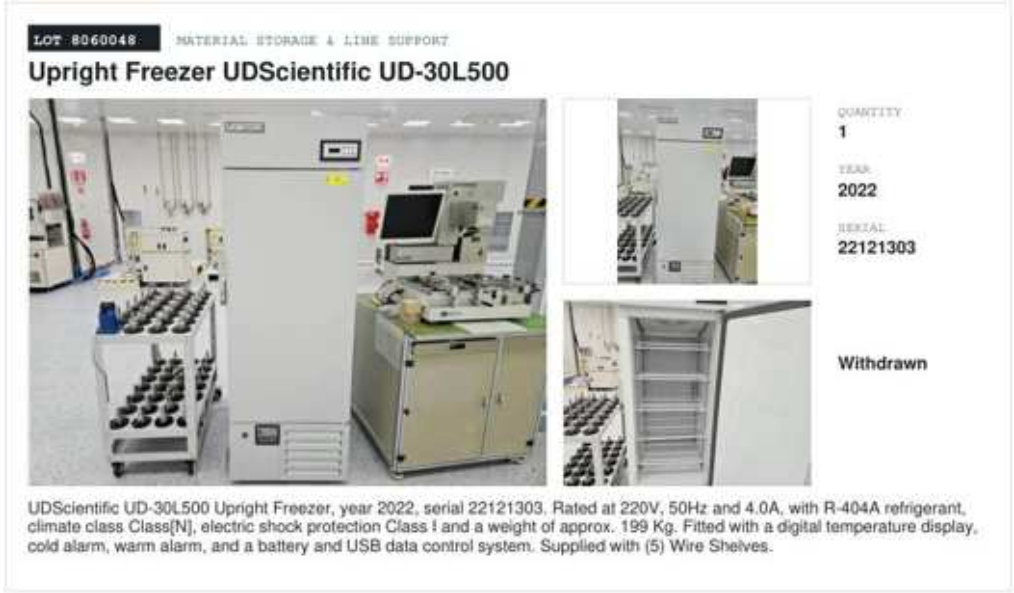

Not placed in a production line

Nozzle Cleaner BOSUNG ENG Co.,Ltd ENC - 24SN · lot 8060060 · 2022



Not placed in a production line


Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

SMT Splicing Device M.O.A Co., Ltd. · lot 8060064



Not placed in a production line

(10) SMT SPLICING DEVICE · lot 8060123 · 10 units

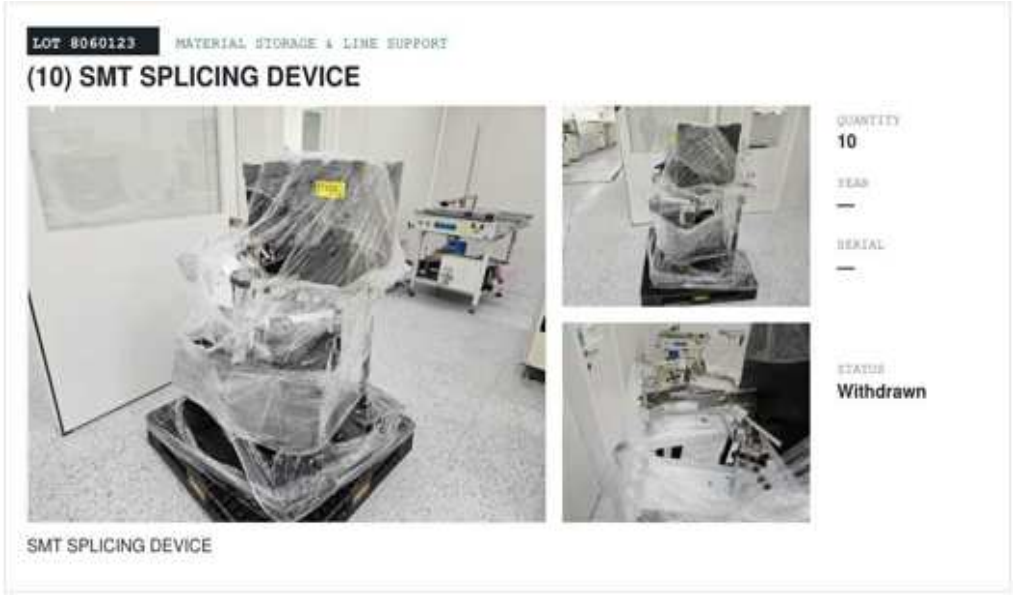

Not placed in a production line

(2) Nozzle Cleaner BOSUNG ENG Co.,Ltd ENC-24SN · lot 8060124 · 2023 · 2 units



Not placed in a production line

Vision Inspection Tool BOSUNG ENG Co.,Ltd ENI-12AP · lot 8060145 · 2022



Not placed in a production line

Upright Freezer UDScientific UD-30L500 · lot 8060169 · 2022

LOT 8060169 MATERIAL STORAGE & LINE SUPPORT

Upright Freezer UDScientific UD-30L500







QUANTITY
1

YEAR
2022

SERIAL
22121302

Withdrawn

UDScientific UD-30L500 Upright Freezer, year 2022, serial 22121302. Frost-free with a digital control panel, rated at 220V, 50Hz and 4.0A, with R-404A refrigerant, climate class Class(N) and a weight of 199 Kg. A Samsung Electronics Slovakia asset label names it Bio Freezer UD-30L500D.

Not placed in a production line

(5) Dry Cabinet SEILIECO CORP. SRS-1260ST · lot 8060170 · 2022 · 5 units

LOT 8060170 MATERIAL STORAGE & LINE SUPPORT

(5) Dry Cabinet SEILIECO CORP. SRS-1260ST







QUANTITY
5

YEAR
2022

SERIAL
—

Withdrawn

SEILIECO CORP. SRS-1260ST Dry Cabinet, year 2022. Six compartments with glazed doors in three tiers, perforated shelf, digital humidity (%) and temperature (°C) display. Power input AC 220V 50~60Hz, power max. 40W/H, dimensions approx. 1200 x 760 x 1795, weight approx. 240kg. Supplied with an Air Filter Unit (Seilieco RAPID DRY-1260ST).

Not placed in a production line

(5) Dry Cabinet SEILIECO CORP. SRS-1260ST · lot 8060171 · 2022 · 5 units



Not placed in a production line

(5) Dry Cabinet SEILIECO CORP. SRS-1260ST · lot 8060172 · 2022 · 5 units



Not placed in a production line

(5) Dry Cabinet SEILIECO CORP SRS-1260ST · lot 8060173 · 2022 · 5 units



Not placed in a production line

(6) Dry Cabinet SEILIECO CORP SRS-1260ST · lot 8060174 · 2022 · 6 units



Not placed in a production line

(5) Drying Cabinet SEILIECO CORP. SRS-1260ST · lot 8060175 · 2022 · 5 units



Not placed in a production line

(5) Dry Cabinet SEILIECO CORP SRS-1260ST · lot 8060176 · 2022 · 5 units



Not placed in a production line

Drying Cabinet McDRY · lot 8060183

LOT 8060183 MATERIAL STORAGE & LINE SUPPORT

Drying Cabinet McDRY







QUANTITY 1

YEAR —

SERIAL —

STATUS Withdrawn

McDRY Drying Cabinet. Mobile cabinet on castors with three glazed door sections, wrapped in stretch film, rated AC 230 V with power consumption max. 370 W. Supplied with a rear-mounted box unit.

Not placed in a production line

ESD PCB Storage Rack · lot 8060228

LOT 8060228 MATERIAL STORAGE & LINE SUPPORT

ESD PCB Storage Rack







QUANTITY 1

YEAR —

SERIAL —

STATUS Withdrawn

ESD PCB Storage Racks. Black ESD circuit board magazine racks with metal support rails and slotted side panels, mounted on castor trolley bases. Partly stacked two high and wrapped in stretch film.

Not placed in a production line

ESD Magazine Rack plant · lot 8060248

LOT 8060248 MATERIAL STORAGE & LINE SUPPORT

ESD Magazine Rack SESK







QUANTITY
1

YEAR
—

SERIAL
—

STATUS
Withdrawn

SESK ESD Magazine Rack. Slotted magazine racks with black ESD-dissipative side panels and galvanised frames, marked with the ESD symbol. The racks are partly stacked on castor trolleys.

Not placed in a production line

(26) Barcode Reader Keyence SR-2000W · lot 8060379 · 26 units

LOT 8060379 MATERIAL STORAGE & LINE SUPPORT

(26) Barcode Reader Keyence SR-2000W







QUANTITY
26

YEAR
—

SERIAL
—

STATUS
Withdrawn

Keyence SR-2000W Barcode Reader. Power input is 24 V DC = 1600 mA, Class 2 (for UL), LPS or Class 2 (for CSA). Supplied with mounting brackets (fitted to some units).

Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Injection Molding & Plastics — 18 lots · 18 units



Injection Molding Machine ENGEL DUO DUO 11050H/7050M/1700 Combi
Lot 8060250 · 2009
ENGEL DUO DUO 11050H/7050M/1700 Combi Injection Molding Machine, year 2009, serial 170627. Two-platen design with two injection units and a turning platen, weight 25.000 kg, hydraulic oil filling 3000 l of mineral oil ISO VG 46, DIN 51524 HLP. Supplied with a ...
Used in: Molding Line 1 · Material loading; Molding Line 1 · Mold temperature control; Molding Line 1 · Injection molding; Molding Line 1 · Quick mold change; Molding Line 1 · Part take-out robot

Injection Molding Machine ENGEL DUO 11050H/7050M/1700 Combi
Lot 8060251 · 2009
ENGEL DUO 11050H/7050M/1700 Combi Injection Molding Machine, year 2009, serial 170626. Fitted with two injection units, a moving platen, a turning platen, a stationary platen and an ENGEL Access Card control panel with touch screen; weight 25.000 kg. Supplied ...
Used in: Molding Line 2 · Injection molding; Molding Line 2 · Quick mold change; Molding Line 2 · Part take-out robot

Injection Molding Machine ENGEL DUO 23050H/11050M/2300 Combi
Lot 8060252 · 2009
ENGEL DUO 23050H/11050M/2300 Combi Injection Molding Machine, year 2009, serial 171604. Fitted with two injection units, an operator panel with access card reader and a quick mold change panel, with a recorded weight of 32 000 kg. Supplied with a YUDO-STAR MEG...
Used in: Molding Line 5 · Material loading; Molding Line 5 · Mold temperature control; Molding Line 5 · Injection molding; Molding Line 5 · Quick mold change; Molding Line 5 · Part take-out robot

Injection Molding Machine ENGEL DUO 2300 2F CLS
Lot 8060253 · 2008
ENGEL DUO 2300 2F CLS Injection Molding Machine, year 2008, serial 166130. Two-platen machine with two injection units, marked Unit 1 and Unit 2, weighing 140.000 kg (plate on machine enclosure) and 32.000 kg (second plate), with a hydraulic system oil filling...
Used in: Molding Line 6 · Material loading; Molding Line 6 · Injection molding; Molding Line 6 · Part take-out robot

Injection Molding Machine ENGEL DUO 11050H/7050M/1700 Combi
Lot 8060254 · 2008
ENGEL DUO 11050H/7050M/1700 Combi Injection Molding Machine, year 2008, serial 168251. Fitted with two injection units labelled Agg. 1 and Agg. 2, weight 25.000 kg, hydraulic oil filling 3000 l of mineral oil ISO VG 46, DIN 51524 HLP. Supplied with a Yudo-Star...
Used in: Molding Line 3 · Injection molding; Molding Line 3 · Quick mold change; Molding Line 3 · Part take-out robot

Injection Molding Machine ENGEL DUO 11050H/7050M/1700
Lot 8060255 · 2008
ENGEL DUO 11050H/7050M/1700 Injection Molding Machine, year 2008, serial 168248. Weight 25.000 kg, hydraulic system oil filling 3000 l of mineral oil ISO VG 46 (DIN 51524-2 HLP), control cabinet 3/PEN AC 400/230 V, 50 Hz, TN-C-S. Supplied with a Yudo MEGA-2000...
Used in: Molding Line 4 · Material loading; Molding Line 4 · Mold temperature control; Molding Line 4 · Injection molding; Molding Line 4 · Quick mold change; Molding Line 4 · Part take-out robot

Injection Moulding Machine ENGEL DUO 23050H/11050M/3200
Lot 8060256 · 2008
ENGEL DUO 23050H/11050M/3200 Injection Moulding Machine, year 2008, serial 168162. Two injection units labelled AGG. 1 and AGG. 2; weight 25.000 kg; hydraulic oil filling 3000 l, mineral oil ISO VG 46, DIN 51524-2 HLP. Supplied with a Yudo-Star MEGA-2500-2P ga...
Used in: Molding Line 7 · Material loading; Molding Line 7 · Mold temperature control; Molding Line 7 · Injection molding; Molding Line 7 · Part take-out robot

Storage Hopper
Lot 8060257
Storage Hopper. Three-compartment hopper on a steel frame, with compartments marked C1, C2 and C3, each having a conical outlet and inspection windows. The outlets are connected to flexible conveying hoses. Supplied with 3 conveying hoses.
Used in: Molding shared · Central storage hopper

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

Resin Dryer Shini SHD-1500U-SL-CE
Lot 8060258 · 2018
Shini SHD-1500U-SL-CE Resin Dryer, year 2018, serial 2HU00001227. Insulated hopper with SHD-U Power Dryer controller, manual discharge valve and mounted blower, 35000 W, 3 Ø 400 V, 50 Hz, weight approx. 495 KG, dimensions approx. 105*141*217 CM. Supplied with ...
Used in: Molding Line 1 · Resin drying

Resin Dryer Shini SHD-1500U-SL-CE
Lot 8060259 · 2018
Shini SHD-1500U-SL-CE Resin Dryer, year 2018, serial 2HU00001228. Rated at 35000 W, 3~ / 400 V, 50 Hz, version C, with approx. weight 495 KG and approx. dimensions 105*141*217 CM. Supplied with a steel support frame with platform, railing and cage ladder, an O...
Used in: Molding Line 2 · Resin drying; Molding Line 2 · Material loading

Hopper Dryer SHINI SHD-1500U-SL-CE
Lot 8060260 · 2018
SHINI SHD-1500U-SL-CE Hopper Dryer, year 2018, serial 2HU00001229. Fitted with an SHD-U Hopper Dryer Controller and main switch, with an insulated hopper, rated 35000 W on 3 Ø 400 V, 50 Hz, weight approx. 495 KG and dimensions approx. 105*141*217 CM. Supplied ...
Used in: Molding Line 3 · Resin drying

Dehumidifying Dryer Shini SD-2000H-LC-D-CE
Lot 8060261 · 2018
Shini SD-2000H-LC-D-CE Dehumidifying Dryer, year 2018, serial 2DH00000377. Control cabinet with Schneider Electric Magelis touch panel and main switch. Power 59500 W, 3~ / 400 V, 50 Hz, version E. Dimensions 215*141*206 CM, weight 937 KG.
Used in: Molding Line 7 · Resin drying

Resin Dryer Shini
Lot 8060262 · 2015
Shini Resin Dryer, year 2015, serial 2DU15070020. Fitted with a Schneider Electric Magelis touchscreen control panel and connecting hoses, version B, 3~ / 400 V, 50 Hz, power 31200 W, weight approx. 725 KG, dimensions approx. 174*126*261 CM. Supplied with a dr...
Used in: Molding Line 4 · Resin drying

Resin Dryer Shini
Lot 8060263 · 2016
Shini Resin Dryer, year 2016, serial 2DU16100022. Power 31200 W, 3~ / 400 V, 50 Hz, version B. Weight approx. 725 kg, dimensions approx. 174*126*261 CM. Supplied with a Schneider Electric Harmony touch screen panel.
Used in: Molding Line 5 · Resin drying

Resin Dryer Shini
Lot 8060264 · 2015
Shini Resin Dryer, year 2015, serial 2DU15070019. Stainless steel drying hopper on a mobile stand, with a control cabinet fitted with a Schneider Electric Harmony touchscreen. Power 31200 W, 3 Ø 400 V, 50 Hz, weight approx. 725 KG, dimensions approx. 174*126*2...
Used in: Molding shared · Spare resin dryer

Filter Unit Moretto FC40CPB
Lot 8060265 · 2015
Moretto FC40CPB Filter Unit, year 2015, serial 1514772. Recorded data: voltage 24DC, power 0,01 kW and weight approx. 112 kg. Supplied with a Moretto blower unit with control cabinet.
Used in: Molding shared · Vacuum conveying filter

Filter Unit MORETTO
Lot 8060266
MORETTO Filter Unit. Stainless steel separator column with pressure gauge, mounted on a blue steel frame with castors, and a side channel blower on a separate blue frame. Control cabinet with touchscreen operator panel. Supplied with a side channel blower and ...
Used in: Molding shared · Vacuum conveying filter

Resin Dryer Plastic Systems D820P CS TCHC
Lot 8060267 · 2016
Plastic Systems D820P CS TCHC Resin Dryer, year 2016, serial 10022074. Weight approx. 1650 kg, rated voltage 3~ / 400 V, 50 Hz, nominal power 47.5 kW, total load current 83 A, degree of protection IP 54. Supplied with (3) drying hoppers, and (1) support frame ...
Used in: Molding Line 6 · Resin drying

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Industrial Robots & Automation — 17 lots · 17 units

Mobile Robot UBTECH XCAD101
Lot 8060249
UBTECH XCAD101 Automated Guided Vehicle, serial DAQ003UBT30000089. Input voltage DC 25.6 V; product size approx. 550 (L) x 485 (W) x 1285 (H) mm; fitted with a display screen, an emergency stop button and multi-level shelves. Supplied with a power adapter with...
Not placed in a production line

(2) Electronic Mastering Set KUKA SEMD Justage Set / SEMD/MEMD Justageset
Lot 8060273
KUKA SEMD Justage Set / SEMD/MEMD Justageset Electronic Mastering Set. Set 1 carries article number AN 00-228-936 and Set 2 AN 00-228-934; the Universal Mastering Box is AN 00-228-862 and the SEMD Sensor 00-228-930. Supplied with two carrying cases, two Univer...
Not placed in a production line

Industrial Robot FANUC R-2000iB/125L
Lot 8060341 · 2011
FANUC R-2000iB/125L Industrial Robot, year 2011, serial R11900/26. Robot controller type A05B-2535-B056, serial no. E11831978, dated 2011-08, with a 3 phase, 50/60 Hz power supply rated 12 KVA. Supplied with a Robot Controller (Fanuc System R-30iA) and a Teach...
Not placed in a production line

Industrial Robot FANUC R-2000iC/210F
Lot 8060342 · 2020
FANUC R-2000iC/210F Industrial Robot, year 2020, serial R20600B71. Robot type A05B-1333-B205, weight approx. 1090 kg; robot controller weight approx. 120 kg, input voltage (multi-tap input) 380-415/440-500 VAC, EN55011 Group 1 Class A. Supplied with a Robot Co...
Not placed in a production line

Industrial Robot KUKA KR 120 R3100-2 / FLR
Lot 8060343 · 2025
KUKA KR 120 R3100-2 / FLR Industrial Robot, year 2025, serial 1105606. Series QUANTEC-2, payload 120 kg, range 3100 mm, robot weight 1148 kg; control cabinet supply voltage 3~ 380...480 V, 50/60 Hz, full-load current 15 A. Supplied with a KUKA KR C5 dualcab AC...
Used in: Molding Line 7 · Stacking / palletizing robot

Industrial Robot KUKA KR 120 R3100-2 / FLR
Lot 8060344 · 2025
KUKA KR 120 R3100-2 / FLR Industrial Robot, year 2025, serial 1105605. Series QUANTEC-2, payload 120 kg, range 3100 mm, robot weight approx. 1148 kg; control cabinet supply 3~ 380...480V, 50/60Hz, full load current 15A. Supplied with a KUKA KR C5 dualcab AC co...
Used in: Molding Line 6 · Stacking / palletizing robot

Industrial Robot KUKA KR 16 R2010-2 / SEL
Lot 8060345 · 2025
KUKA KR 16 R2010-2 / SEL Industrial Robot, year 2025, serial 810127635. Payload 16 kg, range approx. 2013 mm, weight approx. 261 kg, with a KUKA KR C4 controller on 3x400V, 50/60Hz, 22A full-load current. Supplied with a KUKA KR C4 robot controller and a KUKA ...
Used in: Molding Line 5 · Stacking / palletizing robot

6-Axis Industrial Robot KUKA KR 10 R1440-2
Lot 8060346 · 2025
KUKA KR 10 R1440-2 6-Axis Industrial Robot, year 2025, serial 4327469. Payload 10 kg, reach 1440 mm, robot weight approx. 163 kg, with an energy supply chain mounted on the arm. Supplied with a KUKA KR C5 micro control cabinet, a KUKA teach pendant, a KUKA Akk...
Not placed in a production line

6-Axis Industrial Robot KUKA KR 10 R1440-2
Lot 8060347 · 2025
KUKA KR 10 R1440-2 6-Axis Industrial Robot, year 2025, serial 4327470. CYBERTECH-2 Series, payload 10 kg, range approx. 1440 mm, weight approx. 163 kg, with a KUKA KR C5 micro controller. Supplied with a KUKA teach pendant, a KUKA Akkupack battery pack and a s...
Not placed in a production line

Industrial Robot KUKA KR 30-3
Lot 8060348 · 2017
KUKA KR 30-3 Industrial Robot, year 2017, serial 703959. Load 30 KG, range 2033 MM; control cabinet supply voltage 3x400V, 50/60Hz, full load current 22A, mains fuse 25A. Supplied with a KUKA KR C4 control cabinet, a KUKA teach pendant with cable, a connecting...
Used in: Molding Line 4 · Stacking / palletizing robot

Industrial Robot KUKA KR 10 R1440-2
Lot 8060349 · 2025
KUKA KR 10 R1440-2 Industrial Robot, year 2025, serial 4327566. Payload 10 kg, range 1440 mm, weight 163 kg, series CYBERTECH-2; control unit supply voltage 200-240 V, 50/60 Hz, mains fuse 16 A. Supplied with a KUKA KSP-300-6-AC control unit, a KUKA teach pend...
Not placed in a production line

Industrial Robot KUKA KR 60-3
Lot 8060350 · 2018
KUKA KR 60-3 Industrial Robot, year 2018, serial 704697. Load 60 KG, range approx. 2033 MM, weight approx. 665 KG, variant KR60_3 C4 FLR ZH02, KR60_3\FLOOR; KR C4 control cabinet with 3x400V supply, 50/60Hz, 22A full-load current. Supplied with a KUKA teach pe...
Used in: Molding Line 2 · Stacking / palletizing robot

Industrial Robot KUKA KR 60-3
Lot 8060351 · 2018
KUKA KR 60-3 Industrial Robot, year 2018, serial 704637. Load 60 KG, range approx. 2033 MM and weight approx. 665 KG, with control cabinet supply of 3x400V, 50/60Hz, full-load current 22A and mains fuse 25A. Supplied with a KUKA KR C4 control cabinet and a KUK...
Used in: Molding Line 3 · Stacking / palletizing robot

Industrial Robot KUKA KR 3 R540
Lot 8060352 · 2017
KUKA KR 3 R540 Industrial Robot, year 2017, serial 495504. Payload 3 KG, reach 541 MM, robot weight 27 KG. Supplied with a KUKA KR C4 compact robot controller (supply voltage 1x230V, 50/60Hz, mains fuse 16A), a KUKA teach pendant, a mains cable and a set of co...
Not placed in a production line

(5) Industrial Robot KUKA KR 3 R540
Lot 8060353 · 2017
KUKA KR 3 R540 Industrial Robot, year 2017, 2018, serial 495101, 495149, 495909, 495910, 495911. Robot data: load 3 KG, range approx. 541 MM, weight approx. 27 KG, variants KR3R540 C4SR and KR3R540\FLOOR. Controller: supply voltage 1x230 V, 50/60 Hz, full load...
Not placed in a production line

Industrial Robot KUKA KR 50 R2500 / SEL
Lot 8060375 · 2025
KUKA KR 50 R2500 / SEL Industrial Robot, year 2025, serial 810140859. Payload 50 kg, range 2501 mm, series IONTEC, weight approx. 566 kg; control cabinet supply voltage 3x400 V, 50/60Hz, full load current 22A, mains fuse 25A. Supplied with a KUKA KR C4 control...
Used in: Molding Line 1 · Stacking / palletizing robot

SCARA Industrial Robot KUKA KR 12 R850 Z400 CS / FLR
Lot 8060376 · 2025
KUKA KR 12 R850 Z400 CS / FLR SCARA Industrial Robot, year 2025, serial 8101130882. Payload 12 kg, range 850 mm, weight 56 kg. Supplied with a Keyence SR-5000 vision system with SR-50AP head, a Zebra ZT411 label printer, an aluminium profile frame, a KUKA hand...
Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Test & Measurement Equipment — 121 lots · 121 units

(2) Granite Surface Plate Taekeong
Lot 8060056
Taekeong Granite Surface Plate. Mounted on a steel frame stand with four casters and four levelling feet. Supplied with a steel stand with casters.
Not placed in a production line

Fume Hood LK Lab Korea FH1200SSS
Lot 8060059
LK Lab Korea FH1200SSS Fume Hood. Size 1200mm, material SUS, article no. H02-26-220. Shipped in two shrink-wrapped cartons on plastic pallets, marked C/T No. 1 and C/T No. 2 (plant IMK2512-229).
Not placed in a production line

Granite Surface Plate
Lot 8060146
Granite Surface Plate. Mounted on a painted steel stand with swivel casters and levelling feet. Supplied with a steel stand with casters.
Not placed in a production line

Energy Dispersive X-Ray Spectrometer Shimadzu EDX-720-P
Lot 8060237
Shimadzu EDX-720-P Energy Dispersive X-Ray Spectrometer, serial Q23844800002 AE. Rated voltage 220-240V ~, 50-60Hz, max. 1000VA. Supplied with an Edwards vacuum pump, an X-ray warning light and a plastic standard sample set (PE-1E4G, Sb, LDPE).
Not placed in a production line

Linear Positioning System MATEOS CALIBRATION
Lot 8060240 · 2022
MATEOS CALIBRATION Linear Positioning System, year 2022, serial 021. Horizontal linear track with vertical mast on castors, marked "WALL-E" and fitted with cable chains, track dimensions handwritten on the lot sticker as 4000m x 2000m. Supplied with a Rittal c...
Not placed in a production line

Forced Convection Oven LKLAB KOREA Inc. LO-FS250
Lot 8060241
LKLAB KOREA LO-FS250 Forced Convection Oven, serial U100064. Rated at 220 Vac, 60 Hz, 11.9 A, with a PID control system, digital timer function, over temperature safety dial, emergency stop button and a stainless steel interior with a door viewing window. Supp...
Not placed in a production line

Forced Convection Oven LKLAB KOREA Inc. LO-FS150
Lot 8060242
LKLAB KOREA LO-FS150 Forced Convection Oven, serial V110024. Rated at 220 VAC, 60 Hz and 8.2 A, made in Korea. Supplied with a wire shelf.
Not placed in a production line

Drop Tester Lansmont
Lot 8060243 · 2008
Lansmont Drop Tester, year 2008, serial MJ5175. Vertical drop tower with motor hoist at the top and impact base plate, rated 230 V and carrying CE marking. Supplied with a control cabinet, a handheld remote control (Lansmont Field-to-Lab) and an operation and ...
Not placed in a production line

Salt Spray Tester ADE Engineering AD-29
Lot 8060244
ADE Engineering AD-29 Salt Spray Tester. Voltage 1Φ 220V AC, power 2KW, chamber temperature 35°C (±2°C), saturator tank temperature 47°C (±2°C) and pressure range 0.07-0.17MPa (sticker), with Autonics TZN4S temperature controllers and an Autonics CT4S-1P timer...
Not placed in a production line

Vibration Test System Team HPS-65
Lot 8060246
Team HPS-65 Vibration Test System, serial 660. Comprises a hydraulic power supply with electric motor, a hydraulic manifold with pressure gauges, a control cabinet, a control rack and a floor-mounted vibration table. Supplied with a Team 1510-D hydraulic power...
Not placed in a production line

Drop Tester Lansmont PDT80
Lot 8060247
Lansmont PDT80 Drop Tester, serial 18639. Fitted with vertical guide columns, an overhead hoist assembly and a base plate.
Not placed in a production line

(4) Video Signal Generator MIK K-8800
Lot 8060268
MIK K-8800 Video Signal Generator, serial KGE206, KGE208, KGE166, KGE154. Front panel with display, USB port, card slot and keypad; rear panel with plug-in module slots, Displayport, HDMI, analog, CVBS, Y/C, component, USB, RS-232C, IR and remote connections. ...
Not placed in a production line

(5) Video Signal Generator MIK21 CO., LTD. K-8800
Lot 8060269
Video Signal Generator, MIK21 CO., LTD. K-8800, serial KGE204, KGE167, KGE209, KGE158, KGE164. Programmable, with front display, USB port, card slot, keypad and rotary knob; rear chassis with seven slots fitted with HDMI, DisplayPort, DVI-D, BNC and analog int…
Not placed in a production line

(5) Video Signal Generator MIK21 CO., LTD. K-8800
Lot 8060270
Video Signal Generator, MIK21 CO., LTD. K-8800, serial KGE207, KGE156, KGE165, KGE155, KGE157. Programmable unit with display, keypad, USB port and memory card slot, with seven slots and rear connections for DisplayPort, RS-232C, Remote and IR. Rated voltage 1…
Not placed in a production line

Video Signal Generator, LCM Tester MIK K-8800, K-270L
Lot 8060271
MIK K-8800, K-270L Video Signal Generator, LCM Tester, serial K-8800: KGE173, KGE205, KGE203; K-270L: KLT467, KLT540. Video Signal Generator rated 100 - 240 VAC, 50/60 Hz, fuse T2AL250V; Multi Signal LCM Tester rated 100-240VAC, 50/60 Hz, fuse T5AL250V. Rear p…
Not placed in a production line

(5) Multi Signal LCM Tester MIK K-270L
Lot 8060272
MIK K-270L Multi Signal LCM Tester, serial KLT294, KLT436, KLT537, KLT438, KLT539. Input 100-240VAC, 50/60HZ, with fuse T5AL250V. Front panel marked Programmable Video Signal Generator and Quad LVDS; rear connectors LVDS Slave, LVDS Master, Remote, RS-232C and…
Not placed in a production line

Industrial Videoscope Olympus IV8420L2
Lot 8060274
Olympus IV8420L2 Industrial Videoscope, serial Y203665. Insertion tube diameter 4.0mm, length 2.0m (case label), with PAL video standard, AC adapter input 12V DC, 11W and battery input 10.8V DC, 11W. Supplied with a carrying case, a handheld control unit with …
Not placed in a production line

(3) Programmable Video Pattern Generator Master MSPG - 5400QL
Lot 8060275
Master MSPG - 5400QL Programmable Video Pattern Generator, serial M0P9G1294, M0P9G1295, M0P9G1296. Front panel with touch screen, keypad, Easy Jog / Enter dial and USB port; rear panel with RS-232C, Remote, LAN, LVDS-CH1 and LVDS-CH2 connectors. Touch screen, …
Not placed in a production line

Handheld 3D Scanner Creaform HandySCAN 700
Lot 8060276 · 2017
Creaform HandySCAN 700 Handheld 3D Scanner, year 2017, serial 662037. Rated 18 V DC at 0.8 A, made in Canada, and a laser product complying with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007. Supplied wit…
Not placed in a production line

Multi Test Signal Generator ShibaSoku TG39AC
Lot 8060277
ShibaSoku TG39AC Multi Test Signal Generator, serial 3000016703. Equipped with Video, Sound MPX, Teletext and RF sections and an RS-232C interface. Rated voltage AC 90-130/180-250 V, frequency 50/60 Hz, power 180 VA, 1 phase + PE, fuse 3 A, 250 V, Type T, weig…
Not placed in a production line

Test Transmitter ROHDE&SCHWARZ; SFE100
Lot 8060278
ROHDE&SCHWARZ; SFE100 Test Transmitter, serial 132729. Rack-style bench unit with front display, keypad, USB ports and RF output connector, RF output 50 Ω. Rear panel connectors are labelled Video In, Audio Aux, Dig I/Q In, 1PPS/Trig, Ref In, TS1 In, TS2 In, US…
Not placed in a production line

(2) DTV Signal Generator Eiden SSR5000A
Lot 8060279
Eiden SSR5000A DTV Signal Generator, serial DC131633, DC131634. Rated voltage ~ 100-240 V (±10%), frequency 50/60 Hz, max. power 72 W, fuse T3.15A/250V, RF output impedance 50 Ω. Rack-mount unit with front panel display, two USB ports and VGA port, made in Jap…
Not placed in a production line

(3) Quad LVDS Pattern Generator Master MSPG-5100
Lot 8060280
Master MSPG-5100 Quad LVDS Pattern Generator, serial M1P2G0114, M1P2G0115, M1P2G0116. Bench unit with touchscreen, function keys and front USB port. Rear interfaces: RS-232C, LAN, Remote, Debug and 2 LVDS output channels (CH 1, CH 2). AC input 100-240V~, 50/60…
Not placed in a production line

TV Multi Sound Encoder EIDEN 198B
Lot 8060281
EIDEN 198B TV Multi Sound Encoder, serial DF 90319. Rack-mount unit with analog level meter, and a heat sink and fan on the rear panel. Recorded data includes a voltage selector of 100 V / 110 V / 200 V / 240 V, composite output 5.85MHz, CW input 38.9MHz (90dB…
Not placed in a production line

Industrial Camera LAON PEOPLE Inc. LPMYC-CL50M
Lot 8060282
LAON PEOPLE LPMYC-CL50M Industrial Camera, serial LPV48K10001. Fitted with a cooling fan on the rear, with a lens of 35 mm focal length and 1:1.4 aperture. Supplied with a Samyang 35 mm 1:1.4 lens, a mounting bracket, a tripod with 3-way pan head, an aluminium...
Not placed in a production line

(4) Wide Band Boost Amplifier EIDEN 4013A
Lot 8060283
EIDEN 4013A Wide Band Boost Amplifier, serial GL112149, FC101825, GH106986, GD105886. Rack-mount unit with front panel power switch, fan alarm and over indicators, level adjustment, and RF input and RF output connectors. Supply voltage ~90-250V, mains switch r...
Not placed in a production line

(4) Wide Band Boost Amplifier Eiden 4013A
Lot 8060284
Eiden 4013A Wide Band Boost Amplifier, serial GG106662, GL112148, EE94282, DF90406. Rack-mount units with front power switch, fan alarm indicator, over indicator, level adjust, RF input connector, RF output connector and rear cooling fan, for a supply voltage ...
Not placed in a production line

(4) Wide Band Boost Amplifier Eiden 4013A
Lot 8060285
Eiden 4013A Wide Band Boost Amplifier, serial GD105887, GL112151, FC101824, HB112897. Rack-mount units with power switch, fan alarm and over indicators, level adjustment, and RF input and RF output connectors on the front panel, with a fan on the rear panel. I...
Not placed in a production line

(10) Display Color Analyzer Konica Minolta CA-210
Lot 8060286
Konica Minolta CA-210 Display Color Analyzer, serial B 1112675, B 1112680, B 1112553, B1108952, B1105649, B1104836, B1106648, B1107657, B1109185, B1107656. Rated voltage 100-240V~, power 50VA, frequency 50-60Hz. Supplied with a crate of measuring probes (Konic...
Not placed in a production line

(5) Digital Power Meter Yokogawa WT210
Lot 8060288
Yokogawa WT210 Digital Power Meter. Supply 100-240V AC~, 50/60Hz, with power consumption of 35VA MAX and a 250V T 1A fuse. Current input 20A MAX, voltage input 600V MAX. Interfaces: GP-IB (IEEE488) and SERIAL (RS-232-C).
Not placed in a production line

Two-Line V-Network ROHDE&SCHWARZ; ENV216
Lot 8060290
ROHDE&SCHWARZ; ENV216 Two-Line V-Network, serial 102179. Equipment under test is rated at max. 16 A, with an input of 0 ... 240 V AC / 50 ... 60 Hz or 0 ... 50 V DC. The RF output is 50 Ω and the external power supply is 10 ... 18 V DC, 250 mA. Item ID 3560.655...
Not placed in a production line

Halogen Moisture Analyzer METTLER TOLEDO HB43-S
Lot 8060291
METTLER TOLEDO HB43-S Halogen Moisture Analyzer, serial 1123411021. Capacity 54 g, readability d = 0.001 g, 200-240V, 2A, 50/60Hz, made in Switzerland. Supplied with a sample pan handler.
Used in: Molding shared · QC lab

Spectroradiometer Konica Minolta CS-3000HDR
Lot 8060292
Konica Minolta CS-3000HDR Spectroradiometer, serial 3001154. DC input 12V, 3A, with RS-232C, USB and EXT (V.SYNC) interfaces; made in Japan. Supplied with an AC adapter and a lens with protective cap.
Not placed in a production line

Chroma Meter Konica Minolta CS-100 A
Lot 8060293
Konica Minolta CS-100 A Chroma Meter. Handheld unit with lens, LCD display and pistol grip, with switches for Calibration Preset / Vari., Measuring Mode Abs. / Diff. and Response Fast / Slow. Supplied with a transport case with foam insert, a carrying strap, a...
Not placed in a production line

(3) Digital Power Meter Yokogawa WT210
Lot 8060294
Yokogawa WT210 Digital Power Meter. Supply 100-240V AC, 50/60Hz, with power consumption of 35VA max. and a 250V T 1A fuse. Current input 20A max., voltage input 600V max., CAT II, with GP-IB (IEEE488) and serial (RS-232-C) interfaces.
Not placed in a production line

Handheld Calibrator Yokogawa CA71
Lot 8060295
Yokogawa CA71 Handheld Calibrator, serial T1GB027. Measure ranges are 300V ~, 100V, 10V, 1V, 100mV TC, Ω RTD, FREQ 30Vmax and mA; source ranges are 30V, 10V, 1V, 100mV TC, 400Ω RTD, PULSE, 20mA, 4-20mA and 20mA SINK. Supplied with a carrying case, user's manua...
Not placed in a production line

(2) Electrical Safety Analyzer Chroma 19032
Lot 8060297
Chroma 19032 Electrical Safety Analyzer, serial AAP190321258, AAP190321423. Rated for a maximum of 5KV AC and 6KV DC, it is a bench-top unit with twin ports, Scan and RS232 interfaces. Calibration labels (HES, s.r.o.) are valid until 15.1.2027.
Not placed in a production line

(2) Electrical Safety Analyzer Chroma 19032
Lot 8060298
Chroma 19032 Electrical Safety Analyzer, serial AAP190321308, AAP190321036. Twin Ports version with high voltage output max 5 kV AC / 6 kV DC. Line voltage selector settings of 90V-110V~, 108V-132V~, 198V-242V~ and 216V-250V~; interfaces Scan and RS232; pollut...
Not placed in a production line

(2) Electrical Safety Analyzer Chroma 19032
Lot 8060299
Chroma 19032 Electrical Safety Analyzer, serial AAP190321552, AAP190321041. Maximum output voltage 5 kV AC / 6 kV DC, with twin ports design and rear interfaces GPIB (slot without module), Scan and RS232. Each unit carries a HES s.r.o. calibration sticker, uni...
Not placed in a production line

(2) Electrical Safety Analyzer Chroma 19032
Lot 8060300
Chroma 19032 Electrical Safety Analyzer, serial AAP190321054, AAP190320561. High voltage output is max 5KV AC / 6KV DC. Fitted with GPIB, Scan and RS232 interfaces on the rear panel and marked Twin Ports on the front panel.
Not placed in a production line

(2) Electrical Safety Analyzer Chroma 19032
Lot 8060301
Chroma 19032 Electrical Safety Analyzer, serial AAP190320989, AAP190321002. Twin Ports model with output max 5KV AC / 6KV DC and line voltage ranges of 90V-110V, 108V-132V, 198V-242V and 216V-250V. Interfaces are SCAN and RS232, with calibration stickers (HES,...
Not placed in a production line

(2) Electrical Safety Analyzer Chroma 19032
Lot 8060302
Chroma 19032 Electrical Safety Analyzer, serial AAP190321344, AAP190320998. Twin ports, with output max. 5 kV AC / 6 kV DC and line voltage selector ranges 90V-110V, 108V-132V, 198V-242V and 216V-250V. Each unit has a numeric keypad, Stop and Start buttons, an...
Not placed in a production line

(2) Electrical Safety Analyzer Chroma 19032
Lot 8060303
Chroma 19032 Electrical Safety Analyzer, serial AAP190321034, AAP190321010. Maximum output voltage 5KV AC / 6KV DC. Line voltage 90V-110V~ and 108V-132V~ with 8AT 250V fuse, or 198V-242V~ and 216V-250V~ with 4AT 250V fuse. Units carry calibration labels of HES...
Not placed in a production line

(4) Programmable Video Signal Generator MIK K-8268, K-8258
Lot 8060304
MIK K-8268, K-8258 Programmable Video Signal Generator, year 09.2005, serial KGE181, KGE434, KGE393, KGE061. Front panel with LCD display, keypad, memory card slot and USB port; rear panel with HDMI, DVI-I, analog, BNC, SCART, RS-232C and USB connections. Rate...
Not placed in a production line

(4) Programmable Video Signal Generator MIK K-8268
Lot 8060305
MIK K-8268 Programmable Video Signal Generator, year 09.2005, serial KGE1671, KGE1373, KGE197, KGE016. Front keypad, LCD display, memory card slot and USB port. Rear panel with HDMI 1-3, DVI-I, analog, BNC, optical input, SCART, RS-232C and USB connections. Ra...
Not placed in a production line

(4) Programmable Video Signal Generator MIK K-8268
Lot 8060306 · 2005
MIK K-8268 Programmable Video Signal Generator, year 2005, serial KGE013, KGE228, KGE1365, KGE1698. Rated voltage 100-240 VAC, 50/60 Hz, with fuse T2AL250V. Calibration stickers dated 14.1.2026 (valid until 14.1.2027) and 13.1.2026 (valid until 13.1.2027).
Not placed in a production line

(4) Programmable Video Signal Generator MIK K-8268
Lot 8060307 · 2005
MIK K-8268 Programmable Video Signal Generator, year 2005, serial KGE211, KGE1662, KGE1669, KGE429. Front panel with LCD display, keypad, memory card slot and USB port. Rear panel with HDMI 1-3, DVI-I (Single and HDCP), DVI-I (Dual), analog, optical input, RS-...
Not placed in a production line

(4) Video Signal Generator MIK K-8268
Lot 8060308
MIK K-8268 Video Signal Generator, year 09.2005, serial KGE010, KGE177, KGE302, KGE528. Programmable, with HDMI Ver 1.3, LCD display, keypad, memory card slot and USB port on the front panel. Rear panel with 3 HDMI ports, DVI-I (Single & HDCP), DVI-I (Dual), B...
Not placed in a production line

(4) Programmable Video Signal Generator MIK K-8268
Lot 8060309 · 2005
MIK K-8268 Programmable Video Signal Generator, year 2005, serial KGE012, KGE381, KGE035, KGE1372. Front panel with LCD display, keypad, memory card slot and USB port. Rear connections: 3 x HDMI, DVI-I (Single & HDCP), DVI (Dual), Analog, Optical Input, Y/C, C...
Not placed in a production line

(3) Programmable Video Signal Generator MIK K-8268
Lot 8060310 · 2005
MIK K-8268 Programmable Video Signal Generator, year 2005, serial KGE311, KGE200, KGE1371. Features Caption/Teletext/Media Player HDMI function, keypad, LCD display, memory card slot and USB port. Rear connections: 3 HDMI, DVI-I (Single & HDCP), DVI-I (Dual), ...
Not placed in a production line

Dynamic Strain Recorder Tokyo Measuring Instruments Lab. DC-204R
Lot 8060312
Tokyo Measuring Instruments Lab. DC-204R Dynamic Strain Recorder, serial D0A1371363. Four measuring channels, CH.1 to CH.4 (CH.1 with Remote Sense), a memory card slot, power input DC10V-16V, 0.4A MAX, and USB, Control IN and Control OUT interfaces. Supplied w...
Not placed in a production line

Digital Charged Plate Monitor ION Systems 280A
Lot 8060313
ION Systems 280A Digital Charged Plate Monitor, serial 61948. Fitted with an LCD display, plate voltage bar display, range selector, analog output, and temperature and humidity sensors, with a rated voltage of 100-240 VAC, frequency of 50-60 Hz and power of 30...
Not placed in a production line

Photometer Radiant Vision Systems IP-PMY16
Lot 8060314
Radiant Vision Systems IP-PMY16 Photometer, serial 9276080. Labelled ProMetric, made in USA, with a resolution of 16M Pixel. Supplied with a transport case, a power supply, a power cord, an Ethernet cable and a software CD (TrueTest 1.6).
Not placed in a production line

Digital Phosphor Oscilloscope Tektronix TDS5054
Lot 8060315
Tektronix TDS5054 Digital Phosphor Oscilloscope, serial B051580. Four channels with a touch screen and auxiliary input, bandwidth 500 MHz and sample rate 5 GS/s. Inputs CH 1 - CH 4: 150V CAT I, 1M Ω 18pF, or 50 Ω, ≤5V RMS; input AUX IN:
Not placed in a production line

(4) MPEG Recorder & Player Tektronix MTX100B
Lot 8060316
Tektronix MTX100B MPEG Recorder & Player, serial B010232, B010233, B010236, B020551. Benchtop unit with colour display, 2 front USB ports and carrying handle. Rear panel interfaces: ASI In, ASI Out, SPI In/Out, IEEE 1394b, VGA and LAN. Rated voltage 100-240 V,...
Not placed in a production line

(4) MPEG Recorder & Player Tektronix MTX100B
Lot 8060317
Tektronix MTX100B MPEG Recorder & Player, serial B010234, B010237, B010278, B010231. Front panel with display, menu keys, navigation keys and 2 USB ports. Rear panel with ASI In, ASI Out, SPI In/Out, Clock/Ref In, IEEE 1394b, VGA, LAN and Com connections. Opti...
Not placed in a production line

(3) MPEG Recorder & Player Tektronix MTX100, MTX100A
Lot 8060318
Tektronix MTX100, MTX100A MPEG Recorder & Player, serial J320199, J320197, B010296. Rated voltage 100-240 V, 50/60 Hz, with power consumption of 120 VA. Rear interfaces: ASI In/Out, SPI In/Out, Trig In, Clk/Ref In (0 dBm), SCSI, COM2, Printer, VGA and 100/10 B...
Not placed in a production line

Advanced Test Platform Teledyne LeCroy 980B
Lot 8060319
Teledyne LeCroy 980B Advanced Test Platform, serial 19020002. Portable unit with integrated touchscreen display and carrying handle, Quantum Data Series, part number 00-00231, revision N, rated 100-240 VAC, 50/60 Hz, 175 VA Max, calibrated 01 February 2019 wit...
Not placed in a production line

Test Platform Teledyne LeCroy 980B
Lot 8060320
Teledyne LeCroy 980B Test Platform, serial 19020001. Plate designation Quantum Data 980B Advanced Test Platform, part number 00-00231, revision N, with installed options 95-00156 HDMI 2.1 Board and 95-00158 HDMI 2.1 Generator. Rated voltage 100-240 V AC, 50/60...
Not placed in a production line

(3) Digital Phosphor Oscilloscope Tektronix TDS 3032C
Lot 8060321
Tektronix TDS 3032C Digital Phosphor Oscilloscope, serial TDS3032C C013385, TDS3032C C013392, TDS3032C C013394. Bandwidth 300 MHz with a sample rate of 2.5 GS/s. Channel 1 and 2 inputs 1 MΩ, 13 pF, ≤150 VRMS CAT I. Supply voltage 100 V~ to 240 V~ (±10%), line ...
Not placed in a production line

(2) Digital Storage Oscilloscope Tektronix TDS 2012B
Lot 8060322
Tektronix TDS 2012B Digital Storage Oscilloscope, serial C056355, C056366. Two channel, with a bandwidth of 100 MHz and a sample rate of 1 GS/s. Supply 100-240V, 50-60Hz or 115V, 400Hz, power 30 WATTS, input rating 300V CAT II.
Not placed in a production line

(3) Display Color Analyzer Konica Minolta CA-310
Lot 8060323
Konica Minolta CA-310 Display Color Analyzer, serial B 1105620, B 1105740, B 1106826. Rated voltage 100-240V~, power 50VA, frequency 50-60Hz, with USB, RS-232C and EXT (V.SYNC) interfaces. Supplied with Measuring Probe (Konica Minolta CA-PU32/35).
Not placed in a production line

(4) Display Color Analyzer Konica Minolta CA-310
Lot 8060324
Konica Minolta CA-310 Display Color Analyzer, serial B 1105658, B 1105642, B 1105589, B 1301220. Bench-top units with front keypad and display, rated voltage 100-240V~, power consumption 50VA, frequency 50-60Hz. Supplied with Konica Minolta CA-310 measuring pr…
Not placed in a production line

(3) Display Color Analyzer Konica Minolta CA-310
Lot 8060325
Konica Minolta CA-310 Display Color Analyzer, serial B 1105697, B 1104536, B 1105454. Rated voltage 100-240V~, power 50VA, frequency 50-60Hz, with USB, RS-232C and EXT (V.SYNC) interfaces. Supplied with three Probes (CA-310 Standard Probe) and one Expansion Bo…
Not placed in a production line

(2) Display Color Analyzer Konica Minolta CA-310
Lot 8060326
Konica Minolta CA-310 Display Color Analyzer, serial B 1104504, B 1104365. Rated voltage 100-240V~, power 50VA, frequency 50-60Hz, made in Japan. Measuring probe calibrated on 15.08.2025, calibration valid until 15.02.2026, calibration laboratory plant. Suppli…
Not placed in a production line

(6) Color Analyser Probe Konica Minolta CA-310
Lot 8060327
Konica Minolta CA-310 Color Analyser Probe. Small type probe, designation on probe housing CA-PSU32/35, fitted with a measuring hood and connecting cable. Supplied with a connecting cable.
Not placed in a production line

(2) Color Analyser Probe Konica Minolta CA-310 CA-P32/35
Lot 8060328
Konica Minolta CA-310 CA-P32/35 Color Analyser Probe. Master probe label A3CT-0005-75 and barcode label 0GBA-Y51942 are recorded. Supplied with connecting cables.
Not placed in a production line

FTIR Spectrophotometer Shimadzu IRAffinity-1S
Lot 8060329
Shimadzu IRAffinity-1S FTIR Spectrophotometer, serial A21965301193LP. Catalogue number 206-30500-58, rated voltage 220V/230V/240V~, 50/60Hz, power consumption 150VA, fuse type T 4.0A, Class 1 Laser Product. Supplied with a Single Reflection ATR Accessory (Shim…
Not placed in a production line

Digital Microscope Hirox KH-7700
Lot 8060330
Hirox KH-7700 Digital Microscope, serial 0491310. Fitted with a fold-up monitor, front control panel, USB ports and disc drive, rated 100-240 V~, 50/60 Hz, 2.5-1.0 A. Supplied with a Hirox microscope stand with XY stage, a Hirox MXG-5040RZ lens with encoder mo…
Not placed in a production line

(4) Display Color Analyzer Konica Minolta CA-210
Lot 8060331
Konica Minolta CA-210 Display Color Analyzer, serial B1104911, B 1112659, B1102330, B1103391. Rated voltage 100-240V~, frequency 50-60Hz, power consumption 50VA, with USB, RS-232C and EXT (V.SYNC) interfaces and measuring ports P1 to P5. Supplied with (8) Meas…
Not placed in a production line

(10) Display Color Analyzer Konica Minolta CA-210
Lot 8060332
Konica Minolta CA-210 Display Color Analyzer, serial B1103899, B1106456, B1102259, B1107984, B1101039, B1103357, B1107633, B1104307, B1106656, B1103370. Rated voltage 100-240V~, power 50VA, frequency 50-60Hz, with USB, RS-232C, EXT (V.SYNC) and probe ports P1 …
Not placed in a production line

(10) Display Color Analyzer Konica Minolta CA-210
Lot 8060333
Konica Minolta CA-210 Display Color Analyzer. Rear connections comprise a Probe Port P1, a USB Port, an RS-232C Port and an EXT (V.SYNC) Connection, plus an expansion panel with Ports P2 to P5. Rated voltage 100-240V~, power 50VA, frequency 50-60Hz. Supplied w…
Not placed in a production line

(9) Display Color Analyzer Konica Minolta CA-210
Lot 8060334
Konica Minolta CA-210 Display Color Analyzer, serial B1105658, B1105675, B1108919, B1107638, B1107652, B1104843, B1101314, B1101118, B1105911. Rated voltage 100-240V~, frequency 50-60Hz, power consumption 50VA, with USB, RS-232C and EXT (V.SYNC) interfaces and...
Not placed in a production line

(8) Display Color Analyzer Konica Minolta CA-210
Lot 8060335
Konica Minolta CA-210 Display Color Analyzer, serial B 1112279, B1110009, B1107505, B 1112614, B1107534, B1110010, B 1111584, B1109537. Rated voltage 100-240V~, power consumption 50VA, frequency 50-60Hz, with P1, USB, RS-232C and EXT (V.SYNC) interfaces. Suppl...
Not placed in a production line

(8) Display Color Analyzer Konica Minolta CA-210
Lot 8060336
Konica Minolta CA-210 Display Color Analyzer, serial B1107529, B1106466, B1104908, B1107906, B1101309, B1106108, B1109415, B1107355. Rated voltage 100-240V~, rated power 50VA, frequency 50-60Hz, with rear connections P1, USB, RS-232C and EXT (V.SYNC). Supplied...
Not placed in a production line

(8) Display Color Analyzer Konica Minolta CA-210
Lot 8060337
Konica Minolta CA-210 Display Color Analyzer, serial B1109009, B1106454, B1106429, B1108920, B1104915, B1101290, B1109199, B1106642. Probe ports P1 to P5, with USB, RS-232C and external V.SYNC connections. Rated voltage 100-240V~, power consumption 50VA, frequ...
Not placed in a production line

(8) Display Color Analyzer Konica Minolta CA-210
Lot 8060338
Konica Minolta CA-210 Display Color Analyzer, serial B1107756, B1107650, B1106432, B1106422, B1102338, B1107636, B1104834, B1106650. Rear panel with USB, RS-232C and external V.SYNC connections and probe ports P1 to P5. Rated voltage 100-240V~, frequency 50-60...
Not placed in a production line

(8) Display Color Analyzer Konica Minolta CA-210
Lot 8060339
Konica Minolta CA-210 Display Color Analyzer, serial B1105182, B1103407, B1103385, B1107635, B1109168, B1107646, B1105761, B1109003. Rated voltage 100-240V~, frequency 50-60Hz, power consumption 50VA, with USB, RS-232C and EXT (V.SYNC) interfaces. Supplied wit...
Not placed in a production line

(8) Display Color Analyzer Minolta / Konica Minolta CA-210
Lot 8060340
Display Color Analyzer, Minolta / Konica Minolta CA-210, serial B1102333, B1104827, B 1112479, B1104921, B 1112548, B 1112590, B 1112513, B1103361. Rated voltage 100-240V~, frequency 50-60Hz, power consumption 50VA, with P1, USB, RS-232C and EXT (V.SYNC) inter...
Not placed in a production line

Granite Surface Table Planolith
Lot 8060377
Planolith Granite Surface Table. Dimensions approx. 1500 mm x 1500 mm x 900 mm, with a table thickness of approx. 220 mm. Supplied with a steel stand.
Not placed in a production line

Measuring Instruments and Cameras Konica Minolta, Renishaw and more
Lot 8060380
Measuring Instruments and Cameras, Konica Minolta, Renishaw and more. Several items carry calibration labels of HES s.r.o., including the Chroma Meter (serial 1005124, valid until 8. 4. 2027) and the UV Power Puck II (serial 29725, valid until 29. 1. 2027). Su...
Not placed in a production line

Granite Surface Plate
Lot 8060386
Granite Surface Plate. Dimensions approx. 1600 x 1000 x 900 mm, with a thickness of approx. 200 mm. Supplied with a steel stand.
Not placed in a production line

Granite Surface Plate
Lot 8060387
Granite Surface Plate. Dimensions are approx. 1600 x 1000 x 900 mm, with a thickness of approx. 200 mm. Supplied with a steel stand.
Not placed in a production line

Granite Surface Plate
Lot 8060388
Granite Surface Plate. Dimensions approx. 1500 x 1000 x 1050 mm, with a thickness of approx. 200 mm. Supplied with a steel stand.
Not placed in a production line

Granite Surface Plate
Lot 8060389
Granite Surface Plate. Recorded dimensions are approx. 1600 x 1000 x 900 mm, with an approx. thickness of 200 mm. Supplied with a steel stand.
Not placed in a production line

Test and Measuring Equipment IMADA, Fluke and more
Lot 8060425
Test and Measuring Equipment, IMADA, Fluke and more. The lot comprises laboratory test and measuring instruments, partly in carrying cases. Supplied with push-pull force gauges (IMADA FB), torque testers and a Moisture Meter (Aqua-Boy
Not placed in a production line

Gauge Sets, Weighing Scales, DC Power Supplies Ohaus, Imada and more
Lot 8060426
Gauge Sets, Weighing Scales, DC Power Supplies, Ohaus, Imada and more. Gauge block set with block markings 3.50 to 4.00. Supplied with pin gauge sets in wooden case, a gauge block set in plastic case, bevel protractors in case, a Mitutoyo vernier caliper, an A...
Not placed in a production line

(2) Granite Surface Plate
Lot 8060427
Granite Surface Plate. Mounted on a steel stand with levelling feet. Calibration label records a calibration date of 28.1.2026, valid until 28.1.2027.
Not placed in a production line

Abrasion Testing Machine Kyung Do Precision Co., Ltd. KDGE-450
Lot 8060428 · 2011
Kyung Do Precision KDGE-450 Abrasion Testing Machine, year 2011, serial 110830. Benchtop unit with sliding test table, test fixture with weights, speed meter, speed control, counter and emergency stop, supply 1 phase, 230 V, 50 Hz, 5 A, weight 45 kg. Supplied ...
Not placed in a production line

Electric Bursting Tester KYUNG DO KDP., LTD. KDGE-260
Lot 8060429 · 2009
Electric Bursting Tester, KYUNG DO KDP., LTD. KDGE-260, year 2009, serial 091027. Fitted with a load indicator (P-500A), pressure gauge, emergency stop and clamp unit, mounted on a base cabinet. Single phase, rated voltage 220 V, frequency 50 Hz, power consump...
Not placed in a production line

Digital Torque Meter, Gloss Meter, ESD Camera HIOS, Insize
Lot 8060447
Digital Torque Meter, Gloss Meter, ESD Camera, HIOS, Insize. Comprises a Digital Torque Meter (HIOS HP-100), a Gloss Meter (Insize) and an ESD Visualizer Camera (HEV-1000). Supplied with an aluminium case with documentation, a plastic case with operating manua...
Not placed in a production line

Long Digital Caliper Mitutoyo
Lot 8060504
Mitutoyo Long Digital Caliper. Supplied with a wooden case and a Mitutoyo dial indicator.
Not placed in a production line

Bench Power Supplies, Digital Multimeters, Oscilloscope, Torque Testers Protek, Kenwood and more
Lot 8060505
Bench Power Supplies, Digital Multimeters, Oscilloscope, Torque Testers, Protek, Kenwood and more. The Regulated DC Power Supply (PWS-1803D) is recorded with a fixed voltage of 5 V / 2 A. Included are Kenwood digital multimeters, HIOS torque testers, a Tektron...
Not placed in a production line

(11) Digital Power Meter YOKOGAWA WT210
Lot 8060508
YOKOGAWA WT210 Digital Power Meter. Three-channel display (A, B, C) showing voltage, current, power, power factor and frequency, with integrator functions.
Not placed in a production line

Digital Multimeters and DC Power Supplies Fluke, Kenwood 45, DL-2051
Lot 8060509
Digital Multimeters and DC Power Supplies, Fluke, Kenwood 45, DL-2051. The Kenwood DL-2051 has a fuse of 250 mA F 250 V and a fused 10 A input. Calibration stickers are fitted to several units.
Not placed in a production line

Electrical Safety Analyzers, Media Player, Moisture Meters Chroma, Voltcraft 19032, FM-300
Lot 8060510
Electrical Safety Analyzers, Media Player, Moisture Meters, Chroma, Voltcraft 19032, FM-300. The Electrical Safety Analyzers are marked Twin Ports and carry the front panel marking Max 5kV AC / 6kV DC. Supplied with an LVDS Media Player (K-1090L), a Measuring ...
Not placed in a production line

(4) Digital Phosphor Oscilloscope Tektronix TDS 3032B
Lot 8060511
Tektronix TDS 3032B Digital Phosphor Oscilloscope. Two channels with a colour display, a bandwidth of 300 MHz and a sample rate of 2.5 GS/s.
Not placed in a production line

Personnel Grounding Testers, Earth Ground Tester, Electrostatic Field Meters, Video Generator Fluke, Simco and more
Lot 8060513
Personnel Grounding Testers, Earth Ground Tester, Electrostatic Field Meters, Video Generator, Fluke, Simco and more. Several units carry calibration stickers of HES s.r.o. Supplied with Wristlab personnel grounding testers, a Fluke 1623 earth ground tester, a…
Not placed in a production line

Hardness Photometer HANNA HI 96735
Lot 8060514
HANNA HI 96735 Hardness Photometer. Measuring ranges are P1 Hardness Low Range, P2 Hardness Medium Range and P3 Hardness High Range. Supplied with a carrying case and a set of documentation.
Not placed in a production line

Torque Meter, Force Gauge, Touch Current Tester, Thermometers, Web Sensors HIOS, Imada and more
Lot 8060515
Torque Meter, Force Gauge, Touch Current Tester, Thermometers, Web Sensors, HIOS, Imada and more. The digital temperature measuring devices have a NiCr-Ni sensor type and a measuring range of -50 ... +1150 °C. Supplied with a HIOS HP-100 torque meter and an Im…
Not placed in a production line

(2) Color Meter TES 135A
Lot 8060516
TES 135A Color Meter. Supplied with a carrying case and a connection cable. Made in Taiwan.
Not placed in a production line

Particle Counter, Handheld Measuring Instrument Met One Instruments, INSIZE GT-521
Lot 8060517
Particle Counter, Handheld Measuring Instrument, Met One Instruments, INSIZE GT-521. Supplied with plastic carrying cases, a power adapter and a connection cable.
Not placed in a production line

Laboratory DC Power Supplies Provice, Matrix and more PWS-1803D, 3003B, MPS-7163, AX-3005N-4, HY3005
Lot 8060518
Laboratory DC Power Supplies, Provice, Matrix and more PWS-1803D, 3003B, MPS-7163, AX-3005N-4, HY3005. Recorded ratings include 160V/3A on the laboratory unit, outputs of 0-30V/0-5A x2 and 2.2-15V/1A x2 on the multiple output unit, and a fixed 5V/2A output on …
Not placed in a production line

Test and Measuring Instruments Hako, Lighthouse and more
Lot 8060519
Test and Measuring Instruments, Hako, Lighthouse and more. Sound level meter ranges Lo = 30~80 dB, Med = 50~100 dB, Hi = 80~130 dB, IEC 61672 Type II; force gauge range 500.0 Kg. Supplied with Hako FG-101 and FG-101B soldering testers, a Kane-May KM330, an MC-…
Not placed in a production line

Torque Meters, Torque Wrench, Gap Gauges, Steel Rulers HIOS and Tohnichi
Lot 8060521
HIOS and Tohnichi Torque Meters, Torque Wrench, Gap Gauges, Steel Rulers. Includes a HIOS HP-100 digital torque meter, a digital torque meter with black housing and label H-10i, a Tohnichi dial indicating torque wrench, a box of panel gap gauges and a set of s…
Not placed in a production line

Scales, Digital Micrometers, Digital Inclinometers Martes, Labor, Kinex
Lot 8060522
Scales, Digital Micrometers, Digital Inclinometers, Martes, Labor, Kinex. Martes NT-30E scale: MAX 30 kg, MIN 200 g, e = d = 10 g. Digital micrometer: measuring range 0-25mm, resolution 0.001mm. Calibration labels of HES s.r.o., valid 3.2.2026 to 3.2.2027. Sup…
Not placed in a production line

Digital Force Gauge Insize
Lot 8060523
Insize Digital Force Gauge. Two handheld units, each in its own plastic case, one Insize in a green case and the other in a grey case with a calibration label. Supplied with a second digital force gauge with hook, Allen keys and tip, a USB flash drive, a cable…
Not placed in a production line

(4) Digital Indicator Measuring Fixture
Lot 8060524
Digital Indicator Measuring Fixture. Long aluminium bar with a mounted digital indicator, a measuring probe and white support feet. Calibration sticker, calibration date 3. 2. 2026, valid until 3. 2. 2027.
Not placed in a production line

Charged Plate Monitors, Surface Resistance Meter ION, SIMCO, Wolfgang Warmbier 280, EA-5J, SRM 110
Lot 8060525
Charged Plate Monitors, Surface Resistance Meter, ION, SIMCO, Wolfgang Warmbier 280, EA-5J, SRM 110. The digital charged plate monitor has an LCD display and a plate voltage bar indicator. Supplied with a hand controller, sensor plate, connection cables and a ...
Not placed in a production line

Digital, Dial and Vernier Calipers PROTECO, WÜRTH and more
Lot 8060526
Digital, Dial and Vernier Calipers, PROTECO, WÜRTH and more. Supplied in assorted sizes and makes, most of them in storage cases.
Not placed in a production line

Sound Level Meter, 2 Surface Resistance Meters VOLTCRAFT, EMIT, CHARLESWATER SL-451 (Voltcraft)
Lot 8060527
Sound Level Meter, 2 Surface Resistance Meters, VOLTCRAFT, EMIT, CHARLESWATER SL-451 (Voltcraft). Comprises handheld instruments, each in a foam-lined plastic case. Supplied with 4 yellow cylindrical probes, 2 connecting cables, 2 foam windscreens and 3 carryi...
Not placed in a production line

Pin Gauge Sets, Digital Protractor, Bevel Protractor
Lot 8060528
Pin Gauge Sets, Digital Protractor, Bevel Protractor. Comprises two pin gauge sets, one in a wooden case and one in a black case, a digital protractor with blade in a wooden case and a bevel protractor in a blue case.
Not placed in a production line

Steel Shelving, LCM Testers, Signal Generators Samsung K-270L, MSPG-5200, HAR-100
Lot 8060531
Samsung K-270L, MSPG-5200, HAR-100 Steel Shelving, LCM Testers, Signal Generators. Comprises galvanised steel shelving with bins of connectors. Supplied with a Multi Signal LCM Tester (K-270L), two V-by-One HS Signal Generators (MSPG-5200), a Hot Air Repair Sy...
Not placed in a production line

Tap and Die Set, Digital Caliper, Disc Set
Lot 8060534
Tap and Die Set, Digital Caliper, Disc Set. Supplied with a tap and die set in a metal case, a digital caliper in a case and a disc set of 7 brass discs in a plastic case.
Not placed in a production line

Measuring Instruments Mitutoyo, wenglor and more
Lot 8060536
Measuring Instruments, Mitutoyo, wenglor and more. Supplied with handheld digital thermometer with probes and mini-tripod (Omega), infrared thermometer (TES), laser sensor module (wenglor), optical measuring device in blue case, probe sets in cases and univers...
Not placed in a production line

Precision Levels, Hot Plate Stirrers, RFID Reader IKA, Corning and more
Lot 8060538
Precision Levels, Hot Plate Stirrers, RFID Reader, IKA, Corning and more. Precision level graduated at 1 division 0.02 mm/m, made in Japan. Supplied with 2 precision levels in a wooden case, an IKA C-MAG HP 4 hot plate stirrer, a Corning hot plate stirrer, 2 l...
Not placed in a production line

Hardness Tester, Cordless Screwdriver Set, Pin Gauge Set, Hollow Punch Set, Circuit Board Assembly Makita, Extol Premium, TIME Group Inc
Lot 8060540
Hardness Tester, Cordless Screwdriver Set, Pin Gauge Set, Hollow Punch Set, Circuit Board Assembly, Makita, Extol Premium, TIME Group. The hollow punch set has sizes of 5-6-8-10-11-13-16-19-22-25-28-32-35 mm. Supplied with a hardness tester in carrying case, a...
Not placed in a production line

(200) LCD Monitor Samsung
Lot 8060541
Samsung LCD Monitor. Flat-panel units of various sizes and models, most with a monitor stand, with models S22C300, S24F350FHU and LS22C45K legible. The S24F350FHU is recorded with input DC 14 V, 1.78 A, and the LS22C45K with input AC 100-240 V, 50/60 Hz, 0.45 ...
Not placed in a production line

Video Conferencing System Cisco
Lot 8060547
Cisco Video Conferencing System. Supplied with a Cisco Touch Controller and a wall mount bracket.
Not placed in a production line

(2) Stage Monitor Speaker JBL EON1500
Lot 8060548
JBL EON1500 Stage Monitor Speaker. Power handling is 225W (IEC), with a system impedance of 8 OHMS. Supplied with a Conference Microphone Base Unit with Gooseneck (AKG CS3 DU).
Not placed in a production line

Video Conferencing System Cisco
Lot 8060549
Cisco Video Conferencing System. The touch controller is recorded with part number 74-115968-03 A0, PIDVID CS-TOUCH10 V03 and a power input of 48 V DC, max 0.25 A. Supplied with a Cisco camera with wall bracket, a Cisco TelePresence Touch 10 (TTC5-09) touch co…
Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Material Handling & Logistics — 52 lots · 52 units

Turntable
Lot 8060108
Turntable. Constructed as a mobile aluminium profile frame on castors with levelling feet, fitted with pneumatic lifting cylinders with hand-operated valves, toggle clamps and an aluminium beam assembly. Labelled Main Assembly Cylinder, Top Plate Cylinder and ...
Not placed in a production line

(10) Roller Conveyor
Lot 8060213
Roller Conveyor. Motor-driven, with a steel frame and adjustable feet. Supplied with control boxes with emergency stop switch, fitted to some units.
Not placed in a production line

Lifter Conveyor System
Lot 8060214
Lifter Conveyor System. Glass-enclosed lifter frames with servo motors, sprocket shafts and yellow guard housings, and belt conveyor sections with emergency stop switches, partly dismantled on pallets. Supplied with two control cabinets labelled SKY C/V PANEL ...
Not placed in a production line

(2) Chain Belt Roller Conveyor
Lot 8060219
Chain Belt Roller Conveyor. Steel construction, chain driven, with geared motors. Recorded dimensions are approx. 2500 mm x 1650 mm and approx. 2000 mm x 1700 mm.
Not placed in a production line

(3) Belt Conveyor
Lot 8060220
Belt Conveyor. Continuous rubber belt conveyors on tubular frames, each fitted with an emergency stop button and an isolator switch. Unit dimensions approx. 1650 mm x 1100 mm x 900 mm.
Used in: Molding Line 1 · Part conveyor; Molding Line 2 · Part conveyor; Molding Line 3 · Part conveyor

(5) Belt Conveyor
Lot 8060224
Belt Conveyor. Foam continuous belt conveyor with an aluminium frame, unit dimensions approx. 1150 mm x 1700 mm x 930 mm and belt dimension approx. 400 mm.
Used in: Molding Line 4 · Part conveyor; Molding Line 5 · Part conveyor; Molding Line 6 · Part conveyor; Molding Line 7 · Part conveyor

Transfer Conveyor
Lot 8060230
Transfer Conveyor. Frame with polycarbonate enclosure panels and an overhead linear handling unit with suction grippers; control cabinet with main power AC220V and an Auto / Teach safety mode key switch. Supplied with a control cabinet and a Pro-face touch scr...
Not placed in a production line

Transfer Conveyor
Lot 8060231
Transfer Conveyor. Long frame unit with transparent side panels, overhead linear gantry axis with multi-finger gripper carriage, energy chain and machine-mounted emergency stop, with a control cabinet on main power AC220V and an Auto / Teach safety mode select...
Not placed in a production line

(8) Steel Mobile Trolley
Lot 8060239
Steel Mobile Trolley. Steel frame with two wooden shelves, mounted on swivel casters, with dimensions of approx. 1400 mm x 700 mm x 1250 mm.
Not placed in a production line

(80) Castors
Lot 8060355
Castors. Assorted swivel type with mounting plate, with orange and yellow wheel treads, partly with brake. Loose in a wooden crate and in cartons.
Not placed in a production line

(14) Chain Roller Conveyor
Lot 8060357
Chain Roller Conveyor. Steel construction with geared motors, measuring approx. 1400 mm x 2050 mm. Units differ in design.
Not placed in a production line

(12) Chain Roller Conveyor
Lot 8060358
Chain Roller Conveyor. Constructed in steel, partly fitted with a gear motor and an emergency stop switch. Dimensions approx. 1400 mm x 2050 mm.
Not placed in a production line

(10) Chain Roller Conveyor
Lot 8060373
Chain Roller Conveyor. Steel construction, dismantled and stacked on wooden pallets, with size approx. 1400 mm x 2050 mm. Several units have geared motors and control boxes fitted.
Not placed in a production line

Foam Belt Conveyor System
Lot 8060374
Foam Belt Conveyor System. Continuous units with adjustable aluminium frames, gear motors, emergency stop switches and sub boxes, some with inclined belts; unit dimensions approx. 1350m x 1000mm x 900mm. Supplied with a line control panel with touch screen and...
Not placed in a production line

(8) Belt Conveyor
Lot 8060378
Belt Conveyor. Aluminium frame with green belt by Eurotherm, dimensions approx. 1600 mm x 1360 mm. Driven by a Transtecno gearmotor, type CL040030U TTN, ratio i 30, n1 1400 min-1, n2 46.7 min-1, Mn2 48 Nm, motor voltage 24 V.
Not placed in a production line

Vertical Lifter Conveyor
Lot 8060385
Vertical Lifter Conveyor. Comprises two glass-enclosed lifter towers, each with a belt conveyor carriage, connected by an overhead conveyor, with emergency stop buttons fitted to the towers. Control cabinet labelled 220 Volts. Supplied with two control cabinet...
Not placed in a production line

Floor Scale KRAJSPOL SK s.r.o. KL4PDFWL
Lot 8060395
KRAJSPOL SK KL4PDFWL Floor Scale, serial 0100096193. Maximum capacity 1 500 kg, minimum capacity 10 kg, e = d = 0,5 kg, accuracy class III, platform SB12x15, supply voltage 12 VDc. Calibrated 28.1.2026, valid until 28.1.2027, certificate no. TCM128/10-4727. Su...
Not placed in a production line

Terminal Tractor Kalmar ST122
Lot 8060397
Kalmar ST122 Terminal Tractor. Fitted with a fifth wheel coupling and an enclosed cab, with 2-wheel drive and an Allison transmission with push-button selector. The battery is 12 V / 100 Ah, 750 A (EN). Supplied with an Intek Multi-Standard CB transceiver.
Not placed in a production line

Casters, Leveling Casters M.K Caster 5145S-A1-PC
Lot 8060437
M.K Caster 5145S-A1-PC Casters, Leveling Casters. Pallet of cardboard boxes containing swivel casters with yellow wheels and top mounting plates, plus leveling casters with black base and adjusting bolt. Box label reads 48M/M 6203B, colour per box label Off-Wh...
Not placed in a production line

Forklift Clamp Attachment KAUP
Lot 8060441
KAUP Forklift Clamp Attachment, year 04/03. Maximum load capacity 1000 kg at 600 mm, maximum pressure 200 bar. Weight approx. 655 kg, centre of gravity approx. 495 mm, thickness approx. 126 mm. Made in Germany.
Not placed in a production line

Forklift Clamp Attachment
Lot 8060442
Forklift Clamp Attachment. Recorded data: load centre 136 mm, maximum pressure 200 bar and differential pressure (Δp) 165 bar.
Not placed in a production line

Forklift Clamp Attachment KAUP
Lot 8060443
KAUP Forklift Clamp Attachment, year 10/03, serial 127569-001. Load capacity as clamp 1000 kg, with a hydraulic pressure of 200 bar.
Not placed in a production line

(4) Forklift Fork
Lot 8060444
Forklift Fork. Black forks with hook-type mounts and locking latches, strapped together on a wooden pallet.
Not placed in a production line

(2) Fork Extensions
Lot 8060445
Fork Extensions.
Not placed in a production line

Electric Stacker Jungheinrich EKX 514
Lot 8060450 · 2016
Jungheinrich EKX 514 Electric Stacker, year 2016, serial FN527854. Rated capacity 770 kg at a load centre distance of 700 mm, with a system voltage of 80 V and nominal power of 9,0 kW. Supplied with a Jungheinrich SLT 100 JH battery charger and an 80 V tractio...
Not placed in a production line

Electric Forklift Jungheinrich EKX 514
Lot 8060451 · 2016
Jungheinrich EKX 514 Electric Forklift, year 2016, serial FN527856. Rated capacity 770 kg, load centre distance 700 mm, lift heights 9280 / 7500 / 7000 mm, battery voltage 80 V, nominal power 9,0 kW, weight without battery approx. 6577 kg. Supplied with a Jung...
Not placed in a production line

Electric Forklift Jungheinrich EKX 514
Lot 8060452 · 2016
Jungheinrich EKX 514 Electric Forklift, year 2016, serial FN528880. High-rack stacker with operator cab lifting with the load, swivel fork head and triplex mast; rated capacity 770 kg at 700 mm load center, 600 kg at 9280 mm lift height, 9,0 kW nominal power. ...
Not placed in a production line

Electric Forklift Jungheinrich EKX 514
Lot 8060453 · 2016
Jungheinrich EKX 514 Electric Forklift, year 2016, serial FN527858. Rated capacity 770 kg at 700 mm load centre, 600 kg at 9280 mm lift height, 80 V system voltage, 9,0 kW nominal power and truck mass approx. 6577 kg without battery. Supplied with a Jungheinri...
Not placed in a production line

Electric Forklift Truck Jungheinrich EKX 514
Lot 8060454 · 2016
Jungheinrich EKX 514 Electric Forklift Truck, year 2016, serial FN527857. Rated capacity 770 kg at a load centre distance of 700 mm, with 80 V battery voltage, nominal power 9,0 kW and a weight of 6577 kg. Supplied with a Jungheinrich SLT 100 JH battery charge...
Not placed in a production line

Electric Forklift Jungheinrich EKX 514
Lot 8060455 · 2016
Jungheinrich EKX 514 Electric Forklift, year 2016, serial FN528878. Rated capacity 770 kg at a 700 mm load centre distance, system voltage 80 V, nominal power 9,0 kW, mass without battery approx. 6573 kg. Supplied with a Jungheinrich SLT 100 JH battery charger...
Not placed in a production line

Electric Forklift Jungheinrich EKX 514
Lot 8060456 · 2016
Jungheinrich EKX 514 Electric Forklift, year 2016, serial FN528874. Rated capacity 770 kg at a 700 mm load centre distance, with 80 V system voltage, 9,0 kW nominal power and a truck mass of 6573 kg without battery. Supplied with a Jungheinrich SLT 100 JH batt...
Not placed in a production line

Floor Scale KRAJSPOL SK s.r.o. KL4PVD310
Lot 8060458 · 2010
KRAJSPOL SK KL4PVD310 Floor Scale, year 2010, serial 9917022046. Maximum capacity 1500 kg, minimum capacity 10 kg, e = d = 500 g, accuracy class III, supply voltage 12 V, operating temperature -10°C/+40°C. Supplied with a Dibal VD-310 weighing indicator.
Not placed in a production line

Electric Forklift Jungheinrich EKX 514
Lot 8060459 · 2017
Jungheinrich EKX 514 Electric Forklift, year 2017, serial FN528877. Rated capacity 770 kg at 700 mm load centre, 600 kg at 9280 mm lift height, system voltage 80 V, nominal power 9,0 kW and mass without battery approx. 6573 kg. Supplied with a Jungheinrich SLT...
Not placed in a production line

Electric Forklift Jungheinrich EKX 514
Lot 8060460 · 2016
Jungheinrich EKX 514 Electric Forklift, year 2016, serial FN528873. Rated capacity 770 kg at a load centre distance of approx. 700 mm, with a system voltage of 80 V and nominal power of 9,0 kW. Mass without battery approx. 6573 kg, battery mass 1232/1362 kg. S...
Not placed in a production line

(3) Hand Pallet Truck TVH Parts N.V. TRP0003
Lot 8060461 · 2017
TVH Parts TRP0003 Hand Pallet Truck, year 2017, serial 17051395M/137. Rated capacity 2500 kg, with option PTP 685x1150. Net weight approx. 79 kg, country of origin Malaysia.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060462
Hand Pallet Truck. Maximum load capacity of 2500 kg.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060463
Hand Pallet Truck. Capacity 2500 kg, with a fork width of 540 mm and a fork length of 1150 mm. Finished in yellow.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060464
Hand Pallet Truck.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060465
Hand Pallet Truck.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060466
Hand Pallet Truck.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060467
Hand Pallet Truck.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060468
Hand Pallet Truck.
Not placed in a production line

(3) Hand Pallet Truck
Lot 8060469
Hand Pallet Truck. Capacity is recorded as 1500 kg, as shown on the capacity label.
Not placed in a production line

Mobile Lifting Frame
Lot 8060470
Mobile Lifting Frame. Mobile steel frame on casters with levelling feet, top beam with pulleys and wire ropes with hooks, fitted with a heavy duty hand winch, 500 kg. Supplied with a heavy duty hand winch (Junda) and a fall arrester.
Not placed in a production line

Mobile Lifting Frame
Lot 8060472
Mobile Lifting Frame. Black steel frame on castors with two wire rope hand winches, hooks and shackles; the Junda hand winch is recorded with durability 500 kg. The fall arrester is rated 50 kg minimum to 300 kg maximum, with 5 m rope length, to GB 24544-2023....
Not placed in a production line

Racking Components, Roller Conveyor Sections, Steel Profiles, Locker Cabinet
Lot 8060473
Racking Components, Roller Conveyor Sections, Steel Profiles, Locker Cabinet. Comprises grey powder-coated steel beams with mounting plates, galvanized steel profiles and angle sections, roller conveyor sections with yellow end brackets, blue steel beams, blac...
Not placed in a production line

(16) Hand Pallet Truck
Lot 8060479
Hand Pallet Truck.
Not placed in a production line

Lifter Conveyor System
Lot 8060480
Lifter Conveyor System. Fitted with two glass-enclosed lifter towers with belt transfer conveyors, connected by an overhead conveyor bridge, and a 220 VOLTS control cabinet with Main Power, Motor Power, Start, Stop, Reset, Buzzer Stop, Auto / Teach safety mode...
Not placed in a production line

(7) Hand Pallet Truck
Lot 8060501
Hand Pallet Truck.
Not placed in a production line

(11) Hand Pallet Truck
Lot 8060502
Hand Pallet Truck. Comprises hand pallet trucks in differing colours and designs, at least one fitted with an integrated weighing scale with display.
Not placed in a production line

(5) Platform Scale TScale
Lot 8060529
TScale Platform Scale. Maximum capacity 150 kg, as stated on the label.
Not placed in a production line

Wheel Chocks and Strapping Tools AL-KO, ITATOOLS
Lot 8060530
Wheel Chocks and Strapping Tools, AL-KO, ITATOOLS. Supplied with battery strapping tools model ITA24, battery charger and wheel chocks in steel and plastic.
Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Storage & Racking — 47 lots · 47 units

(4) Aluminum Cabinet
Lot 8060050
Aluminum Cabinet. Aluminium profile frame with transparent double doors, two compartments over two levels, slotted rail shelves and levelling casters. Dimensions approx. 160 x 150 x 64.
Not placed in a production line

Clean Locker
Lot 8060102
Clean Locker. Open-front cabinet with hanging rail, perforated floor, filter grid in the ceiling, castors and levelling feet. Control panel with power, fan and lamp switches and a differential pressure gauge, scale 0 to 50 mm of water.
Not placed in a production line

(5) Clean Locker
Lot 8060105
Clean Locker. Free-standing cabinet with hanging rail, perforated floor panel, castors and a filter grille in the ceiling of the compartment. Control panel marked CLEAN LOCKER with differential pressure gauge, one red and two green pilot lights or push buttons…
Not placed in a production line

(4) Clean Locker
Lot 8060106
Clean Locker. Free-standing, with the control panel above the open compartment, a ceiling air outlet grille, a stainless steel hanging rod, a perforated floor, castors and levelling feet. The control panel carries a differential pressure gauge with a scale of …
Not placed in a production line

Pallet Rack SLP GMBH SL, RTS
Lot 8060186 · 2018
SLP SL, RTS Pallet Rack, year 2018. Rack bay with four beam levels, blue uprights and orange beams, the top level fitted with wire mesh decking. Cell length 3600 mm, 4 cells in column, cell load capacity 2000 kg, column load capacity 8000 kg, with a handwritte…
Not placed in a production line

Work Bench, Metal Cabinet MALOW
Lot 8060188
MALOW Work Bench, Metal Cabinet. Work bench with wooden worktop and green mat covering, perforated back panel with hooks and rails, three drawers, open shelf compartments and one lockable door compartment; two-door metal cabinet in blue and grey. Supplied with…
Not placed in a production line

(2) Metal Locker Cabinet
Lot 8060190
Metal Locker Cabinet. Grey metal body with blue doors, 3 columns, cam locks with keys. First locker has 7 compartments per column (21 compartments, numbered 2965-2985), second locker has 10 compartments per column (30 compartments, numbered 4004-4033). Dimensi…
Not placed in a production line

(2) Metal Locker Cabinet
Lot 8060191
Metal Locker Cabinet. Each unit has 30 lockable compartments in 3 columns of 10, with blue doors and a grey steel body. Each door has a cylinder lock, and the compartments are numbered 4034-4063 and 4064-4093.
Not placed in a production line

(2) Metal Locker Cabinet
Lot 8060192
Metal Locker Cabinet. Fitted with 30 lockable compartments in 3 columns of 10, with blue doors, a grey body and key locks. Dimensions approx. 90 x 50 x 180.
Not placed in a production line

(5) Metal Locker
Lot 8060193
Metal Locker. Two-door units with blue doors and grey bodies, each with two compartments fitted with ventilation louvres and twist handle locks. The open compartment shows one shelf and one hanging rail with hooks.
Not placed in a production line

(2) Metal Locker Cabinet metaloBox
Lot 8060194
metaloBox Metal Locker Cabinet. Each cabinet has 21 compartments (3 columns x 7 rows), with a grey body and blue doors fitted with key locks. Compartments are numbered 3007-3027 and 2986-3006.
Not placed in a production line

(2) Metal Locker Cabinet metalobox
Lot 8060195
metalobox Metal Locker Cabinet. Configured with 3 columns and 7 rows of lockable compartments, giving 21 compartments per unit, numbered 2944-2964 and 2923-2943.
Not placed in a production line

(2) Metal Locker
Lot 8060196
Metal Locker. Each unit has 21 lockable compartments arranged in 3 columns of 7, with a grey body and blue doors. Compartment numbers run 2902-2922 and 2881-2901.
Not placed in a production line

Metal Locker
Lot 8060197
Metal Locker. Two-compartment construction with blue doors and a grey body, ventilation louvres in the upper and lower door sections, and turn-handle cylinder locks. A shelf is fitted in the upper part of the left compartment, and both doors carry "VIP" labels...
Not placed in a production line

(2) Metal Locker Cabinet
Lot 8060198
Metal Locker Cabinet. Each cabinet has 3 columns of 10 lockable compartments, 30 compartments per cabinet, with blue doors, cylinder locks and a grey body. Compartment numbers 3854-3883 and 3884-3913.
Not placed in a production line

(2) Metal Locker Cabinet
Lot 8060199
Metal Locker Cabinet. Comprises 30 compartments in 3 columns of 10, with a grey frame and blue doors fitted with key locks. Compartments are numbered 3764-3793.
Not placed in a production line

(2) Metal Locker Cabinet
Lot 8060200
Metal Locker Cabinet. Free-standing, with 30 numbered compartments arranged in 3 columns of 10, each compartment having a hinged door and a key lock. The compartment doors carry barcode labels and Czech notice stickers.
Not placed in a production line

(57) Metal Locker
Lot 8060201
Metal Locker. Locker units with two compartments each, blue doors and grey body. Cylinder lock handles, ventilation slots and label holders on the doors, with a shelf in the upper part of each compartment.
Not placed in a production line

(56) Metal Locker
Lot 8060202
Metal Locker. Single-door steel construction with blue doors and grey bodies. Doors have ventilation slots, handles with cylinder locks and a card holder. Inside are an upper shelf and hanging space. Numbered labels with barcodes are fitted on top.
Not placed in a production line

(74) Metal Locker
Lot 8060203
Metal Locker. Single-door construction with blue doors and a grey frame. Fitted with ventilation slots, label holders and cylinder lock handles.
Not placed in a production line

(74) Metal Locker
Lot 8060204
Metal Locker. Single-door construction with a blue door and grey body, ventilation slots, a turn handle with cylinder lock and one internal shelf.
Not placed in a production line

(78) Metal Locker
Lot 8060205
Metal Locker. Tall locker with blue doors and a grey body, ventilation slots in the doors and cylinder lock handles. Each compartment has a shelf at the top and a clothes rail.
Not placed in a production line

(75) Metal Locker
Lot 8060206
Metal Locker. Blue doors and grey bodies, with single-door compartments installed in rows. Each compartment has a shelf, a clothes rail, ventilation slots and a turn handle lock.
Not placed in a production line

(55) Metal Locker
Lot 8060207
Metal Locker. Single-compartment construction with blue doors and a grey body, fitted with ventilation slots and a cylinder lock handle. The interior has a shelf and a hanging rail.
Not placed in a production line

(56) Metal Locker
Lot 8060208
Metal Locker. Single-door design with a blue door and a light grey body, ventilation slots in the door and a turn handle with cylinder lock.
Not placed in a production line

(55) Metal Locker
Lot 8060209
Metal Locker. Single-door sheet steel construction with blue doors and grey bodies, ventilation slots in the doors, and padlocks fitted to some doors.
Not placed in a production line

(54) Metal Locker
Lot 8060210
Metal Locker. Single-door construction with blue doors and a grey carcass. Ventilation slots in the doors, cylinder locks and an internal coat rail.
Not placed in a production line

(75) Metal Locker
Lot 8060211
Metal Locker. Single-compartment locker with a blue louvred door and grey body. Fitted with an upper shelf, a hanging rail with hooks and a door handle with lock mechanism.
Not placed in a production line

(76) Metal Locker
Lot 8060212
Metal Locker. Grey body with blue doors, ventilation slots in the doors and rotary handle latches. Each compartment is fitted internally with a shelf and a coat rail.
Not placed in a production line

Container
Lot 8060238
Container.
Not placed in a production line

(3) Spill Containment Tray Denios classic-line 1 FA
Lot 8060356 · 2024
Denios classic-line 1 FA Spill Containment Tray, year 2024, serial 112166722-000100-001, 112166722-000100-002, 112124210-000100-001. Material 1.0038, load capacity 400 kg at uniform load, collecting volume 217 l, storage medium according to StawaR. Supplied wi…
Not placed in a production line

Pallet Racking and Stock Goods SLP GMBH SL, RTS
Lot 8060381 · 2018
SLP SL, RTS Pallet Racking and Stock Goods, year 2018. Cell length 3600 mm, with 2 cells per column and a load capacity of 2000 kg per cell and 4000 kg per column. Supplied with 2 Hakko FR-810B SMD rework stations, Mitsubishi Electric servo amplifiers MR-J4W3-…
Not placed in a production line

Pallet Racking
Lot 8060414
Pallet Racking. Blue uprights measuring 2500 x 1000 and orange cross members of 3600, fitted with steel wire mesh shelves. Supplied with 6 uprights, 18 cross members and 9 steel shelves.
Not placed in a production line

Rack Servers, Firewalls and PC Dell EMC, Sophos and more
Lot 8060419
Rack Servers, Firewalls and PC, Dell EMC, Sophos and more. Dell EMC rack servers, further rack servers with 750 W power supply units and Microsoft Windows Server 2019 STD ROK (16 Core) licence, Sophos 19 Inch firewall appliances, rackmount chassis and a PC tow…
Not placed in a production line

Spill Containment Sump DENIOS
Lot 8060435
DENIOS Spill Containment Sump. Blue painted steel sump on feet with steel bar grating, brand label classic-line. Supplied with a steel grating.
Not placed in a production line

Pallet Racking SLP GMBH
Lot 8060474 · 2020
SLP Pallet Racking, year 2020. Comprises uprights, bracing and beams, installed in several rows, with a cell length L of 3600 mm, a load capacity of 2000 kg per cell and per upright, and a maximum pallet weight of 500 kg. Supplied with wire mesh decks fitted t…
Not placed in a production line

Steel Shelving Rack
Lot 8060475
Steel Shelving Rack. Galvanised steel shelving bays with perforated uprights and steel shelf levels, arranged in several rows and fitted with yellow level markings and storage location labels.
Not placed in a production line

Rack Systems Dismantled
Lot 8060476
Rack Systems Dismantled
Not placed in a production line

Pallet Racking System
Lot 8060477
Pallet Racking System. Multi-level racking with blue uprights, orange cross members and galvanised wire mesh shelves, with yellow upright protectors fitted at the base. Supplied with approx. 43 uprights, approx. 330 cross members and approx. 160 shelves.
Not placed in a production line

Pallet Racking
Lot 8060478
Pallet Racking. Multi-bay racking with blue uprights, orange cross members and galvanised wire mesh decks, arranged on three beam levels with yellow base guards on the uprights, dimensions approx. 4000 x 1100 x 3600. Supplied with 9 uprights and 46 cross membe...
Not placed in a production line

Steel Shelving Unit
Lot 8060500
Steel Shelving Unit. Constructed with perforated uprights, steel shelf panels and diagonal bracing wires, with a load capacity of 100 kg per shelf and 300 kg per rack. Inspection sticker (Pro Man) marked 2027.
Not placed in a production line

(10) Metal Locker Cabinet abamet
Lot 8060542
abamet Metal Locker Cabinet. Two-column construction with individual compartment doors, each fitted with a key lock. Door finish in green and grey.
Not placed in a production line

(5) Metal Locker
Lot 8060543
Metal Locker. Blue doors on a grey carcass, each block with 3 columns of 10 compartments, 30 compartments per block, fitted with cylinder locks. Compartments are numbered, those of the first block running from 4094 to 4123, and several doors are open.
Not placed in a production line

(7) Metal Locker abamet
Lot 8060544
abamet Metal Locker. Two columns of twelve compartments, with green and grey doors fitted with cylinder locks. Compartment numbers 4538-4561.
Not placed in a production line

(4) Metal Locker Cabinet
Lot 8060545
Metal Locker Cabinet. Blue doors and grey bodies, arranged as a locker bank of 3 columns of 10 compartments each. Each compartment has a key lock, a number label and a barcode label, with compartment numbers 3794-3823 on the bank carrying the lot sticker.
Not placed in a production line

Audio Rack, Microphone, Column Speaker KELine, Crown and more
Lot 8060551
Audio Rack, Microphone, Column Speaker, KELine, Crown and more. Mobile rack cabinet with glazed door, on castors, fitted with audio equipment. Supplied with a Crown XLS 2002 power amplifier, a dbx DriveRack PA2 speaker management system, an MX821S 8-channel mi...
Not placed in a production line

Rack Cabinet Triton
Lot 8060554
Triton Rack Cabinet. Mobile rack cabinet with glazed door, on castors. Supplied with a Crown XLS 2002 power amplifier, a dbx DriveRack PX loudspeaker processor, an MX821S eight channel mic/line mixer with stereo outputs, two AKG Perception Wireless SR 45 wirel...
Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Packaging & Labelling — 35 lots · 35 units

Vacuum Packing Machine CM KOREA VAC CM600
Lot 8060184
CM KOREA VAC CM600 Vacuum Packing Machine. Stainless steel construction with a vacuum chamber and transparent lid, a control panel with digital display and vacuum gauge (scale -0.1 MPa), and castors. Control keys are labelled Vacuum, Gas, Sealing and Cooling. ...
Not placed in a production line

Stretch Wrapping Machine SIAT SW2M
Lot 8060215 · 2007
SIAT SW2M Stretch Wrapping Machine, year 2007, serial 64839. Rated at 400 V, 3 phase, 50 Hz, with a current of 5,2 A and a power of 1440 W. Recorded as type 16-PW-4CF+, part number FAMWSSEMIAUTO.
Used in: Molding shared · Packing

Stretch Wrapper SIAT SW2M
Lot 8060216 · 2006
SIAT SW2M Stretch Wrapper, year 2006, serial 55474. Turntable machine with mast, type 16-PW-4CF+, part number FAMWSSEMIAUTO, rated 400 V, 3 phase, 50 Hz, 5,2 A and 1440 W. Supplied with a signal light tower.
Not placed in a production line

Pallet Stretch Wrapper SIAT SW2M
Lot 8060217 · 2007
SIAT SW2M Pallet Stretch Wrapper, year 2007, serial 64848. Comprises a turntable with roller conveyor, a mast with film carriage and a control panel. Rated at 400 V, 50 Hz, 3 phase, with a current of 5,2 A and a power of 1440 W.
Not placed in a production line

Stretch Wrapping Machine SIAT SW2M
Lot 8060225 · 2007
SIAT SW2M Stretch Wrapping Machine, year 2007, serial 64847. Part number FAMWSSEMIAUTO, type 16-PW-4CF+. Rated at 400 V, 3 phase, 50 Hz, with a current of 5,2 A and a power of 1440 W.
Not placed in a production line

Pallet Stretch Wrapping Machine SIAT SW2M
Lot 8060226 · 2007
SIAT SW2M Pallet Stretch Wrapping Machine, year 2007, serial 64483. Rated at 400 V, 50 Hz, 3 phase, with a current of 5,2 A and a power of 1440 W. Recorded type 16-PW-4CF+, part number FAMWSSEMIAUTO.
Not placed in a production line

Pallet Wrapping Machine SIAT SW2M
Lot 8060227 · 2007
SIAT SW2M Pallet Wrapping Machine, year 2007, serial 64842. Operator panel with manual mode keys, programme selection P1 to P4, emergency stop and main switch, with panel labels in Slovak. Electrical data: 400 V, 3 phase, 50 Hz, 5,2 A, 1440 W.
Not placed in a production line

Pallet Wrapping Machine SIAT SW2M 16-PW-4CF+
Lot 8060232 · 2007
SIAT SW2M 16-PW-4CF+ Pallet Wrapping Machine, year 2007, serial 64945. Fitted with a round turntable, a mast with film carriage, and an operator panel with main switch and emergency stop. Rated at 400 V, 50 Hz, 3 phase, 5,2 A and 1440 W, with a power cable and...
Not placed in a production line

Pallet Stretch Wrapper SIAT SW2M
Lot 8060233 · 2007
SIAT SW2M Pallet Stretch Wrapper, year 2007, serial 64944. Turntable stretch wrapper with mast and film carriage, type 16-PW-4CF+, part number FAMWSSEMIAUTO. Rated voltage 400 V, 50 Hz, 3 phase, current 5,2 A, power 1440 W.
Not placed in a production line

Pallet Wrapping Machine SIAT SW2
Lot 8060234 · 2017
SIAT SW2 Pallet Wrapping Machine, year 2017, serial SWSEMIAUTO047750025. Fitted with a rotating turntable, a mast with film carriage, and a control panel with emergency stop button and signal light. Rated at 220-240 V, 50-60 Hz, single phase, 5.2 A and 1440 W.
Not placed in a production line

Pallet Wrapping Machine SIAT SW2M
Lot 8060235 · 2007
SIAT SW2M Pallet Wrapping Machine, year 2007, serial 64838. Rated at 400 V, 50 Hz, 3 phase, with a current of 5.2 A and a power of 1440 W. Supplied with a turntable.
Not placed in a production line

Shrink Wrapping Machine smipack SL 45
Lot 8060245 · 2013
smipack SL 45 Shrink Wrapping Machine, year 2013, serial 42996. Electrical data: AC input 1PH+N+PE 220-240, frequency 50-60 Hz, power 1650 W, current 7 A. Code ZA440004, made in Italy.
Not placed in a production line

(9) Label Printer datamax·o'neil H-4408
Lot 8060311
datamax·o'neil H-4408 Label Printer, serial 41530016, 34730067, 42330035, 64130119, 54030025, 34730068, 52530019, 52530020, 54030023. Rated voltage 115-230 VAC, 50-60 Hz, with a current of 3.0-1.5A, from the H-CLASS family.
Not placed in a production line

Dual Banding Machine (defective) DAE EUN EMBI Co., Ltd. DE-960AS
Lot 8060354 · 2022
DAE EUN EMBI DE-960AS Dual Banding Machine, year 2022, serial DE20220715-05. Weight approx. 1400 kg, dimensions approx. 2300L x 2750W x 2150H, utility spec 48-65 Inch, voltage Ø3, 220V, 50Hz, with touch panel control and strap reel holders. Supplied with a rol...
Not placed in a production line

Turntable Stretch Wrapper SIAT SW2M
Lot 8060359 · 2007
SIAT SW2M Turntable Stretch Wrapper, year 2007, serial 64851. Turntable with inclined mast and film carriage, control panel with Czech and Slovak labelling. Recorded data: type 16-PW-4CF+, part number FAMWSSEMIAUTO, 400 V, 3 phase, 50 Hz, 5,2 A, 1440 W.
Not placed in a production line

Stretch Wrapping Machine SIAT SW2M
Lot 8060360 · 2007
SIAT SW2M Stretch Wrapping Machine, year 2007, serial 64837. Round turntable with roller section, film carriage mast and control panel. Rated voltage 400 V, 3 phase, 50 Hz, current 5,2 A, power 1440 W.
Not placed in a production line

Stretch Wrapping Machine SIAT SW2M
Lot 8060361 · 2007
SIAT SW2M Stretch Wrapping Machine, year 2007, serial 64484. Rated at 400 V, 50 Hz, 3 phase, with a current of 5,2 A and a power of 1440 W. Type 16-PW-4CF+, part number FAMWSSEMIAUTO.
Not placed in a production line

Stretch Wrapping Machine SIAT SW2M
Lot 8060362 · 2007
SIAT SW2M Stretch Wrapping Machine, year 2007, serial 64849. Fitted with a mast, film carriage and turntable with roller surface, and a control panel with Czech and Slovak labelling. Rated voltage 3~ / 400 V, 50 Hz, current 5,2 A, power 1440 W, part number FAM...
Not placed in a production line

Stretch Wrapping Machine SIAT SW2M
Lot 8060363 · 2007
SIAT SW2M Stretch Wrapping Machine, year 2007. Fitted with a roller top turntable and a column-mounted control panel. Recorded data: part number FAMWSSEMIAUTO, type 16-PW-4CF+, 400 V, 50 Hz, 3 phase, 5.2 A and 1440 W.
Not placed in a production line

Pallet Wrapping Machine SIAT SW2M
Lot 8060364 · 2007
SIAT SW2M Pallet Wrapping Machine, year 2007, serial 64840. Rated at 400 V, 50 Hz, 3 phase, with a current of 5,2 A and a power of 1440 W. Supplied with an entry ramp.
Not placed in a production line

Pallet Stretch Wrapping Machine SIAT SW2M
Lot 8060365 · 2007
SIAT SW2M Pallet Stretch Wrapping Machine, year 2007, serial 64946. Turntable design with mast, film carriage, operator control panel and emergency stop, type 16-PW-4CF+, part number FAMWSSEMIAUTO. Electrical data: 400 V, 50 Hz, 3-phase, current 5,2 A, power 1...
Not placed in a production line

Pallet Stretch Wrapping Machine SIAT SW2M
Lot 8060366 · 2006
SIAT SW2M Pallet Stretch Wrapping Machine, year 2006, serial 55765. Turntable stretch wrapping machine with roller turntable, film pre-stretch carriage on mast and operator control panel, type 16-PW-4CF+, part number FAMWSSEMIAUTO. Electrical connection 400 V,...
Not placed in a production line

Pallet Wrapping Machine SIAT SW2M
Lot 8060367 · 2006
SIAT SW2M Pallet Wrapping Machine, year 2006, serial 55765. Turntable wrapping machine with column, film carriage and control panel, type 16-PW-4CF+, part number FAMWSSEMIAUTO. Rated at 400 V, 50 Hz, 3 phase, 5,2 A and 1440 W.
Not placed in a production line

Pallet Wrapping Machine
Lot 8060390
Pallet Wrapping Machine. Turntable design with mast, film carriage, control panel with emergency stop and drive motor. The mast is lying down on pallets, the wiring is disconnected and the terminal box is open.
Not placed in a production line

Vacuum Packaging Machine MAGICSEAL SM600-L
Lot 8060391
MAGICSEAL SM600-L Vacuum Packaging Machine. Floor-standing unit with a stainless steel housing, transparent lid, rotary main switch and four castors. The control panel carries a pressure gauge, a display and indicators for vacuum, gas, seal and cool.
Not placed in a production line

Label Printers Honeywell, Zebra, Avery Dennison PX940, ZM400, AP 5.4
Lot 8060448
Label Printers, Honeywell, Zebra, Avery Dennison PX940, ZM400, AP 5.4. Supplied with an electronic unit with finned housing and a display unit with probe. The Honeywell printers are recorded with the housing open.
Not placed in a production line

Pallet Stretch Wrapping Machine SIAT SW2M
Lot 8060555 · 2007
SIAT SW2M Pallet Stretch Wrapping Machine, year 2007. Recorded data: type 16-PW-4CF+, part number FAMWSSEMIAUTO, 400 V, 50 Hz, 3 phase, current 5.2 A, power 1440 W.
Not placed in a production line

Pallet Stretch Wrapper SIAT SW2M
Lot 8060394 · 2007
SIAT SW2M Pallet Stretch Wrapper, year 2007, serial 64834. Rated voltage 400 V, 3 phase, 50 Hz, with a current of 5.2 A and a power of 1440 W. Part number FAMWSSEMIAUTO, type 16-PW-4CF+.
Not placed in a production line

Pallet Stretch Wrapper SIAT SW2M
Lot 8060457 · 2007
SIAT SW2M Pallet Stretch Wrapper, year 2007, serial 64852. Round turntable with a column carrying the film carriage and control panel, column marked M.J. MAILLIS PR 102. Rated 400 V, 50 Hz, 3 phase, 5.2 A and 1440 W, with part number FAMWSSEMIAUTO.
Not placed in a production line

Pallet Stretch Wrapping Machine SIAT
Lot 8060556
SIAT Pallet Stretch Wrapping Machine. Turntable pallet wrapper with a mast-mounted film carriage, fitted with an operator panel with key switch, a main switch and an emergency stop.
Not placed in a production line

(51) Label Printer Zebra ZT411, ZT420, ZT410, ZM400
Lot 8060417
Zebra ZT411, ZT420, ZT410, ZM400 Label Printer. Print resolution is 300 DPI, marked on some units.
Not placed in a production line

Strapping Machine FEIFER TP 410
Lot 8060471 · 2018
FEIFER TP 410 Strapping Machine, year 2018, serial S17094182. Electric power 400 W, voltage 230 V, frequency 50 Hz.
Not placed in a production line

Vacuum Packing Machine CM KOREA VAC CM-600
Lot 8060559
CM KOREA VAC CM-600 Vacuum Packing Machine. Stainless steel housing on castors with a transparent lid, a vacuum gauge and a digital control panel, plus additional control panel overlays in Slovak and Ukrainian. Rated voltage 220 V, 50/60 HZ, basic dimensions a...
Not placed in a production line

Strapping Tools Fromm
Lot 8060446
Fromm Strapping Tools. Battery pack 14.4 V. Supplied with blue and black Fromm strapping tools, a strapping tool (ORT 250), 14.4 V battery packs, Fromm battery packs and a Fromm charger (MCU).
Not placed in a production line

(7) PP Strapping Band Rolls Power Band
Lot 8060503
Power Band PP Strapping Band Rolls. Polypropylene (PP, recycled) band on cardboard cores, machine grade, width 18, thickness 0.80, length 2300M and weight 21KG per labelled roll, part no. 6922-000421. Rolls are shrink-wrapped and strapped, stacked on a wooden ...
Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Workshop & Machine Tools — 27 lots · 27 units

Drilling and Milling Machine Bernardo KF 25 D Vario
Lot 8060187 · 2022
Bernardo KF 25 D Vario Drilling and Milling Machine, year 2022, serial PWA-2220086. Power 0,6 kW. Supplied with a base cabinet, a drill chuck and a table power feed unit.
Not placed in a production line

Cut-Off Saw Milwaukee CHS 355
Lot 8060189
Milwaukee CHS 355 Cut-Off Saw. Rated at 2300 W, 10.5 A, 220 - 240 V and 50 / 60 Hz, with a no-load speed of n0 = 3800 min-1. Wheel size Ø 355 mm x Ø 25.4 mm.
Not placed in a production line

Air Compressor Güde 400/10/50 N
Lot 8060368 · 2021
Güde 400/10/50 N Air Compressor, year 2021, serial 77548. Rated at 230 V~, 50 Hz with a 2.2 kW / 3 PS motor, S3 (50%), it has an intake capacity of approx. 395 l/min, an effective delivery of approx. 250 l/min, a 50 l tank and a maximum pressure of 10 bar. Wei…
Not placed in a production line

Compressor Scheppach HC53DC
Lot 8060369 · 2024
Scheppach HC53DC Compressor, year 2024, serial 0145 -02459. Rated at 2,2 kW (3.0 HP on the housing label), 230 V ~ 50 Hz, with a full load current of 9,5 A and a speed of 2850 min-1. Tank volume 50 l, max. pressure 10 bar, weight 38kg, protection class IPX2.
Not placed in a production line

Air Compressor Einhell TC-AC 420/50/10 V
Lot 8060370 · 2021
Einhell TC-AC 420/50/10 V Air Compressor, year 2021. Rated voltage 220 - 240 V ~, 50 Hz, power 2200 W, speed 2850 min-1, free air delivery 420 l/min, max. pressure 10 bar max, tank volume 50 l, weight approx. 41 kg. Supplied with a spiral air hose.
Not placed in a production line

Compressor Scheppach HC53DC
Lot 8060371 · 2024
Scheppach HC53DC Compressor, year 2024, serial 0145 -02455. Rated at 2,2 kW on 230 V ~ 50 Hz with a load current of 9,5 A, it has a 50 l tank and a maximum pressure of 10 bar. Speed is 2850 min-1, sound power level 93 dB, weight 38 kg and protection class IPX2…
Not placed in a production line

Band Saw PROMA PPK - 200 U
Lot 8060372 · 2015
PROMA PPK - 200 U Band Saw, year 2015, serial B2015/1047. Band speeds of 24/ 41/ 61/ 82 m/ min, band size 2360 x 0,9 x 20 mm, with max. cutting capacity of 205 x 215 mm at 90° and 205 x 135mm at 45°. Power input 1,1 kW at 3/N PE AC/ 400 V 50 Hz. Supplied with …
Not placed in a production line

Metal Band Saw OPTIMUM S 275N
Lot 8060398 · 2015
OPTIMUM S 275N Metal Band Saw, year 2015, serial 20152545. Saw band approx. 2.480 x 27 x 0.9 mm with blade speeds of 45/90 m/min. Cutting capacity at 0° is rectangular approx. 235 x 150 mm and round approx. Ø 225 mm. Drive motor 1.1 kW, 400 V, 50 Hz. Weight ap…
Not placed in a production line

Metal Band Saw Optimum OPTI S 275 G
Lot 8060399
Optimum OPTI S 275 G Metal Band Saw, serial 20125443. Cutting capacity 180 x 245 mm rectangular at 0°, 160 x 160 mm square and 160 mm round at 45°, blade 2480 x 27 x 0.9 mm, motor 1.1 kW, 400 V. Stand with chip tray, control panel with emergency stop, foot swi…
Not placed in a production line

Geared Head Drilling Machine HOLZMANN MASCHINEN ZS 50APS
Lot 8060400 · 2022
HOLZMANN MASCHINEN ZS 50APS Geared Head Drilling Machine, year 2022, serial 302590322. Rated voltage 400 V / 3 / 50 Hz, power 1.3 kW/1.8 kW, spindle speed n=50-2520 min-1 (12), weight approx. 390 kg. Supplied with a Holzmann ZX7025A cross table, a machine vice…
Not placed in a production line

Welding Machine Kemppi Minarc 220
Lot 8060401
Kemppi Minarc 220 Welding Machine, serial 1842196 B. Mains supply 3~ 50-60 Hz, U1=380/400V, fuse 10 A, I1max=12A, enclosure rating IP23S, welding range 10A/20,4V-220A/28,8V with I2 220 A at U2 28,8 V. Supplied with an electrode holder with cable, an earth clam…
Not placed in a production line

MIG/MAG Welding Machine Stamos Germany S-MIG 250
Lot 8060402
Stamos Germany S-MIG 250 MIG/MAG Welding Machine, serial 618220220133. DC inverter on wheeled trolley with wire spool holder, 2T/4T switch, welding range 50A/16.5V~250A/26.5V, open circuit voltage 45V, duty cycle 60% at 250A and 100% at 194A, input 3~ 400V, 50…
Not placed in a production line

Bench Drilling Machine PROMA
Lot 8060403 · 2014
PROMA Bench Drilling Machine, year 2014, serial 141824. Spindle taper Mk II, with 12 speeds across a range of 180-2740 rpm and a maximum drilling diameter of 20 mm. Power input 0.75 kW on 3/N/PE AC 400V 50Hz, motor protection IP 54, weight 61 kg. Supplied with...
Not placed in a production line

Belt Grinding Machine C. & E. Fein GmbH GI752H
Lot 8060404
C. & E. Fein GI752H Belt Grinding Machine, serial 2022-11.023728. Rated at 3x400 V, 50 Hz or 3x440 V, 60 Hz, with power of 2600/3100 W. Maximum belt speed is 36 m/s and maximum rotational speed is 3450 RpM.
Not placed in a production line

Drilling and Milling Machine Bernardo KF 25 Pro / V
Lot 8060405 · 2017
Bernardo KF 25 Pro / V Drilling and Milling Machine, year 2017, serial 2516125. Rated voltage 230V, frequency 50 Hz, power 0,9 kW, rated current 3,75 A, weight 145 kg. Supplied with a steel work bench, Elko B150 bench grinder, Proma BKN-1500 tool grinder, mach...
Not placed in a production line

Air Compressor Güde KOMPRESSOR 415/10/50 N
Lot 8060406 · 2020
Güde KOMPRESSOR 415/10/50 N Air Compressor, year 2020, serial 74265. Rated at 1/230 VAC, 50 Hz, with 2,2 kW / 3,0 HP, 10 bar / 145 PSI pressure and a 50 l tank. Air intake 435,00 L/Min. / 15,4 CFM, air delivery 302,00 L/Min. / 10,7 CFM, speed 1150 RPM.
Not placed in a production line

MIG Welding Machine Iskravar MIG 240/4 puls
Lot 8060407
Iskravar MIG 240/4 puls MIG Welding Machine. Three-phase, 50 Hz, supply voltage U1 400 V, welding range 30A / 15,5V - 240A / 26,0V, duty cycle 35%: I2 240A, U2 26V, protection class IP 23, insulation class H, cooling AF. Supplied with a welding torch and a mai...
Not placed in a production line

MIG/MAG Welding Machine Telwin TECHNOMIG 223 TREO SYNERGIC
Lot 8060408
Telwin TECHNOMIG 223 TREO SYNERGIC MIG/MAG Welding Machine. Inverter machine with synergic control on a two-wheel trolley, rated 1~ / 230 V, 50/60 Hz, IP 23, with MIG/MAG range 20A/15V - 180A/23V (max 220A). Supplied with a welding torch, earth clamp, Ar/CO2 g...
Not placed in a production line

MIG/MAG Welding Machine Telwin TECHNOMIG 223 TREO SYNERGIC
Lot 8060409
Telwin TECHNOMIG 223 TREO SYNERGIC MIG/MAG Welding Machine. Single-phase inverter with Synergic control panel and display, mounted on a two-wheel trolley, rated 230 V, I1 max 32 A, IP 23, MIG/MAG 20 A/15 V - 180 A/23 V (max 220 A). Supplied with a welding torc...
Not placed in a production line

Geared Head Drilling Machine Holzmann Maschinen ZS 50APS
Lot 8060410 · 2022
Holzmann Maschinen ZS 50APS Geared Head Drilling Machine, year 2022, serial 302420322. Rated voltage 400 V, 3~, 50 Hz, power 1,3 kW/1,8 kW, spindle speed n=50-2520 min-1 (12 steps), weight 390 kg. Supplied with a Holzmann ZX7025A cross table, a machine vise an...
Not placed in a production line

Double Bench Grinder metabo DSD 250
Lot 8060411
metabo DSD 250 Double Bench Grinder. Rated voltage 400 V 3~, 50 Hz, with speed n 1490/min (rpm) and current 2,0 A at 50 Hz; at 60 Hz, 1780/min (rpm) and 1,6 A. Power 900 W, duty type S 2-30 min, D max 250 mm. Supplied with a steel stand and a transparent prote...
Not placed in a production line

Metal Band Saw OPTIMUM S 181G
Lot 8060412
OPTIMUM S 181G Metal Band Saw, year 10.2015, serial 15104043. Power 0,75 kW at 400V/50Hz, with blade speeds of 45/65/77 m/min and blade dimensions of 2.362 x 19 x 0,9 mm. Weight 130 kg net. Supplied with a mobile base with coolant tank.
Not placed in a production line

Spare Parts Stock Omron, Mitsubishi Electric and more
Lot 8060413
Spare Parts Stock, Omron, Mitsubishi Electric and more.
Not placed in a production line

IT Spare Parts Stock Lenovo, Siemens and more
Lot 8060415
IT Spare Parts Stock , Lenovo, Siemens and more. Mixed IT warehouse stock, partly boxed and partly loose.
Not placed in a production line

(2) Work Bench Jot KEl
Lot 8060430
Jot KEl Work Bench. Blue steel frame with a plywood worktop and one lockable drawer. One worktop is covered with a ribbed rubber mat, while the other is bare wood.
Not placed in a production line

Electrical Installation Components SEZ, finder, TDK-Lambda
Lot 8060436
Electrical Installation Components, SEZ, finder, TDK-Lambda. Power supply data: output 24 VDC / 20A, input frequency 47-63Hz. Supplied with a TDK-Lambda DPP480-24-1 power supply, a metal cabinet, a crate of gas springs, two crates of relays, relay sockets and ...
Not placed in a production line

Air Compressor Makita AC1350
Lot 8060561 · 2014
Makita AC1350 Air Compressor, year 2014, serial 221401778. Rated at 230 V, 50 Hz, 1~ with 2.1 kW input power, 1.5/2 kW/HP output power and a speed of 2850 min-1, with a maximum pressure of 10/145 bar/psi, an air delivery of 240 l/min, 8.4 cfm and a tank volume...
Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Facility, IT & Office — 29 lots · 29 units

Three-Phase Transformer WYES WY3PC-15KAU
Lot 8060057 · 2022
WYES WY3PC-15KAU Three-Phase Transformer, year 2022, serial 2112300726. Rated 15kVA, 3~, 50/60Hz, with a primary voltage of 380V and a secondary voltage of 220V, primary current 23A and secondary current 39.4A. Insulation class H, short circuit voltage 3%, wit...
Not placed in a production line

Shoe Cleaning Machine TAEHOON CST GS-404H
Lot 8060062
TAEHOON CST GS-404H Shoe Cleaning Machine. Mobile stainless steel unit with two brush grate sections, a handrail frame, sensor boxes on the handrail and a power cable. Detergent to water ratio 1:100 per instruction sticker.
Not placed in a production line

Uninterruptible Power Supply Salicru SLC-5000-TWIN RT2 B1
Lot 8060104
Salicru SLC-5000-TWIN RT2 B1 Uninterruptible Power Supply, serial 291821D07686. Rated input 230VAC, 26A, 1 + N Ph, 50/60Hz; output 230VAC, 22A, 5000 VA, 4000 W, 1 + N Ph, Icc=6kA; bypass 230VAC, 26A, 50/60Hz, 1 + N Ph. Supplied with a Salicru SLC TWIN RT batte...
Not placed in a production line

Cleanroom Gowning Station
Lot 8060107
Cleanroom Gowning Stationt. Cleanroom Gowning Station on casters with levelling feet, with a lower compartment with two hinged doors and two inner bins. The top has two round openings labelled "Použité / USED" and rows of square compartments labelled S, M and ...
Not placed in a production line

Fan Blower Unit
Lot 8060143
Fan Blower Unit, serial SP1-FB-00095-B3. Mobile cabinet on castors with two centrifugal high-pressure blowers mounted one above the other and one axial cooling fan. Each 3-phase blower: 0.4 kW, 2820 / 3380 r.p.m., air volume 7.2 / 9.0 m³/min, pressure 150 / 18...
Not placed in a production line

Automatic Voltage Regulator SHINWOO POWER TECHNOLOGY CO.,LTD.
Lot 8060221 · 2025
Automatic Voltage Regulator, SHINWOO POWER TECHNOLOGY CO.,LTD., year 2025, serial 2502C12909. Rated at 150 kVA with 97% efficiency, input 3 Ø 3 W 400 V (± 10%), 50 Hz and output 3 Ø 3 W 220 V (± 2%), 50 Hz at 393.7 A. Analogue meters, phase selector switches a...
Not placed in a production line

Automatic Voltage Regulator TIAC SX - 100
Lot 8060222 · 2022
TIAC SX - 100 Automatic Voltage Regulator, year 2022, serial 221135050365. Capacity 3Ø 50 KVA, input 3Ø 3W 380 V ±15 %, 50 Hz, output 3Ø 4W 220 V ±2 %, 50 Hz, output current 131 A, efficiency 90 % min., digital tap changing, dimensions approx. 700 mm x 700 mm ...
Not placed in a production line

Automatic Voltage Regulator TIAC SX - 100
Lot 8060223 · 2022
TIAC SX - 100 Automatic Voltage Regulator, year 2022, serial 22113S050366. Capacity 3Ø 50 KVA, with input 3Ø 3W 380 V, ±15 %, 50 Hz and output 3Ø 4W 220 V, ±2 %, output current 131 A. Efficiency 90 % min., Digital Tap Changing, with analog meters, an AVR/Bypas...
Not placed in a production line

Line Matrix Printer Printronix P7220
Lot 8060382
Printronix P7220 Line Matrix Printer, serial 6R06330014. Floor-standing cabinet version with control panel, LCD display and continuous form paper feed, series marking PSA3.
Not placed in a production line

Defibrillator Progetti Rescue 230
Lot 8060383
Progetti Rescue 230 Defibrillator, serial RS-15041832. Portable unit with display, integrated printer, SpO2 connection and ECG connection, with an energy scale of 10, 20, 30, 50, 100, 150, 200 and 230. Supplied with a carrying bag, hand paddles with coiled cab...
Not placed in a production line

Steam Sterilizer Tuttnauer 2340MK
Lot 8060384 · 2007
Tuttnauer 2340MK Steam Sterilizer, year 2007, serial 2605727. Chamber volume 19 L, max. pressure 2.80 bar, test pressure 4.30 bar, rated voltage 230 V~, 1 Ph, 50/60 Hz at 9.6 A, with a temperature selector from 212°F / 100°C to 273°F / 134°C. Supplied with (3)...
Not placed in a production line

Mixed IT Equipment and Tools Dell, Lenovo, Lexmark
Lot 8060416
Mixed IT Equipment and Tools, Dell, Lenovo, Lexmark.
Not placed in a production line

Solid State Drives and Hard Disk Drives Samsung and Seagate
Lot 8060418
Samsung and Seagate Solid State Drives and Hard Disk Drives. Comprises V-NAND SSD 850 EVO mSATA, 500GB; SSD 870 EVO SATA 2.5", 250GB, read speed 560MB/s, write speed 530MB/s; SSD 980 NVMe M.2, 500GB, read speed 3500MB/s; and BarraCuda 1TB SATA hard disk drive,...
Not placed in a production line

Defibrillator CU Medical Systems, Inc. CU-ER1
Lot 8060420 · 2012
CU Medical Systems CU-ER1 Defibrillator, year 2012, serial A2K21A050. Recorded data: input 12V DC, 3.6A; rechargeable battery 12V, 4.5A; protection class IP 21.
Not placed in a production line

Defibrillator CU Medical Systems, Inc. CU-ER1
Lot 8060421 · 2013
CU Medical Systems CU-ER1 Defibrillator, year 2013, serial A2K43C020. Front marking Paramedic, Made in Korea. Input 12V DC, 3.6A, with a rechargeable battery of 12V, 4.5A. Protection class IP 21, CE marking 0470.
Not placed in a production line

(8) Industrial Vacuum Cleaner IPC MEC 429 XP
Lot 8060433
IPC MEC 429 XP Industrial Vacuum Cleaner. Rated voltage 220-240 V~ at 50/60 Hz, with a power of 2400 W and a maximum power of 2800 W max. Protection rating IPX4, with a recorded weight of 75 Kg max.
Not placed in a production line

(2) Single Disc Floor Machines Columbus, Viper E 400 S
Lot 8060434
Single Disc Floor Machines, Columbus, Viper E 400 S. Each machine is fitted with a solution tank, with the tank mounted on the E 400 S.
Not placed in a production line

Industrial Vacuum Cleaners and Cleanroom Vacuum Cleaners IPC, Einhell, CICO
Lot 8060439
Industrial Vacuum Cleaners and Cleanroom Vacuum Cleaners, IPC, Einhell, CICO. IPC MEC 429 XP: rated voltage 220-240 V~, 50/60 Hz, power 2400 W, power max. 2800 W, protection class IPX4. CR-5050SM: rated voltage 220 V~, 60 Hz, 1,350 W, 6.14 A, IP rating IPX0. S...
Not placed in a production line

(9) Vacuum Cleaner IPC MEC 429 XP
Lot 8060440
IPC MEC 429 XP Vacuum Cleaner. Rated voltage 220-240 V~, 50/60 Hz, with power of 2400 W and maximum power of 2800 W. Protection class IPX4, 75 kg max. Supplied with suction hoses (where fitted).
Not placed in a production line

3D Printer Filament Spools Filament PM, Form Futura
Lot 8060449
3D Printer Filament Spools, Filament PM, Form Futura. Mixed lot of spools in three cardboard boxes, in various colours and spool types, partly used.
Not placed in a production line

(9) Air Humidifier Boneco
Lot 8060533
Boneco Air Humidifier.
Not placed in a production line

(3) USB Duplicator MultiBurn
Lot 8060537
MultiBurn USB Duplicator. Tower housing with an LCD display, control buttons and USB ports in four rows on the front.
Not placed in a production line

UPS Altron FIELD 20
Lot 8060546
Altron FIELD 20 UPS, serial MA1154E2I0008. Rated power 20 KVA - 3Φ+N, power rating 20000VA, 18000W. Input 380/220V ~ 415/240V, max. 30.3A, 50/60Hz 3Ø; output 380/220V, 30.3A, 400/230V, 29A or 415/240V, 27.8A, all 50/60Hz 3Ø.
Not placed in a production line

Laser Projector Samsung SP-LSP9TFA
Lot 8060552
Samsung SP-LSP9TFA Laser Projector, serial 4JS639FR900057B. Rated voltage AC100-240V, 50/60Hz, rated current 4.1 A, laser product risk group 2, DLP marking on plate. Supplied with 2 Samsung speakers.
Not placed in a production line

Dental Unit A-dec 335
Lot 8060553 · 2014
A-dec 335 Dental Unit, year 2014, serial 14H44706. Comprises a patient chair, delivery arm with handpiece hoses, assistant instrument holder, control panel with display and cuspidor, with a rated voltage of 100/110-120/220-240 V~ at 50-60 Hz. Supplied with an ...
Not placed in a production line

(2) Drum Fan MASTER
Lot 8060562
MASTER Drum Fan. Fitted with a protective grille and a three-blade impeller, mounted on a tubular frame with castors.
Not placed in a production line

Drum Fan MCS DF 30 P
Lot 8060557 · 2016
MCS DF 30 P Drum Fan, year 2016, serial 86B36008678. Air flow 10200 m³/h, rated voltage 220-240 V, frequency 50 Hz, power 315 W, protection class IP20, on a yellow tubular frame with wheels and a rotary speed control switch (Off / Low / High). Supplied with a ...
Not placed in a production line

Industrial Vacuum Cleaner, Cleanroom Vacuum Cleaner IPC MEC 429 XP, CR-5050SM
Lot 8060558
IPC MEC 429 XP, CR-5050SM Industrial Vacuum Cleaner, Cleanroom Vacuum Cleaner. Stainless steel construction on castors, with two cleanroom units having a transparent dome cover. Supplied with a suction tube and suction hoses.
Not placed in a production line

Safety Helmets and Safety Harnesses Edelrid, JSP
Lot 8060560
Safety Helmets and Safety Harnesses, Edelrid, JSP. Hard hats in white, yellow, blue and green, packed in a cardboard box, together with safety harnesses in plastic boxes. Supplied with safety helmets in assorted colours and Edelrid safety harnesses.
Not placed in a production line

ELECTRONICS & DISPLAY PLANT · OTHER PLANT EQUIPMENT

Other SMT & PCB Items — 4 lots · 4 units

Bond Tester Nordson DAGE 4000PLUS MAINFRAME
Lot 8060144 · 2022
Nordson DAGE 4000PLUS MAINFRAME Bond Tester, year 2022, serial 20032222. Rated 100-240V AC, 1 phase, 50-60Hz, 350W, full load current 3A, fuse T 4A H / 250V. Supplied with a Nordson DAGE S250G test head, a Nordson DAGE 7932911 stage, an Olympus SZ51 stereo mic…
Not placed in a production line

EMI Test Receiver Rohde&Schwarz; ESPI
Lot 8060289
Rohde&Schwarz; ESPI EMI Test Receiver. Frequency range 9 kHz ... 3 GHz, order number 1164.6407.03. Rated voltage 100-240VAC, current 3.1-1.3A, frequency 50-400Hz.
Not placed in a production line

Rack-Mount Electronic Units, PP Band Splicing Jig, Hand Tools
Lot 8060532
Rack-Mount Electronic Units, PP Band Splicing Jig, Hand Tools. Comprising amplifiers, signal units and modulator-type units with analogue meters, a PP band splicing jig with current meter, action lamp, test switch, timer and power switch, housed electronic uni…
Not placed in a production line

Drawer Cabinet, PCB Exposure Unit, Respirator Masks 3M
Lot 8060535
3M Drawer Cabinet, PCB Exposure Unit, Respirator Masks. The PCB Exposure Unit has a metal case with a rotary control and film masks under a glass cover. The Plastic Drawer Cabinet holds screws. Supplied with a box of 3M 6000 Full Face Mask.
Not placed in a production line

REFRIGERATOR MANUFACTURING PLANT · EQUIPMENT CATALOGUE

Category-wise machinery summary

Units follow the quantities stated in the plant catalogue. Each lot is listed with its catalogue sheet or photographs on the following pages.

Equipment category	Group	Lots	Units
Sheet-Metal Forming Lines	Plant equipment	4	4
Coil Cutting, Slitting & Punching	Plant equipment	3	3
Plastics Extrusion & Regrind	Plant equipment	2	2
Thermoforming Machines	Plant equipment	6	6
Laser Cutting Cell	Plant equipment	1	1
Foaming Plants	Plant equipment	3	3
Robot Workstation	Plant equipment	1	1
Powder Paint Shop	Plant equipment	5	5
Packaging Machines	Plant equipment	2	2
Evaporator Lines	Plant equipment	3	3
Workshop, Logistics & IT	Plant equipment	1	1
TOTAL		31	31

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Sheet-Metal Forming Lines — 4 lots · 4 units



MAS metal sheet forming line (fridge door panels)
Lot 6022001 · 2023
MAS Automazioni · 400 V 50 Hz · air 4.5–6 bar · 10 s cycle · 38.1 × 9.6 × 4.4 m · Laser-measured sheet loading, punching/bending station with 2 blade sets, 2 spare forming slots, 2nd punching station, 2 scrap conveyors, Siemens S7. 89,963 pieces made.
Used in: Door Panel Line A · Punching & bending



QS metal sheet forming line (top panels)
Lot 6022002 · 2004
QS Group · 400 V 50 Hz · 25 s cycle · coil 632 × 0.5 mm · 34.6 × 5.2 m · Coil-fed shearing, bending and punching stations R89, R109, R125, R145, R157, R189. Automatic changeover.
Used in: Top Panel Line · Coil decoiling; Top Panel Line · Shearing, bending & punching (R89–R189)



COSMA metal sheet forming line (side panels)
Lot 6022004 · 2018
Cosma, Vigevano · 400 V 50 Hz · 10 s per panel · 67.5 × 11.8 × 3.9 m · Sheet checking for size and weight, 6 bending/punching/cutting stations, automatic loading/unloading, 2 KUKA pick-and-place robots, fenced 67 m area.
Used in: Side Panel Line · Sheet check & loading; Side Panel Line · Punching, bending & cutting (6 stations); Side Panel Line · Robot unloading & stacking



TEAS metal sheet forming line (fridge door panels)
Lot 6022005 · 2010
TEAS · 400 V 50 Hz · 27 s cycle · 58.0 × 5.0 m · 12 stations for punching, long-side and short-side bending and mechanical insertion of fixings.
Used in: Door Panel Line B · Punching, bending & fixing insertion (12 stations)

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Coil Cutting, Slitting & Punching — 3 lots · 3 units



Sacma cutting and slitting line
Lot 6022003 · 1975
Sacma, Vigevano · 400 V 50 Hz · decoiling up to 12 m/min · 23.5 × 4.8 m · Coil 300–1280 mm wide, max 12 t; sheet 450–3000 mm; 0.4–1.0 mm thick.
Used in: Door Panel Line A · Coil slitting & cut-to-length; Door Panel Line B · Coil slitting & cut-to-length



QS metal sheet cutting press (cut-to-length line)
Lot 6022006 · 2004
QS Group · 400 V 50 Hz · 20 m/min (max 30) · 16.5 × 8.0 m · Coil 500–900 mm wide, sheet up to 2100 mm, 0.4–0.6 mm. Changeover about 15 min.
Used in: Side Panel Line · Coil decoiling & cut-to-length



Konkoly punching machine
Lot 6022015 · 2020
Konkoly Electro · 400 V · 40 A · 6 bar · About 30 s cycle; 10–30 min changeover depending on tooling. 5,500 kg.
Used in: Door Panel Line B · Extra punching

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Plastics Extrusion & Regrind — 2 lots · 2 units



Battenfeld BEX-1-150-32-D-V / BEX 45-25E co-extrusion sheet line

Lot 6022008 · 1999

Battenfeld-cincinnati · 50 Hz · 6 bar · 1000–1200 kg/h · 2 feed silos, metal separators, main extruder 7 heating zones + vacuum zone, co-extruder 3 zones, 3 calenders, thickness gauge, corona treatment, automatic coil changing, edge slitting. Sheet 1–5 mm, up ...

Used in: Sheet Extrusion Line · Co-extrusion, calendering & winding



Rapid 500-120 granulator (1200 kg/h)

Lot 6022009 · 2003

Rapid Granulator · 37 kW · rotor Ø450 mm · Up to 1,200 kg/h (≈450–500 kg/h on liner scrap). 3-blade open rotor, 8 mm screen, 3,600 kg.

Used in: Sheet Extrusion Line · Granulate feeding & regrind

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Thermoforming Machines — 6 lots · 6 units



QS VF-20-08-02 roll-feed thermoforming machine (door liners)
Lot 6022007 · 2003
QS · 400 V 50 Hz · 280 kW · 465 A · 10 × 3 × 5 m · Roll unwind (max Ø1200, 570–850 mm wide), upper/lower heating 2 × 67.2 kW, forming, clamping ring, pre-stretch/cooling dome, 2 × 240 m³/h vacuum pumps. Workshop manuals.
Used in: Door Liner Line · Roll-fed thermoforming 1



COMI BL 2200x900x600 thermoforming machine (inner liners)
Lot 6022010 · 2013
COMI · 380 V 50 Hz · 269 kW · Forming 2200 × 900 mm, depth 600 mm, 3 loading stations, heating station, pressure + vacuum forming, 4 trimming presses (guillotine). 400 kN platen. 30 t.
Used in: Inner Liner Line · Thermoforming 1



COMI thermoforming machine (inner liners)
Lot 6022011 · 2007
COMI · 375 kW · Forming 2005 × 905 mm, depth 550 mm, 3 loading stations, 750 m³/h vacuum, 4 trimming presses. 35 t.
Used in: Inner Liner Line · Thermoforming 2



Illig UA 200/1g thermoforming machine (door liners)
Lot 6022012 · 1999
Adolf Illig · 3 × 380–400 V · ~105 kW · Forming 1960 × 960 mm, draw depth 600 mm, roll-fed (QS unwind Ø1200), ±0.2 mm indexing.
Used in: Door Liner Line · Roll-fed thermoforming 2



COMI SL200x90 NG DX thermoforming machine (inner liners)
Lot 6022013 · 1993
COMI / Rigo · 399 kW · Mould base 2000 × 900 mm, part height 550 mm, 570 m³/h vacuum, 4,000 L tanks. 25 t.
Used in: Inner Liner Line · Thermoforming 3



COMI HEDL 2000x800x200 thermoforming machine (door liners)
Lot 6022014 · 2014
COMI · 264 kW · Coil-fed 580–900 mm, frame 2004 × 804 mm, part height 150/200 mm, upper heating 168 kW, trimming press. 20 t.
Used in: Door Liner Line · Roll-fed thermoforming 3

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Laser Cutting Cell — 1 lots · 1 units



ELEN Blade RF 333 laser cutting cell on ABB robot (inner-liner punching)

Lot 6022016 · 2013

TEAS / ELEN / ABB · 400 V 50 Hz · 600 W laser · ABB robot with IRC5 controller (36,000 h), enclosure, turning table and air extraction. About 60 s cycle.

Used in: Inner Liner Line · Laser punching of liners

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Foaming Plants — 3 lots · 3 units



KraussMaffei cabinet foaming plant (8 fixtures)
Lot 6022017 · 2008
KraussMaffei Italia · Polyol/cyclopentane + isocyanate · 30.5 × 16 × 8 m · Dry system: 8 (2 × 4) fixtures, face-up foaming, cabinets on pallets. Wet system on mezzanine: 500 L tanks, pre-mixer, mixing heads 2,000 and 1,300 g/s, ATEX enclosure, mould storage fo...
Used in: Cabinet Line · Cabinet foaming



Cannon twin side-by-side door foaming machine (6-mould carousel)
Lot 6022018 · 1999
Cannon (renovated by TEAS) · 400 V 50 Hz · Puromat 30 · 5.2 × 4.2 m · Fixture 2300 × 800 mm, closing height 160 mm, about 60 s cycle.
Used in: Door Line · Door foaming (twin carousel)



KraussMaffei door foaming machine (6-mould carousel)
Lot 6022020 · 2012
KraussMaffei Italy · 400 V 50 Hz · 5.5 × 5.5 m · Foaming pallet 2500 × 800 × 200 mm, about 60 s cycle, tooling racks (tooling not included).
Used in: Door Line · Door foaming (carousel)

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Robot Workstation — 1 lots · 1 units



KUKA KR210 L180-2 vacuum insulation panel pressing workstation

Lot 6022021 · 2005

KUKA · Renewed and installed 2019, about 1 million cycles, table 2500 × 1000 mm, manual load/unload.

Used in: Insulation Panel Cell · Vacuum insulation panel pressing

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Powder Paint Shop — 5 lots · 5 units



Conveyor-fed industrial washing machine (pre-treatment)
Lot 6022022
1,200 kW hot-water burner · pumps 8 × 11 kW + 6 × 7 kW · 60 m + 60 m dryer · Ion-exchange washing tunnel and skid hot-air dryer in snake layout, 60 m each.
Used in: Powder Coating Line · Washing & drying (pre-treatment)



Wagner manual powder painting booth
Lot 6022023 · 2001
Wagner · 4 × 1.7 m · Twin operator platforms, doors both sides, stainless steel, 2 dedusting units. Not in use.
Used in: Powder Coating Line · Manual touch-up booth



Wagner automatic powder painting line
Lot 6022024 · 2001
Wagner · Wagner Itep control (2019) · 2 × 10-nozzle and 2 × 2-nozzle guns, 2 dedusters, paint recovery unit, Parker Hiross oil remover (2019).
Used in: Powder Coating Line · Automatic powder coating



Paint line drying oven (2 × 630 kW burners)
Lot 6022025
2 × 630 kW gas burners · 120 m incl. cooling · Curing oven with cooling zone, total length 120 m.
Used in: Powder Coating Line · Curing oven & cooling



Flex coop powder painting overhead conveyor (388 m)
Lot 6022026 · 2001
Flex coop · 400 V 50 Hz · 4 m/min · 388 m · 385 hanging points at 800 mm. Chain renewed 2019.
Used in: Powder Coating Line · Hanging & overhead conveyor

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Packaging Machines — 2 lots · 2 units



Thimon Coverpal 1250 shrink-hood packaging machine
Lot 6022027 · 1999
Thimon · Natural-gas shrink hood · 7.2 × 4.2 × 4.3 m · Over 7 million cycles; product up to 600 × 600 × 2000 mm.
Used in: Cabinet Line · Shrink-hood packing



Thimon Coverpal 1250 shrink-hood packaging machine
Lot 6022028 · 1999
Thimon · Natural-gas shrink hood · 7.2 × 4.2 × 4.3 m · Over 7 million cycles; product up to 600 × 600 × 2000 mm.
Used in: Packing Line 2 · Shrink-hood packing

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Evaporator Lines — 3 lots · 3 units



TEAS wrapped evaporator line
Lot 6022029 · 2013
TEAS · 80 kW · 400 V · 5.5–6 bar · 22 × 11 m · 396 pcs per shift. Freezer tape application, tube wrapping with aluminium tape and conductive paste. Al tube Ø7.5 × 0.75 mm.
Used in: Wrapped Evaporator Line · Freezer tape & tube wrapping



TEAS freezer compartment evaporator line
Lot 6022030 · 1999
TEAS · 5.5–6 bar · 10 × 9.5 m · About 400 pcs per shift, 67.5 s cycle. Al sheet 0.35 mm, Al tube Ø7.5 mm.
Used in: Freezer Evaporator Line · Compartment forming & tube taping (automatic)



Manual freezer compartment evaporator line (combi fridges)
Lot 6022031
Station 1 compartment forming, station 2 tube bending and taping, station 3 tube diameter reduction.
Used in: Freezer Evaporator Line · Compartment forming, tube bending & reduction (manual)

REFRIGERATOR MANUFACTURING PLANT · PLANT EQUIPMENT

Workshop, Logistics & IT — 1 lots · 1 units

Workshop, logistics and IT equipment (partner online auctions)
Lot 60200000
Separate online auctions run by the partner auction house: measuring instruments, workshop, logistics, spare parts and IT.
Used in: Support · Workshop, logistics & IT

AUTOMOTIVE PRESS HARDENING PLANT · EQUIPMENT CATALOGUE

Category-wise machinery summary

Units follow the quantities stated in the plant catalogue. Each lot is listed with its catalogue sheet or photographs on the following pages.

Equipment category	Group	Lots	Units
Press Hardening Lines & Furnaces	Plant equipment	5	5
Blanking Lines & Cold Forming	Plant equipment	3	3
3D Laser Cutting Cells	Plant equipment	9	9
Machine Tool Shop	Plant equipment	9	9
Robotics & Automation	Plant equipment	1	1
Surface Finishing	Plant equipment	2	2
CMM & Quality Inspection	Plant equipment	2	2
TOTAL		31	31

AUTOMOTIVE PRESS HARDENING PLANT · PLANT EQUIPMENT

Press Hardening Lines & Furnaces — 5 lots · 5 units



Schuler SHC 1200-3.2x1.4 hydraulic press hardening line
Lot HF-1 · 2007
1,200 t · stroke 1,200 mm · 360 mm/s · Newest and fastest press hardening line in the plant.
Used in: Line 1 · Furnace heating; Line 1 · Hot forming & die quenching



Schuler HPDZB 500-2150/500 hydraulic press hardening line
Lot HF-5 · 2002
500 t · stroke 1,200 mm · 110 mm/s · Smallest press hardening line, suited to smaller parts.
Used in: Line 2 · Furnace heating; Line 2 · Hot forming & die quenching



Cavenaghi CRH12 000KNKM hydraulic press hardening line
Lot HF-6 · 1994
1,200 t · stroke 720 mm · 120 mm/s
Used in: Line 3 · Furnace heating; Line 3 · Hot forming & die quenching



Cavenaghi CRCK 15001 hydraulic press hardening line
Lot HF-7 · 1989
1,200 t · stroke 800 mm · 60 mm/s · Oldest and slowest press hardening line.
Used in: Line 4 · Furnace heating; Line 4 · Hot forming & die quenching



ITSAB central furnace atmosphere control system
Lot HF-8 · 2025
Central gas atmosphere control for all furnaces · New in 2025. One central system serves all four press hardening lines.
Used in: Line 1 · Furnace atmosphere control; Line 2 · Furnace atmosphere control; Line 3 · Furnace atmosphere control; Line 4 · Furnace atmosphere control

AUTOMOTIVE PRESS HARDENING PLANT · PLANT EQUIPMENT

Blanking Lines & Cold Forming — 3 lots · 3 units



Müller-Weingarten HUQ 630.28 blanking line
Lot HF-3 · 1996/2012
630 t · 15–60 strokes/min · Mechanical blanking line, rebuilt 2012. Serves Lines 1 and 2.
Used in: Line 1 · Blanking; Line 2 · Blanking



Benelli blanking line
Lot HF-4 · 1962
250 t · stroke 150 mm · Oldest machine in the plant (1962). Serves Lines 3 and 4; check condition before relying on it.
Used in: Line 3 · Blanking; Line 4 · Blanking



Schuler SML4-1000-3,6x2,6-1100 deep drawing press
Lot HF-2 · 2007
1,000 t · stroke 1,200 mm · 400 kJ at 9 strokes/min · Cold forming press for deep-drawn parts, separate from the hot forming lines.
Used in: Support · Cold forming

AUTOMOTIVE PRESS HARDENING PLANT · PLANT EQUIPMENT

3D Laser Cutting Cells — 9 lots · 9 units



2 × Trumpf TruLaser Cell 8030 L45
Lot LC-1 · 2015
5-axis 3D laser · TruDisk 3001 · 3 kW each · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 1 · 3D laser trimming



2 × Trumpf TruLaser Cell 8030 L45
Lot LC-2 · 2015
5-axis 3D laser · TruDisk 3001 · 3 kW each · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 1 · 3D laser trimming



2 × Trumpf TruLaser Cell 8030 L45
Lot LC-3 · 2014 / 2015
5-axis 3D laser · TruDisk 3001 · 3 kW each · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 2 · 3D laser trimming



2 × Trumpf TruLaser Cell 8030 L45
Lot LC-4 · 2014 / 2015
5-axis 3D laser · TruDisk 3001 · 3 kW each · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 2 · 3D laser trimming



2 × Trumpf TruLaser Cell 8030 L45 / TruLaser Cell 7040 L31
Lot LC-5 · 2014 / 2010
5-axis 3D laser · TruDisk 3001 · 3 kW / TruDisk 4001 · 4 kW · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 3 · 3D laser trimming



2 × Trumpf TruLaser Cell 8030 L45 / TruLaser Cell 7040 L31
Lot LC-6 · 2014 / 2010
5-axis 3D laser · TruDisk 3001 · 3 kW / TruDisk 4001 · 4 kW · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 3 · 3D laser trimming



2 × Trumpf TruLaser Cell 7040 L31
Lot LC-7 · 2010/2021
5-axis 3D laser · TruDisk 4001 · 4 kW each · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 4 · 3D laser trimming



2 × Trumpf TruLaser Cell 7040 L31
Lot LC-8 · 2010/2021
5-axis 3D laser · TruDisk 4001 · 4 kW each · Two laser cells per line. Laser source per cell is as listed in the seller brochure (TruDisk 3001 = 3 kW, TruDisk 4001 = 4 kW).
Used in: Line 4 · 3D laser trimming



Trumpf TruLaser Cell 8030 L45 (additional listing)
Lot LC-9
Ninth TruLaser cell listed by the seller in addition to the eight on the plant list.
Not placed in a production line

AUTOMOTIVE PRESS HARDENING PLANT · PLANT EQUIPMENT

Machine Tool Shop — 9 lots · 9 units



Deckel Maho DMU 80P duoBlock 5-axis machining center
Lot TS-1 · 2008
5-axis · 1,250 / 710 / 710 mm · 12,000 rpm · Travels as listed in the seller brochure.
Used in: Support · Tool shop



Deckel Maho DMU 100 monoBlock 5-axis machining center
Lot TS-2 · 2007
5-axis · 800 / 800 / 800 mm · 18,000 rpm · Travels as listed in the seller brochure.
Used in: Support · Tool shop



Deckel Maho DMU 125 P hi-dyn 5-axis machining center
Lot TS-3 · 2004
5-axis · 1,250 / 880 / 800 mm · 12,000 rpm
Used in: Support · Tool shop



Matsuura FX-10 3-axis high-speed machining center
Lot TS-4 · 1997
3-axis · 2,000 / 1,500 / 400 mm · 27,000 rpm
Used in: Support · Tool shop



Danobat RMT-1600 CNC-1 surface grinding machine
Lot TS-5 · 1993
Grinding length 1,600 mm · wheel 1,150 rpm
Used in: Support · Tool shop



Zayer KPU/AR 5-axis machining center
Lot TS-6 · 2004
5-axis · 3,700 / 3,050 / 1,100 mm · 6,000 rpm · Large die machining center. Travels paired to this machine by inference from the seller brochure.
Used in: Support · Tool shop



Nicolas Correa CF 20 20 CNC horizontal milling machine
Lot TS-7 · 1996
1,800 / 800 / 800 mm · 2,500 rpm · Travels paired to this machine by inference from the seller brochure.
Used in: Support · Tool shop



Pilous ARG 300 plus F automatic band saw
Lot TS-8 · 2025
Automatic band saw
Used in: Support · Tool shop



Jakobsen 1032 surface grinding machine
Lot TS-9
Surface grinder
Used in: Support · Tool shop

AUTOMOTIVE PRESS HARDENING PLANT · PLANT EQUIPMENT

Robotics & Automation — 1 lots · 1 units



ABB automated grinding robot cell (4 robots)
Lot RA-1 · 2019
4 grinding robots · Robotic grinding cell, used for die and part finishing.
Used in: Support · Robot grinding

AUTOMOTIVE PRESS HARDENING PLANT · PLANT EQUIPMENT

Surface Finishing — 2 lots · 2 units




Schlick Roto-jet shot blasting system
Lot SF-1 · 1988
Roto-jet blast machine · Serves Lines 1 and 2.
Used in: Line 1 · Shot blasting; Line 2 · Shot blasting



Spencer & Halstead 12-wheel monorail shot blasting system
Lot SF-2 · 1995
12 blast wheels · monorail hanger · Serves Lines 3 and 4.
Used in: Line 3 · Shot blasting; Line 4 · Shot blasting

AUTOMOTIVE PRESS HARDENING PLANT · PLANT EQUIPMENT

CMM & Quality Inspection — 2 lots · 2 units

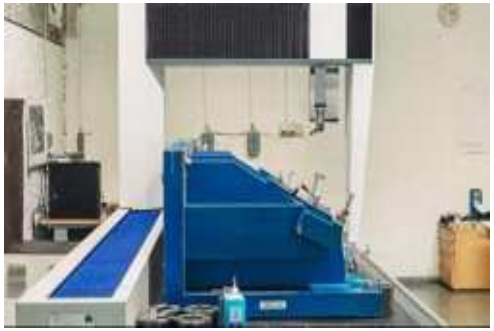

Carl Zeiss Prismo 10 CMM
Lot QC-1 · 2001
3-axis CMM · Serves Lines 3 and 4.
Used in: Line 3 · Quality inspection (CMM); Line 4 · Quality inspection (CMM)



Carl Zeiss Contura G2 RDS CMM
Lot QC-2 · 2007
3-axis CMM with RDS articulating probe head · Serves Lines 1 and 2.
Used in: Line 1 · Quality inspection (CMM); Line 2 · Quality inspection (CMM)

NOT AVAILABLE

Stations to source separately

Plant	Hall	Station	Qty	Lines
Electronics Plant	SMT Production Hall	**Component Placement (Pick & Place)**	6	SMT Line 1, SMT Line 2, SMT Line 3, SMT Line 4, SMT Line 5, SMT Line 6
Electronics Plant	SMT Production Hall	**Laser Marking**	3	SMT Line 4, SMT Line 5, SMT Line 6
Electronics Plant	SMT Production Hall	**Board Flip (Double-Sided)**	3	SMT Line 4, SMT Line 5, SMT Line 6
Electronics Plant	SMT Production Hall	**Solder Paste Inspection (SPI)**	2	SMT Line 5, SMT Line 6
Electronics Plant	SMT Production Hall	**Reflow Soldering**	1	SMT Line 6
Electronics Plant	SMT Production Hall	**Automated Optical Inspection (AOI)**	1	SMT Line 6
Electronics Plant	Injection Molding Hall	**Process cooling (chiller)**	7	IMM Line 1, IMM Line 2, IMM Line 3, IMM Line 4, IMM Line 5, IMM Line 6, IMM Line 7
Electronics Plant	Injection Molding Hall	**Sprue regrind (granulator)**	7	IMM Line 1, IMM Line 2, IMM Line 3, IMM Line 4, IMM Line 5, IMM Line 6, IMM Line 7
Electronics Plant	Injection Molding Hall	**Mold temperature control**	3	IMM Line 2, IMM Line 3, IMM Line 6
Electronics Plant	Injection Molding Hall	**Material loading**	1	IMM Line 3
Electronics Plant	Injection Molding Hall	**Quick mold change**	2	IMM Line 6, IMM Line 7
Electronics Plant	LED Module Production Hall	**LED re-placement**	2	LED Line 1, LED Line 2
Electronics Plant	LED Module Production Hall	**Reflow**	2	LED Line 1, LED Line 2
Electronics Plant	LED Module Production Hall	**Cell dispensing**	1	LED Line 4
Electronics Plant	LED Module Production Hall	**Auto stacking**	1	LED Line 4
Refrigerator Plant	Metal Forming Hall	**Door panel stacking robot**	1	Door Panel Line A
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Cabinet pre-assembly (liner into outer cabinet)**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Final assembly (compressor, piping)**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Refrigerant charging & leak test**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Functional & electrical test**	1	Cabinet Line
Refrigerator Plant	Foaming, Assembly & Packing Hall	**Door pre-assembly**	1	Door Line

Machines and photographs from the plant listings; line groupings and station assignments are an engineering assessment. Availability, condition and terms are to be confirmed with the seller.

48 stations have no machine in the listings. In the electronics plant no pick-and-place mounters, press chillers or granulators are listed; the cabinet air cooler and the cure ovens in the catalogue cannot replace a press chiller or a reflow oven. In the refrigerator plant the listing has no cabinet pre-assembly, final assembly, refrigerant charging or end-of-line test equipment. Every station of the press hardening plant has a listed machine.